




Sistema de Gestión
de Calidad
Certificado en
ISO 9001

Advanced

SISTEMA MODULAR

Catálogo
2025


TJSD
DISTRIBUIDORES

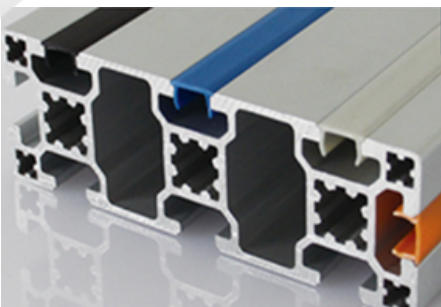



— Sistema Modular —



Fundados y ubicados en Tijuana, B.C. en 2010, con presencia en San diego, CA, somos una empresa líder en el sector de la distribución a toda la república mexicana de insumos industriales, así como expertos en proyectos de ingeniería e infraestructura.

Hemos ampliado nuestro alcance de certificación ISO 9001-2015 el día 12 de Junio del 2024, ahora a Servicio de venta de perfil estructural e insumos industriales, así como el diseño y manufactura de proyectos estructurales. En TJSD DISTRIBUIDORES ofrecemos soluciones para todas las tareas de diseño y construcción de sistemas modulares, garantizando servicio, calidad y precio.

Contáctanos para que un experto pueda ayudarte con el diseño de tus estructuras, creación de proyectos, montaje y mucho más.





INFRAESTRUCTURA



INSUMOS
INDUSTRIALES



ALUMINIO
ESTRUCTURAL



SISTEMA DE
ESTRUCTURA TUBULAR



MOBILIARIO



CUBIERTAS
ESPECIALES

ÍNDICE

Perfil estructural	02
Tornillería y Herraje.....	26
Elementos de Unión.....	42
Accesorios de Perfiles.....	88
Elementos de Piso.....	96
Elementos para instalación de paneles	140
Elementos para puertas y ventanas	150
Accesorios adicionales	181
Tipos de perforación	200

PG15- PG20

Perfil Estructural de Aluminio



15x15 2 Slots

1.11.15.015015.02
pag. 04



15x30 3 Slots

1.11.15.015030.03
pag. 04



20x20 R90 Slots

1.11.20.020020.R90.02
pag. 04



20x20 4 Slots

1.11.20.020020.04
pag. 04



20x40 6 Slots

1.11.20.020040.06
pag. 04



20x60 8 Slots

1.11.20.020060.08
pag. 04



20x80 10 Slots

1.11.20.020080.10
pag. 05



40x40 8 Slots

1.11.20.040040.08
pag. 05

PG30

Perfil Estructural de Aluminio



15x90 7 Slots

1.11.30.015090.07
pag. 07



30x30 R45 2 Slots

1.11.30.030030.R45.02
pag. 07



30x30 R90 2 Slots

1.11.30.030030.R90.02
pag. 07



30x30 2 Slots Type A

1.11.30.030030.02A
pag. 07



30x30 2 Slots Type B

1.11.30.030030.02B
pag. 07



30x30 3 Slots

1.11.30.030030.03
pag. 07



30x30 4 Slots Light

ADV 30X30-0.667/M12
pag. 07



30x30 4 Slots

1.11.30.030030.04
pag. 07



30x60 6 Slots

ADV 30X60-1.523/M12
pag. 07



30x90 8 Slots

1.11.30.030090.08
pag. 07



30x120 10 Slots

1.11.30.030120.10
pag. 08



30x150 12 Slots

1.11.30.030150.12
pag. 08




60x60 8 Slots

1.11.30.060060.08
pag. 08



60x60 L 8 Slots

1.11.30.060060.L.08
pag. 09




60x120 12 Slots

1.11.30.060120.12
pag. 09

PG40

Perfil Estructural de Aluminio



40x40 R45 2 Slots

1.11.40.040040.R45.02
pag. 11



40x40 R90 2 Slots

1.11.40.040040.R90.02
pag. 11



40x40 T45 2 Slots

1.11.40.040040.T45.02
pag. 11



40x40 1 Slot

1.11.40.040040.01
pag. 11



40x40 2 Slots Type A

1.11.40.040040.02A
pag. 11



40x40 2 Slots Type B

1.11.40.040040.02B
pag. 11



40x40 3 Slots

1.11.40.040040.03
pag. 11



40x40 4 Slots Super Light

1.11.40.040040.04SL
pag. 11



40x40 4 Slots Light

ADV 40X40-1.406/M14
pag. 12



40x40 4 Slots

1.11.40.040040.04
pag. 13



40x40 4 Slots Heavy

1.11.40.040040.04H
pag. 13



40x60 4 Slots

1.11.40.040040.04
pag. 13




40x80 6 Slots Super Light

1.11.40.040080.06SL
pag. 13




40x80 6 Slots Light

ADV 40X80-2.465/M14
pag. 13

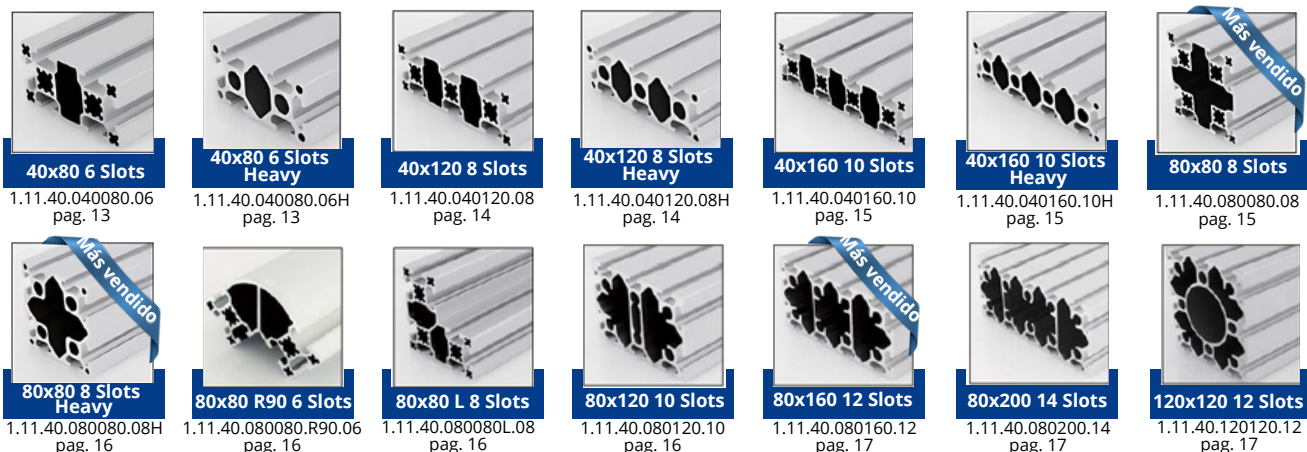

PG45-PG50-PG60

Perfil Estructural de Aluminio

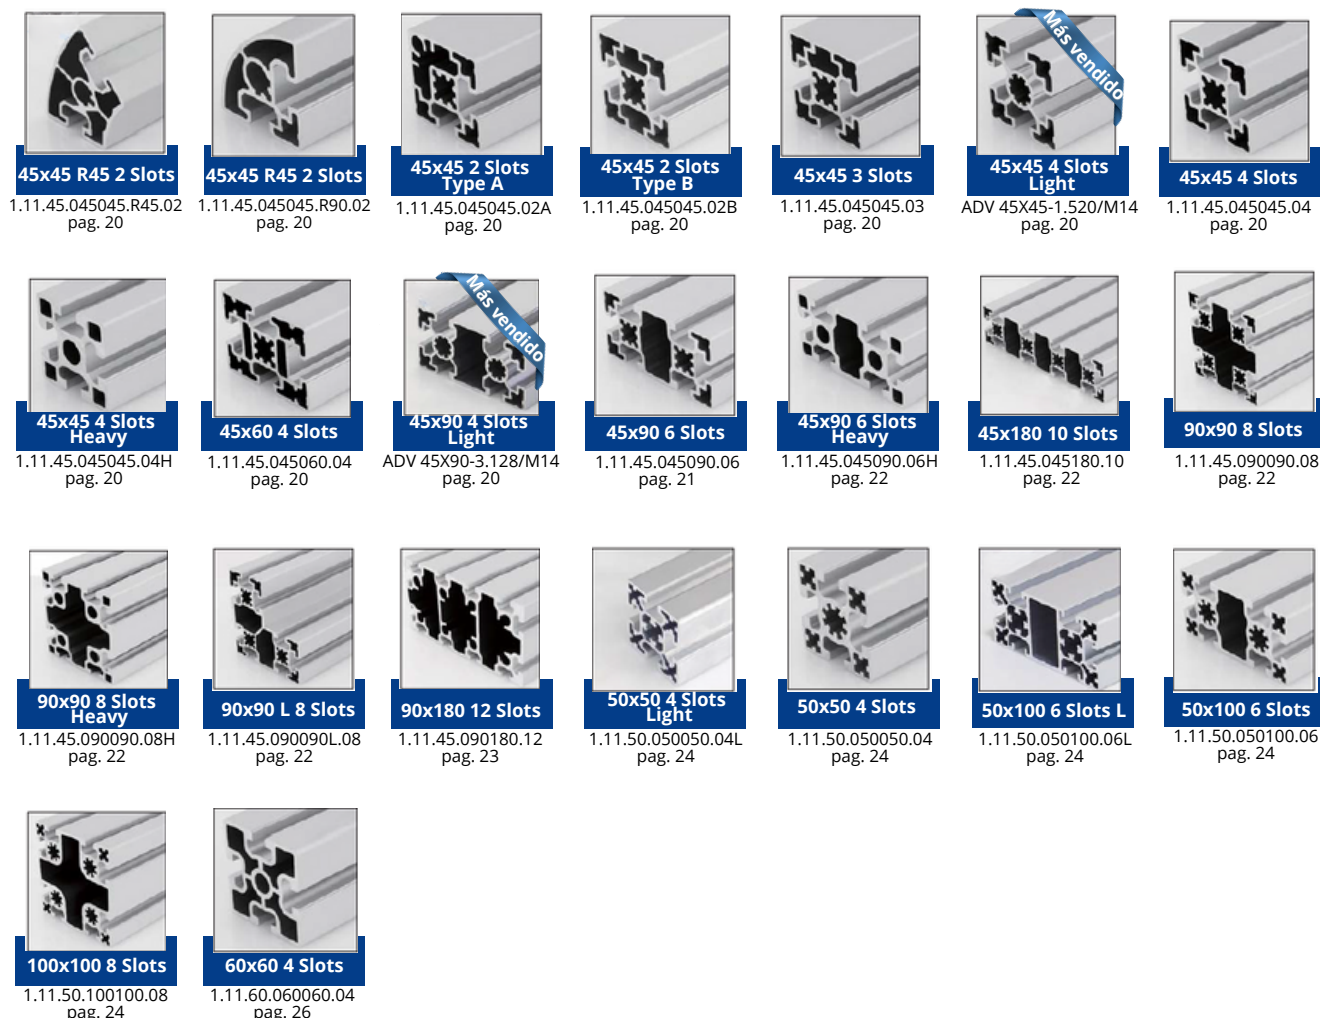

TORNILLERÍA Y HERRAJE



Pre-set Nut

2.11.06.M4
pag. 28



Square Nut

2.12.08.M4
pag. 30



T Nut

2.21.06.M4
pag. 32



Subsequent Nut

2.31.08.M4
pag. 34



**Anti-torsion
Subsequent Nut**

2.32.08.M6
pag. 36



T Bolt

2.41.08.16
pag. 38



**Hole Reducer
Bolt**

2.51.10.06
pag. 40

ELEMENTOS DE UNIÓN



Anchor Connector

3.11.30.01
pag. 44



Die Cast Bracket

3.21.20.2020
pag. 49



**Angle Profile
Bracket**

3.31.35.20.40
pag. 55



Inner Bracket

3.41.06A
pag. 68



Linear Bar

3.51.06
pag. 70



Joining Plate

3.52.08
pag. 72



Butt Connector

3.61.08
pag. 79




End Connector

3.71.30
pag. 81



Screw Connector


3.81.06
pag. 83



Cubic Connector

3.91.4545.02
pag. 85

ACCESORIOS DE PERFIL



End Cap

4.11.15.1515
pag. 89



T slot cover

4.21.06.BK
pag. 94

ELEMENTOS DE PISO



Base Plate

5.11.4080
pag. 97



Base Plate

5.12.40ST
pag. 100



Leveling Foot

5.21.60.12.90
pag. 102



Mounting Plate

5.31.40.4040
pag. 114




Mounting Plate

5.32.40.4040
pag. 116



Mounting Plate

5.33.40.4040
pag. 119



Castor Plate

5.34.30.STA
pag.123



Castor

5.41.63.M12
pag. 129



Base Angle

5.51.L
pag. 132



L Base

5.52.10
pag. 134



Foot and Castor

5.61.L
pag. 136



Leveling Castor

5.62.60F
pag. 138

ELEMENTOS PARA INSTALACIÓN DE PÁNELES



T Slot Reducing Profile

6.11.06
pag. 141




Panel Installation Block

6.21.06
pag. 143



Panel Mounting Strip

6.31.08.02
pag. 146



Mounting Block

6.41.08.01
pag. 148

ELEMENTOS PARA PUERTAS Y VENTAS



Handle

7.11.90.06.BE
pag. 151




Guard Wing Handle

7.12.95.08.BE
pag. 153



Aluminum Handle

7.13.P.GY
pag. 155



Hinge

7.21.30.30
pag. 157



Hinge

7.23.20.20
pag. 159




Hinge

7.24.30.30.30
pag. 163



Hinge

7.27.30.30
pag. 166



Hinge

7.28.30.30
pag. 168



Lock

7.31
pag. 170



Magnet Catch

7.41.14
pag. 174



Door Lock

7.42.30.3040
pag. 177



Sliding Door Profile

7.51.08
pag. 179

ACCESORIOS ADICIONALES



Suspender Glinder

8.11.08
pag. 182



Swivel Angle Plate

8.21.30
pag. 184



Potential Equaliser Nut

8.22.08.M4
pag. 186



Joint

8.31.4040A
pag. 188



Frame Joint

8.41.4040
pag. 194



Mounting Adaptor for Roller

8.51.01A
pag. 196



Telescope Unit

8.61.40.3030.01.ST
pag. 198

TIPOS DE PERFORACIÓN

Dowel Bore
pag. 201

Inner Connector Bore
pag. 202








Screw Thread Bore
pag. 203

Cross Bore
pag. 204

Angle Cut T
pag. 205

SLOT CHART

TABLA DE RANURAS

T Slot Symbol Símbolo de ranura	Cross Section Sección cruzada	Core Hole Agujero de centro	Slot Width Ancho de ranura	Slot Depth Profundidad de ranura	Wall Thickness Ancho de Paredes	Profile Group Grupo de perfil
		5.0	6.2	6.0	2.0	PG15 PG20
		10.0	8.2	8.0	2.2	PG30
		12.0	10.2	11.0	4.0	PG40
		12.0	10.2	13.0	6.0	PG45 PG50 PG55



Advanced
Sistema Modular






PERFIL DE ALUMINIO ESTRUCTURADO

- ✓ Cortos tiempos de
diseño y ejecución
- ✓ Materiales
reutilizables
- ✓ Disponibilidad
- ✓ Flexibilidad
y adaptación

PERFIL DE ALUMINIO PG15 - PG20


Strut Profile

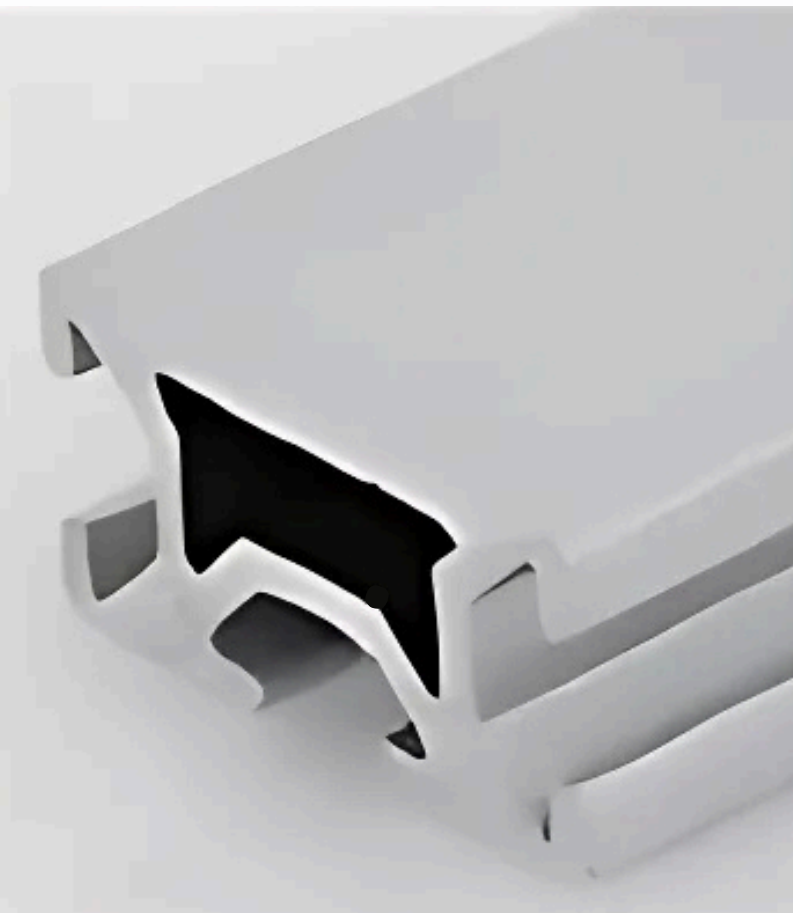

Material: 6063-T6

Surface: Anodized 11μM

Color: Silver / Plateado




Effective length: 5800mm

Cut section not anodized.

Perfil estructural PG15 -PG20 con T-slot de 6mm están diseñados para construir instalaciones de poco peso.

Strut Profile PG15 and PG20 featuring 6mm T-slot are designed for constructing light weight assemblies.


T Slot Symbol Símbolo de ranura	Cross Section Sección cruzada	Core Hole Agujero de centro	Slot Width Ancho de ranura	Slot Depth Profundidad de ranura	Wall Thickness Ancho de Paredes	Profile Group Grupo de perfil
		5.0	6.2	6.0	2.0	PG15 PG20

PG15-PG20

PG30

PG40


PG45- PG50
PG60



Elementos de Conexión Compatibles



[linear bar]







20x80 10 slots



40x40 8 slots



Description	Moment of Inertia $I_x(\text{cm}^4)$	Moment of Inertia $I_y(\text{cm}^4)$	Moment of Resistance $W_x(\text{cm}^3)$	Moment of Resistance $W_y(\text{cm}^3)$	Mass (Kg/m)	Part No.
Strut Profile PG20 20x20 R90 2 slots	0.6	0.6	0.5	0.5	0.45	1.11.20.020020.R90.02
ALUMINUM PROFILE 20MM X 20MM, 0.490/M06 A.PLATED	0.8	0.8	0.8	0.8	0.5	ADV 20X20-0.490/M6
ALUMINUM PROFILE 20MM X 40MM, 0.881/M06 A.PLATED	1.4	5.1	1.4	2.5	0.9	ADV 20X40-0.881/M6
Strut Profile PG20 20x60 8 slots	2	15.8	2	5.3	1.3	1.11.20.020060.08
Strut Profile PG20 20x80 10 slots	2.6	35.9	2.6	9	1.7	1.11.20.020080.10
Strut Profile PG20 40x40 8 slots	8.9	8.9	4.5	4.5	1.3	1.11.20.040040.08




Elementos de Conexión Compatibles



[Angle Profile]



[Inner bracket]



[linear bar]



[Die-cast]

PERFIL DE ALUMINIO PG30


Strut Profile



Material: 6063-T6

Surface: Anodized 11μM

Color: Silver / Plateado




Effective length: 5800mm

Cut section not anodized.

Perfil estructural PG30 con T-slot de 8.2mm está diseñado para construcciones de mediano peso (Marcos de maquinaria, rieles, estaciones de trabajo, paneles separadores, etc.)

Strut profile PG30, with 8.2mm T-slot, is designed for medium weight structures such as machine frame, trolley, workstation, exhibition frames, and partition frames.

T Slot Symbol Símbolo de ranura	Cross Section Sección cruzada	Core Hole Agujero de centro	Slot Width Ancho de ranura	Slot Depth Profundidad de ranura	Wall Thickness Ancho de Paredes	Profile Group Grupo de perfil
		10.0	8.2	8.0	2.2	PG30

PG15-PG20


PG30

PG40


PG45- PG50
PG60




15x90 7 slots




30x30 R45 2 slots

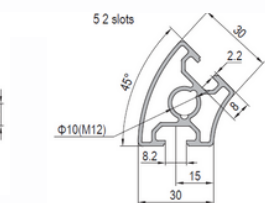


30x30 R90 2 slots




30x30 2 slots Type A




30x30 2 slots Type B

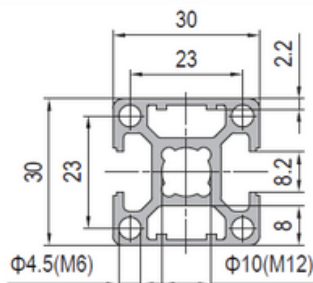


30x30 3 slots




30x30 4 slots Light




30x30 4 slots






30x60 6 slots






30x90 8 slots

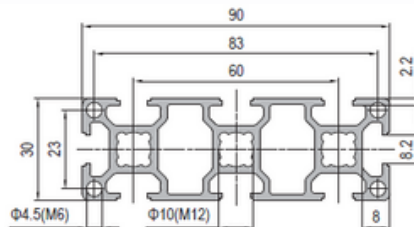

Description	Moment of Inertia Ix(cm ⁴)	Moment of Inertia Iy(cm ⁴)	Moment of Resistance Wx(cm ³)	Moment of Resistance Wy(cm ³)	Mass (Kg/m)	Part No.
Strut Profile PG30 15x90 7 slots	1.4	40.4	1.9	9	1.5	1.11.30.015090.07
Strut Profile PG30 30x30 R45 2 slots	4.2	3.1	2.4	1.7	0.8	1.11.30.030030.R45.02
Strut Profile PG30 30x30 R90 2 slots	2.0	2.0	1.5	1.5	0.8	1.11.30.030030.R90.02
Strut Profile PG30 30x30 2 slots Type A	2.9	2.9	2	2	0.9	1.11.30.030030.02A
Strut Profile PG30 30x30 2 slots Type B	2.8	3.2	1.9	2.1	0.9	1.11.30.030030.02B
Strut Profile PG30 30x30 3 slots	3	2.9	2	1.9	0.9	1.11.30.030030.03
ALUMINUM PROFILE 30MM X 30MM 0.667/M12 A.PLATED	2.6	2.6	1.8	1.8	0.8	ADV 30x30-0.667/M12
Strut Profile PG30 30x30 4 slots	2.9	2.9	2	2	0.9	1.11.30.030030.04
ALUMINUM PROFILE 30MM X 60MM, 1.523/M12 A.PLATED	5.3	19.9	3.5	6.7	1.6	ADV 30X60-1.523/M12
Strut Profile PG30 30x90 8 slots	7.7	62	5.1	13.8	2.2	1.11.30.030090.08

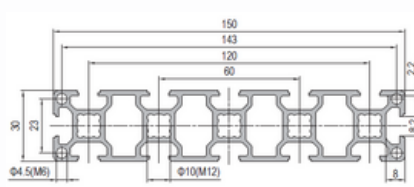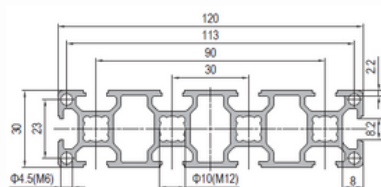

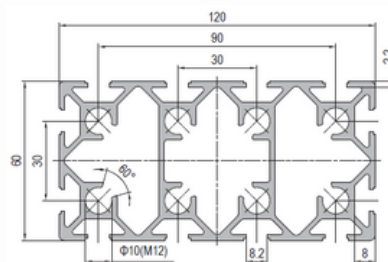


Description	Moment of Inertia Ix(cm ⁴)	Moment of Inertia Iy(cm ⁴)	Moment of Resistance Wx(cm ³)	Moment of Resistance Wy(cm ³)	Mass (Kg/m)	Part No.
Strut Profile PG30 30x120 10 slots	10.1	139.9	6.7	23.3	2.9	1.11.30.030120.10
Strut Profile PG30 30x150 12 slots	12.5	264.4	8.3	36.3	3.4	1.11.30.030150.12
Strut Profile PG30 60x60 8 slots	35.3	35.3	11.8	11.8	2.5	1.11.30.060060.08
Strut Profile PG30 60x60 L 8 slots	26.4	26.4	10.4	10.4	2.3	1.11.30.060060L.08
Strut Profile PG30 60x120 12 slots	74.7	252.6	24.9	42.1	4.8	1.11.30.060120.12

[anchor connector]



[inner bracket]



[linear bar]



[Die-cast]



[screw connector]




[Angle Profile]

PERFIL DE ALUMINIO PG40

Strut Profile



Material: 6063-T6
Surface: Anodized 11μM
Color: Silver / Plateado



Effective length: 5800mm
Cut section not anodized.

Perfil estructural PG40 con T-slot de 10.2mm está diseñado para construcciones de mediano y gran peso (Marcos de maquinaria, rieles, estaciones de trabajo, paneles separadores, etc.)

Strut profile PG40, with 10.2mm T-slot, is designed for medium weight structures and heavy loading structures, such as machine frame, workstation, partition, exhibition frames, and machine enclosure, etc.

T Slot Symbol Símbolo de ranura	Cross Section Sección cruzada	Core Hole Agujero de centro	Slot Width Ancho de ranura	Slot Depth Profundidad de ranura	Wall Thickness Ancho de Paredes	Profile Group Grupo de perfil
		12.0	10.2	11.0	4.0	PG40

PG15-PG20

PG30

PG40

PG45- PG50
PG60



40x40 R45 2 slots







40x40 R90 2 slots



40x40 T45 2 slots



40x40 1 slots

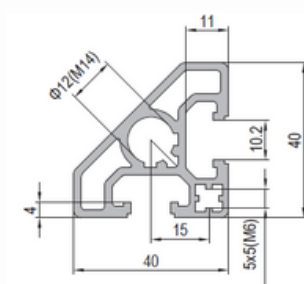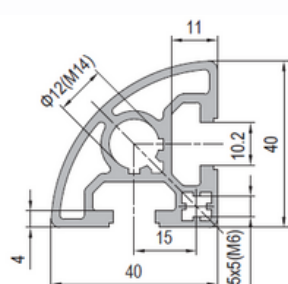

40x40 2 slots Type A







40x40 2 slots Type B




40x40 3 slots



40x40 4 slots
Super Light

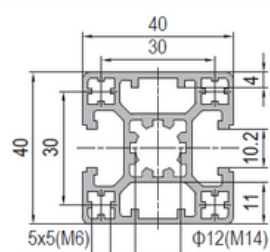








Description	Moment of Inertia $I_x(\text{cm}^4)$	Moment of Inertia $I_y(\text{cm}^4)$	Moment of Resistance $W_x(\text{cm}^3)$	Moment of Resistance $W_y(\text{cm}^3)$	Mass (Kg/m)	Part No.
Strut Profile PG40 40x40 R45 slots	13.6	10.4	5.9	4.2	1.7	1.11.40.040040.R45.02
Strut Profile PG40 40x40 R90 2 slots	6.5	6.5	3.7	3.7	1.3	1.11.40.040040.R90.02
Strut Profile PG40 40x40 T45 2 slots	6.5	6.5	3.25	3.25	1.21	1.11.40.040040.T45.02
Strut Profile PG40 40x40 1 slot	10.4	10.1	5.2	5	1.68	1.11.40.040040.01
Strut Profile PG40 40x40 2 slots Type A	9.6	9.6	4.5	4.5	1.5	1.11.40.040040.02A
Strut Profile PG40 40x40 2 slots Type B	9.6	8.6	4.8	4.3	1.5	1.11.40.040040.02B
Strut Profile PG40 40x40 3 slots	9.1	8.6	4.5	4.3	1.5	1.11.40.040040.03
Strut Profile PG40 40x40 4 slots Super Light	7.3	7.3	3.6	3.6	1.3	1.11.40.040040.04SL
Aluminum Profile 40mm X 40mm 1.40/M14 A. Plated	8.6	8.6	4.3	4.3	1.5	ADV 40X40-1.406/M14



Description	Moment of Inertia $I_x(\text{cm}^4)$	Moment of Inertia $I_y(\text{cm}^4)$	Moment of Resistance $W_x(\text{cm}^3)$	Moment of Resistance $W_y(\text{cm}^3)$	Mass (Kg/m)	Part No.
Strut Profile PG40 40x40 4 slots	9.1	9.1	4.6	4.6	1.6	1.11.40.040040.04
Strut Profile PG40 40x40 4 slots Heavy	11.5	11.5	5.8	5.8	2	1.11.40.040040.04H
Strut Profile PG40 40x60 4 slots	13.3	27.6	6.6	9.2	2.3	1.11.40.040060.04
Strut Profile PG40 40x80 6 slot Super Light	14.3	52	7.2	13	2.3	1.11.40.040080.06SL
ALUMINUM PROFILE 40MM X 80MM, 2.465/M14 A.PLATED	15.8	59.1	7.9	14.8	2.5	ADV 40X80-2.465/M14
Strut Profile PG40 40x80 6 slots	16.6	63.2	8.3	15.8	2.7	1.11.40.040080.06
Strut Profile PG40 40x80 6 slots Heavy	22.2	80.8	11.1	20.2	3.6	1.11.40.040080.06H

Más
vendido

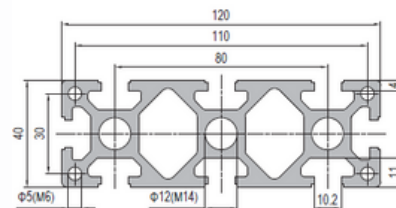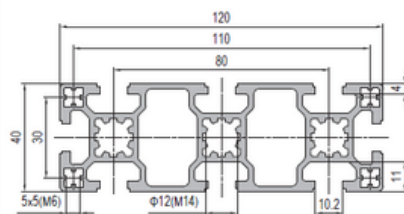

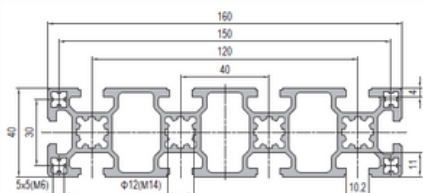

Description	Moment of Inertia $I_x(\text{cm}^4)$	Moment of Inertia $I_y(\text{cm}^4)$	Moment of Resistance $W_x(\text{cm}^3)$	Moment of Resistance $W_y(\text{cm}^3)$	Mass (Kg/m)	Part No.
Strut Profile PG40 40x120 8 slots	24.1	194.8	12.1	32.5	3.8	1.11.40.040120.08
Strut Profile PG40 40x120 8 slots Heavy	33	255.3	16.5	42.6	5.2	1.11.40.040120.08H
Strut Profile PG40 40x160 10 slots	31.6	435.7	15.8	54.5	4.8	1.11.40.040160.10
Strut Profile PG40 40x160 10 slots Heavy	43.7	582.2	21.8	72.8	6.8	1.11.40.040160.10H
Strut Profile PG40 80x80 8 slots	109.9	109.9	27.5	27.5	4.2	1.11.40.080080.08









80x80 8 slots Heavy




80x80 R90 6 slots



80x80 L 8 slots

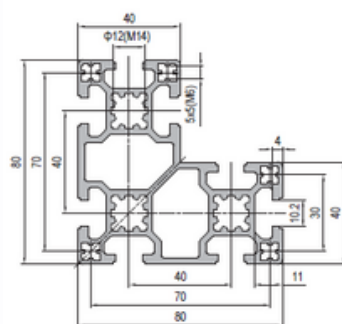




80x120 10 slots

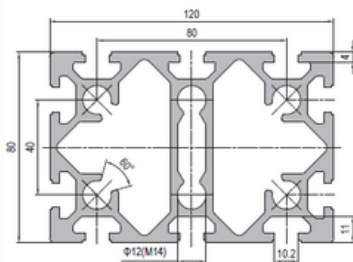

Description	Moment of Inertia $I_x(\text{cm}^4)$	Moment of Inertia $I_y(\text{cm}^4)$	Moment of Resistance $W_x(\text{cm}^3)$	Moment of Resistance $W_y(\text{cm}^3)$	Mass (Kg/m)	Part No.
Strut Profile PG40 80x80 8 slots Heavy	148.2	148.2	37.1	37.1	5.7	1.11.40.080080.08H
Strut Profile PG40 80x80 R90 6 slots	73	73	20	20	3.4	1.11.40.080080.R90.06
Strut Profile PG40 80x80 L 8 slots	83.9	83.9	24.7	24.7	4	1.11.40.080080L.08
Strut Profile PG40 80x120 10 slots	222.1	449.2	55.5	74.8	8.3	1.11.40.080120.10


Más vendido

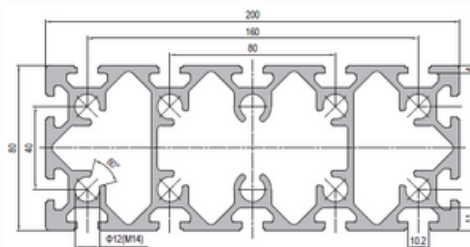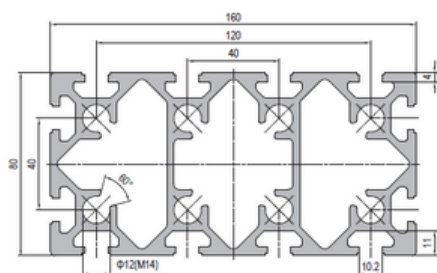

Description	Moment of Inertia $I_x(\text{cm}^4)$	Moment of Inertia $I_y(\text{cm}^4)$	Moment of Resistance $W_x(\text{cm}^3)$	Moment of Resistance $W_y(\text{cm}^3)$	Mass (Kg/m)	Part No.
Strut Profile PG40 80x160 12 slots	287.5	975.5	71.9	121.9	10.4	1.11.40.080160.12
Strut Profile PG40 80x200 14 slots	353.1	1789.8	88.3	179	12.3	1.11.40.080200.14
Strut Profile PG40 120x120 12 slots	659.1	659.1	109.9	109.9	11.5	1.11.40.120120.12




Elementos de Conexión Compatibles


			
[anchor connector]	[inner bracket]	[linear bar]	[Die-cast]
			
[screw connector]		[Angle Profile]	

PERFIL DE ALUMINIO PG45-PG50-PG60

Strut Profile

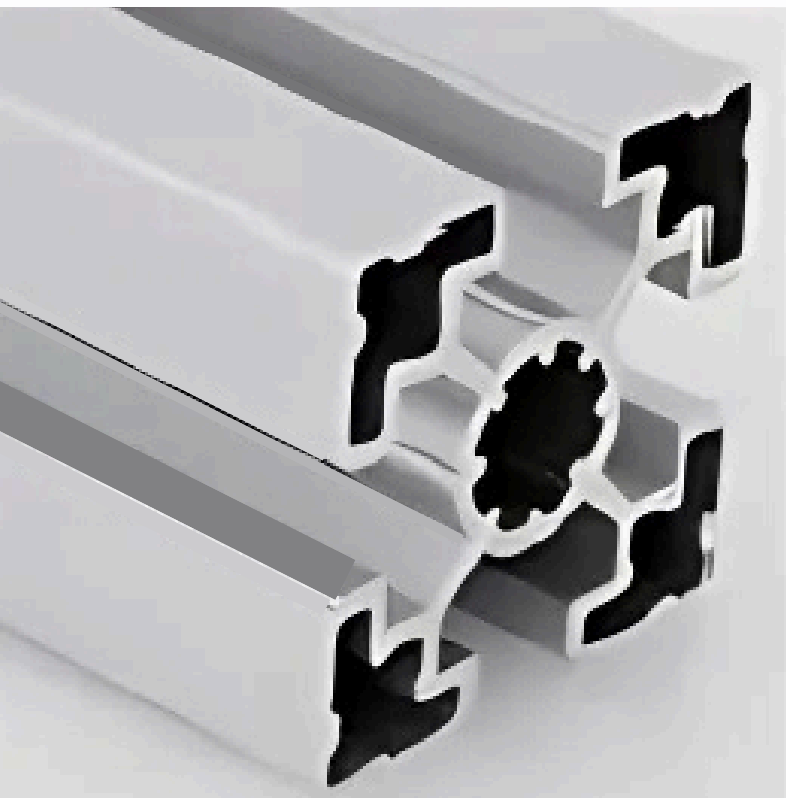



Material: 6063-T6
Surface: Anodized 11μM
Color: Silver / Plateado



Effective length: 5800mm
Cut section not anodized.

Perfil estructural PG45-50-60 con T-slot de 10.2mm está diseñado para construcciones de gran peso (Marcos de maquinaria, paredes separadoras, etc.)

Strut profile PG45-50-60, with 10.2mm T-slot, is designed for medium weight structures and heavy loading structures, such as machine frame, factory partition, etc.

T Slot Symbol Símbolo de ranura	Cross Section Sección cruzada	Core Hole Agujero de centro	Slot Width Ancho de ranura	Slot Depth Profundidad de ranura	Wall Thickness Ancho de Paredes	Profile Group Grupo de perfil
		12.0	10.2	13.0	6.0	PG45 PG50 PG55

PG15-PG20

PG30

PG40

PG45- PG50
PG60

PG45x45



45x45 R45 2 slots







45x45 R90 2 slots



45x45 2 slots Type A



45x45 2 slots Type B



45x45 3 slots







45x45 4 slots Light



45x45 4 slots



45x45 4 slots Heavy

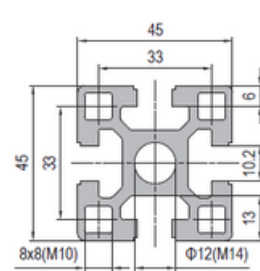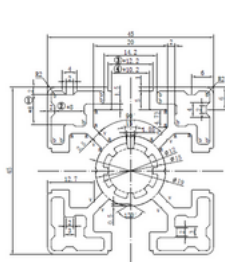

Description	Moment of Inertia $I_x(\text{cm}^4)$	Moment of Inertia $I_y(\text{cm}^4)$	Moment of Resistance $W_x(\text{cm}^3)$	Moment of Resistance $W_y(\text{cm}^3)$	Mass (Kg/m)	Part No.
Strut Profile PG45 45x45 R45 2 slots	20.1	15.3	7.9	5.5	2	1.11.45.045045.R45.02
Strut Profile PG45 45x45 R90 2 slots	8.4	8.4	4.3	4.3	1.5	1.11.45.045045.R90.02
Strut Profile PG45 45x45 2 slots Type A	12.9	12.9	5.7	5.7	1.9	1.11.45.045045.02A
Strut Profile PG45 45x45 2 slots Type B	13.7	12.1	6.1	5.4	1.9	1.11.45.045045.02B
Strut Profile PG45 45x45 3 slots	12.9	12.1	5.7	5.4	1.8	1.11.45.045045.03
ALUMINUM PROFILE 45MM X 45MM 1.520/M14 A.Plated	10.5	10.5	4.7	4.7	1.6	ADV 45X45-1.520/M14
Strut Profile PG45 45x45 4 slots	12.1	12.1	5.4	5.4	1.8	1.11.45.045045.04
Strut Profile PG45 45x45 4 slots Heavy	16.5	16.5	7.4	7.4	2.4	1.11.45.045045.04H






45x60 4 slots





45x90 6 slots light






45x90 6 slots

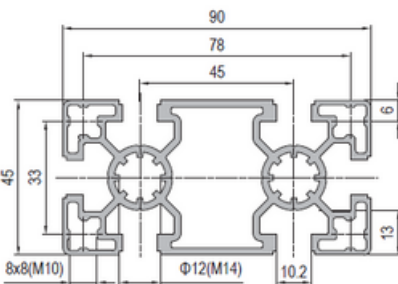


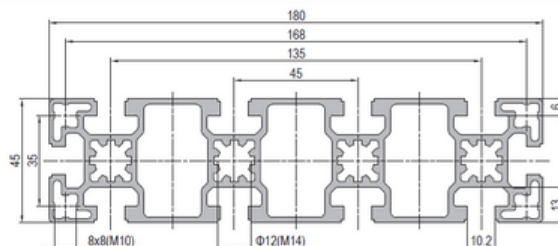

Description	Moment of Inertia $I_x(\text{cm}^4)$	Moment of Inertia $I_y(\text{cm}^4)$	Moment of Resistance $W_x(\text{cm}^3)$	Moment of Resistance $W_y(\text{cm}^3)$	Mass (Kg/m)	Part No.
Strut Profile PG45 45x60 4 slots	16.2	27.8	7.2	9.3	2.4	1.11.45.045060.04
Strut Profile PG45 45x90 6 slots Light	21.6	80	9.6	17.7	2.85	1.11.45.045090.06L
ALUMINUM PROFILE 45MM X 90MM, 3.128/M14 A.PLATED	24.1	89.3	10.8	19.9	3.2	ADV 45X90-3.128/M14
Strut Profile PG45 45x90 6 slots Heavy	32.5	122.2	14.5	27.2	4.4	1.11.45.045090.06H
Strut Profile PG45 45x180 10 slots	48.4	640.6	21.5	71.2	5.8	1.11.45.045180.10


Más
vendido



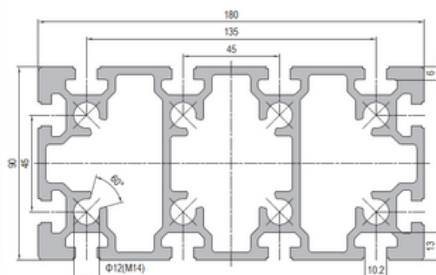

Description	Moment of Inertia $I_x(\text{cm}^4)$	Moment of Inertia $I_y(\text{cm}^4)$	Moment of Resistance $W_x(\text{cm}^3)$	Moment of Resistance $W_y(\text{cm}^3)$	Mass (Kg/m)	Part No.
Strut Profile PG45 90x90 8 slots	163.2	163.2	36.3	36.3	5	1.11.45.090090.08
Strut Profile PG45 90x90 8 slots Light	222.9	222.9	49.6	49.6	6.8	1.11.45.090090.08H
Strut Profile PG45 90x90 L 8 slots	121.5	121.5	32	32	4.6	1.11.45.090090L.08
Strut Profile PG45 90x180 12 slots	454.9	1585.7	101.1	176.2	12.7	1.11.45.090180.12

Elementos de Conexión Compatibles

 [anchor connector]	 [inner bracket]	 [linear bar]	 [Die-cast]
	 [screw connector]	 [Angle Profile]	

PG50x50






50x50 4 slots Light



50x50 4 slots





50x100 6 slots

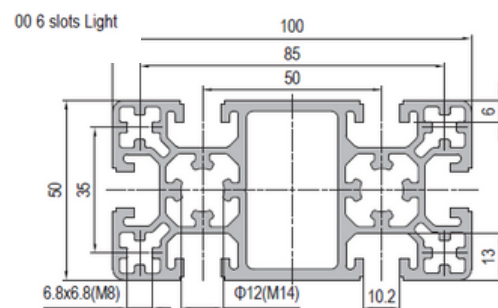

50x100 6 slots




100x100 8 slots

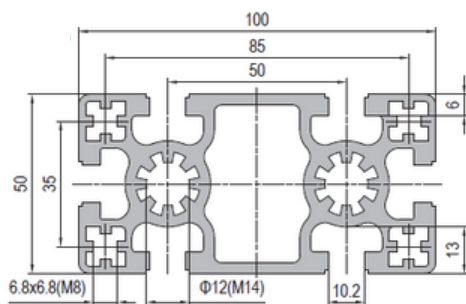


Description	Moment of Inertia $I_x(\text{cm}^4)$	Moment of Inertia $I_y(\text{cm}^4)$	Moment of Resistance $W_x(\text{cm}^4)$	Moment of Resistance $W_y(\text{cm}^4)$	Mass (Kg/m)	Part No.
Strut Profile PG50 50x50 4 slots Light	20.19	20.19	8.16	8.16	2.35	1.11.50.050050.04L
Strut Profile PG50 50x50 4 slots	25	25	10	10	3	1.11.50.050050.04
Strut Profile PG50 50x100 6 slots Light	41.3	156.7	16.5	31.3	4.2	1.11.50.050100.06L
Strut Profile PG50 50x100 6 slots	56.2	184.4	18.5	36.9	5	1.11.50.050100.06
Strut Profile PG50 100x100 8 slots	331.1	331.1	66.2	66.2	8.5	1.11.50.100100.08

Elementos de Conexión Compatibles

 [anchor connector]	 [inner bracket]	 [linear bar]	 [Die-cast]
 [screw connector]		 [Angle Profile]	

PG60x60



Description	Moment of Inertia $I_x(\text{cm}^4)$	Moment of Inertia $I_y(\text{cm}^4)$	Moment of Resistance $W_x(\text{cm}^3)$	Moment of Resistance $W_y(\text{cm}^3)$	Mass (Kg/m)	Part No.
Strut Profile PG60 60x60 4 slots	47.7	47.7	15.9	15.9	3.8	1.11.60.060060.04

Elementos de Conexión Compatibles



[screw connector]



[Angle Profile]

TORNILLERÍA Y HERRAJE



Pre-set Nut

Square Nut





T-Nut

Subsequent Nut

Anti-torsion Subsequent Nut

T-Bolt

Hole Reducer Bolt



Pre-set Nut


Tornillería y Herraje



Material: Pre-set Nut-nickel plated steel
Pre-set Nut Sleeve- EVA

La tuerca plana es colocada en la ranura desde el final del perfil. Con poca eficiencia de ensamble, pero buena conexión y asegurando estabilidad. La cejilla evita que se deslice durante el ensamble y puede arreglarse desde cualquier posición requerida, en especial verticalmente.

Pre-set Nut can be only put into T slot from profile end, with low assembly efficiency, but with good connection and stability. The sleeve is to avoid any sliding when using the pre-set nut for assembly and can be fixed at any required position, especially in vertical position.

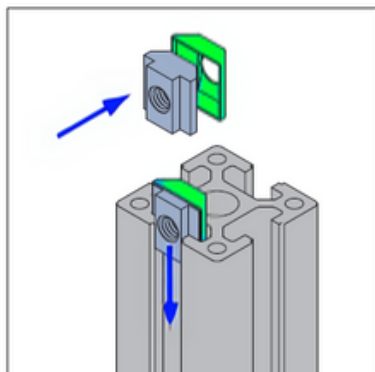

Confiabilidad




Eficiencia




Económico








Pre-set Nut-6-M4
Pre-set Nut-6-M5




Description	D	Mass (g/pcs)	Part No.
Pre-set Nut-6-M4	M4	3	2.11.06.M4
Pre-set Nut-6-M5	M5	3	2.11.06.M5





Pre-set Nut-8-M4
Pre-set Nut-8-M5
Pre-set Nut-8-M6
Pre-set Nut Sleeve-8

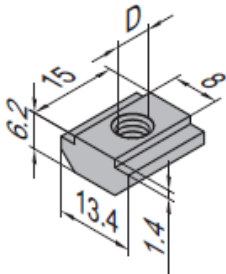

Description	D	Mass (g/pcs)	Part No.
Pre-set Nut-8-M4	M4	8	2.11.08.M4
Pre-set Nut-8-M5	M5	8	2.11.08.M5
Pre-set Nut-8-M6	M6	7	2.11.08.M6
Pre-set Nut Sleeve-8		0.3	2.11.08.01




Pre-set Nut-10-M4
Pre-set Nut-10-M5
Pre-set Nut-10-M6
Pre-set Nut-10-M8
Pre-set Nut Sleeve-10

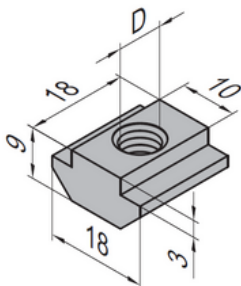

Description	D	Mass (g/pcs)	Part No.
Pre-set Nut-10-M4	M4	16	2.11.10.M4
Pre-set Nut-10-M5	M5	16	2.11.10.M5
Pre-set Nut-10-M6	M6	15	2.11.10.M6
Pre-set Nut-10-M8	M8	14	2.11.10.M8
Pre-set Nut Sleeve-10		0.4	2.11.10.01

Square Nut


Tornillería y Herraje

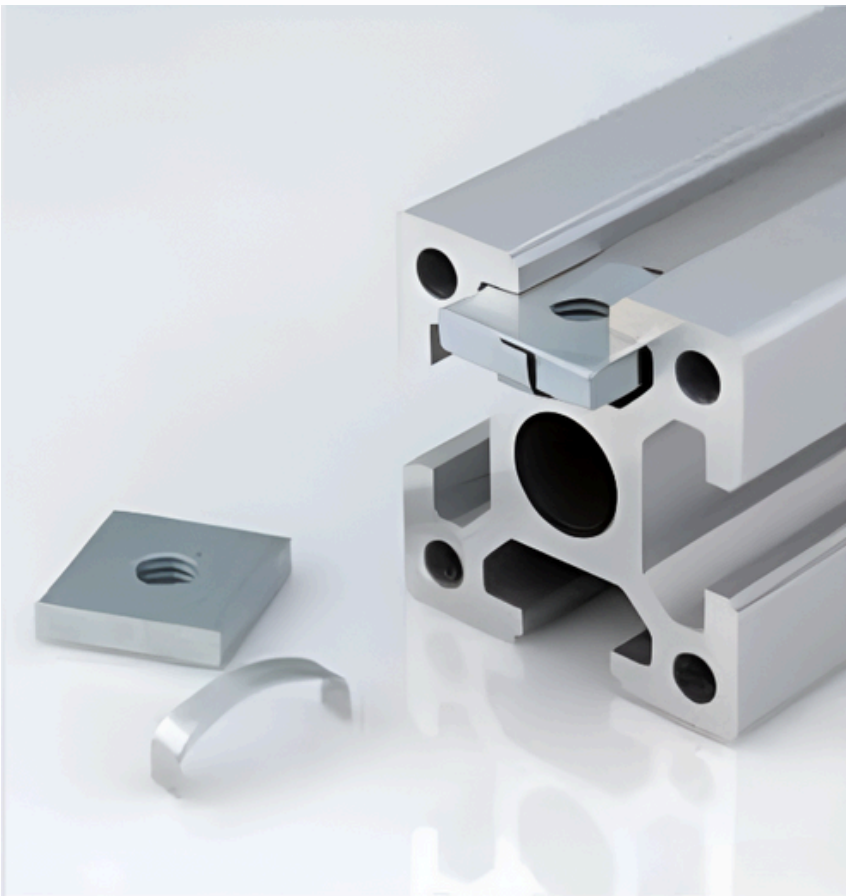

Material: Zinc plated steel

El clip incluido evita que se deslice al usar la tuerca cuadrada (Square Nut) para ensambles, y puede arreglarse y modificarse desde cualquier posición, en especial verticalmente

This clip is to avoid any sliding when using the square nut for assembly and can be fixed at any required position, especially at vertical position



Confiabilidad




Eficiencia




Económico







Square Nut-8-M4
Square Nut-8-M5
Square Nut-8-M6
Square Nut Clip-8

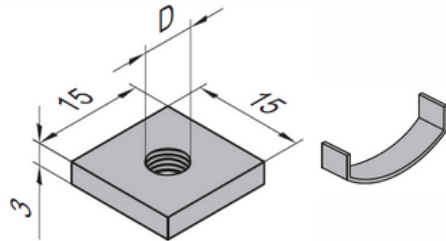

Description	D	Mass (g/pcs)	Part No.
Square Nut-8-M4	M4	5	2.12.08.M4
Square Nut-8-M5	M5	5	2.12.08.M5
Square Nut-8-M6	M6	5	2.12.08.M6
Square Nut Clip-8		0.4	2.12.08.01



Square Nut-10-M4
Square Nut-10-M5
Square Nut-10-M6
Square Nut-10-M8
Square Nut Clip-10

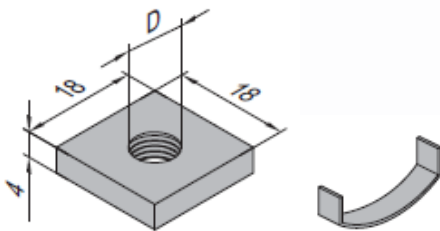


Description	D	Mass (g/pcs)	Part No.
Square Nut-10-M4	M4	10	2.12.10.M4
Square Nut-10-M5	M5	10	2.12.10.M5
Square Nut-10-M6	M6	9	2.12.10.M6
Square Nut-10-M8	M8	8	2.12.10.M8
Square Nut Clip-10		0.5	2.12.10.01



Material: Nickel plated steel

La tuerca T (o tuerca martillo) se inserta directamente en el punto de ensamble, haciendo el armado eficiente. Sin embargo la fuerza de conexión y estabilidad no es tan buena como las de la Tuerca plana.

T Nut can be inserted directly at the assembly point, which makes the assembly very efficient, however the connection strength and stability is not as good as the Pre-set Nut

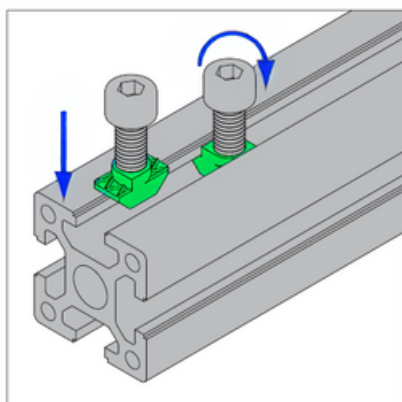

Confiabilidad




Eficiencia




Económico







T Nut-6-M4
T Nut-6-M5

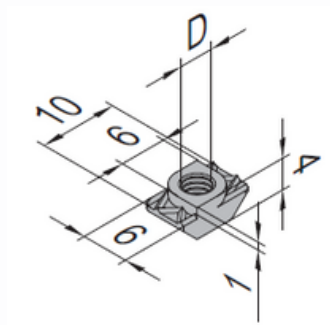


Description	D	Mass (g/pcs)	Part No.
T Nut-6-M4	M4	2	2.21.06.M4
T Nut-6-M5	M5	2	2.21.06.M5




T Nut-8-M4
T Nut-8-M5
T Nut-8-M6

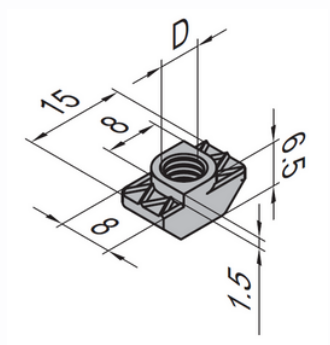

Description	D	Mass (g/pcs)	Part No.
T Nut-8-M4	M4	4	2.21.08.M4
T Nut-8-M5	M5	4	2.21.08.M5
T Nut-8-M6	M6	3	2.21.08.M6



T Nut-10-M4
T Nut-10-M5
T Nut-10-M6
T Nut-10-M8

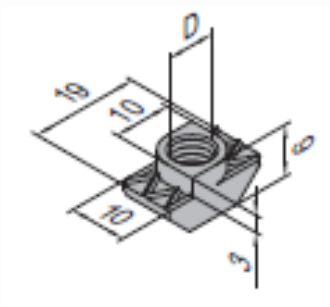

Description	D	Mass (g/pcs)	Part No.
T Nut-10-M4	M4	8	2.21.10.M4
T Nut-10-M5	M5	8	2.21.10.M5
T Nut-10-M6	M6	7	2.21.10.M6
T Nut-10-M8	M8	6	2.21.10.M8



Subsequent Nut


Tornillería y Herraje



Material: Zinc plated steel

La Tuerca de presión con cejilla se inserta directamente en el punto de ensamble. La cejilla ayuda al armado y el posicionamiento. La fuerza de conexión y estabilidad es la misma que la Tuerca T.

Subsequent Nut with a spring leaf can be inserted directly at the assembly point. The spring assists with assembly and positioning. The connecting strength and stability is same as T-Nut

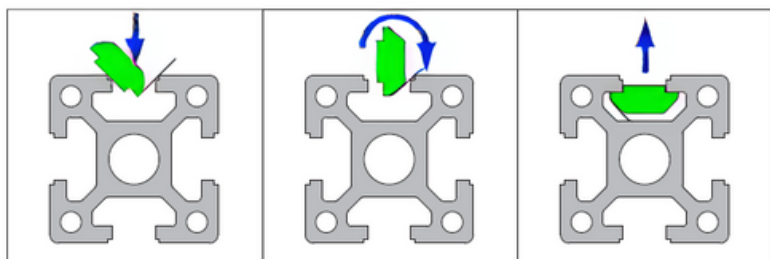

Confiabilidad




Eficiencia




Económico








Subsequent Nut-8-M4
Subsequent Nut-8-M5
Subsequent Nut-8-M6

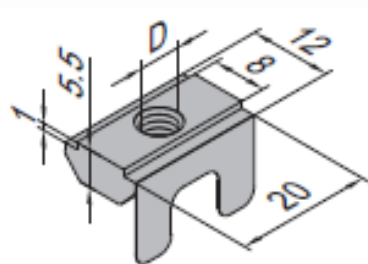

Description	D	Mass (g/pcs)	Part No.
Subsequent Nut-8-M4	M4	8	2.31.08.M4
Subsequent Nut-8-M5	M5	8	2.31.08.M5
Subsequent Nut-8-M6	M6	7	2.31.08.M6
Subsequent Nut-8-M8	M8	7	2.31.08.M8



Subsequent Nut-10-M4
Subsequent Nut-10-M5
Subsequent Nut-10-M6

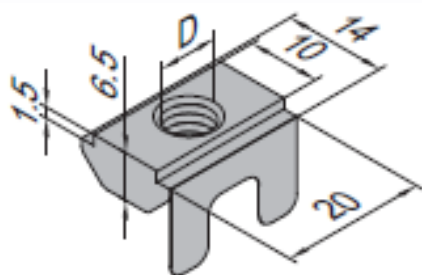

Description	D	Mass (g/pcs)	Part No.
Subsequent Nut-10-M4	M4	10	2.31.10.M4
Subsequent Nut-10-M5	M5	10	2.31.10.M5
Subsequent Nut-10-M6	M6	9	2.31.10.M6
Subsequent Nut-10-M8	M8	9	2.31.10.M8

Anti-torsion Subsequent-Nut


Tornillería y Herraje



Material: Nickel plated steel

Previene a los perfiles con Screw connectors de torsión.

Prevent profiles with screw connectors from torsion.

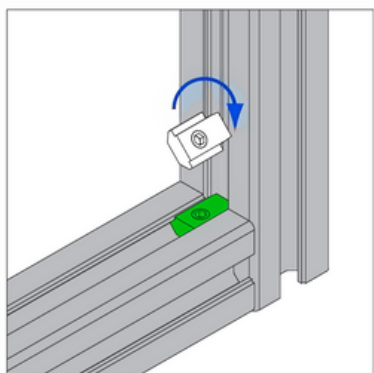

Confiabilidad




Eficiencia




Económico








Anti-torsion Subsequent Nut-8

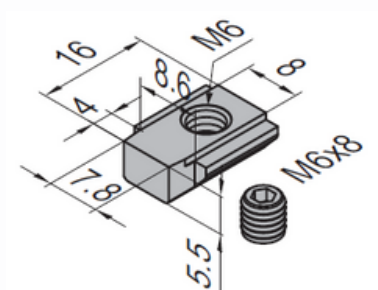


Description	Mass (g/pcs)	Part No.
Anti-torsion Subsequent Nut-8 (with top thread)	10	2.32.08.M6



Anti-torsion Subsequent Nut-10

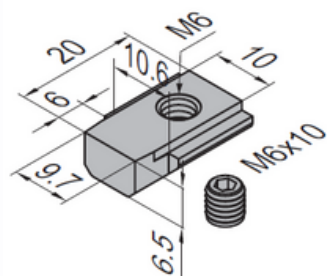


Description	Mass (g/pcs)	Part No.
Anti-torsion Subsequent Nut-10 (with top thread)	15	2.32.10.M6

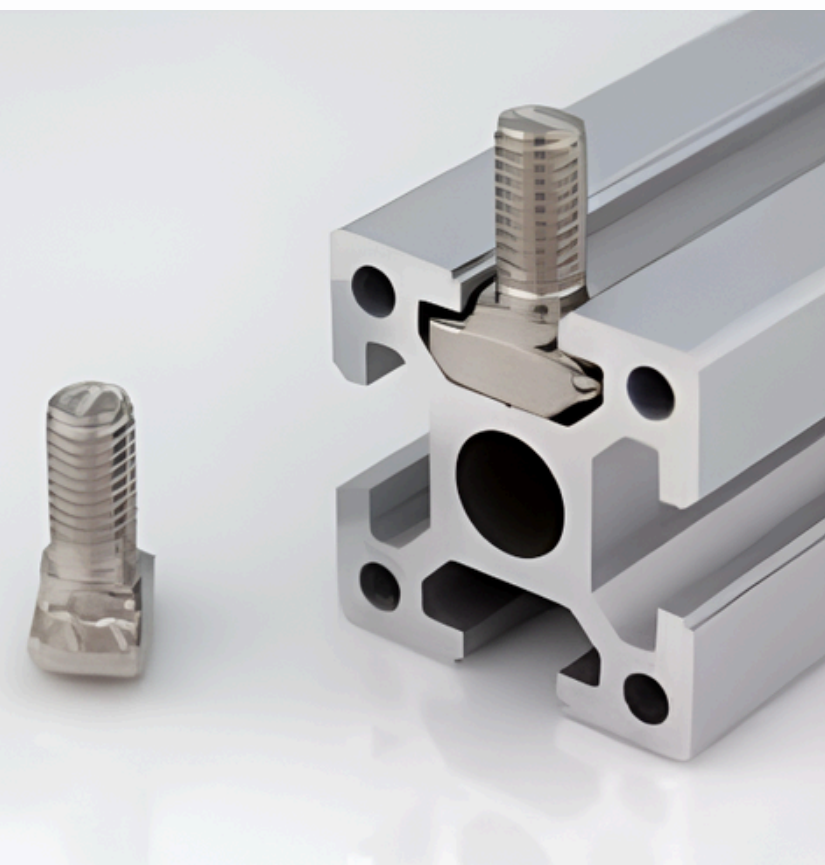


Material: Nickel plated steel


Similar a la tuerca T. El tornillo cabeza de martillo puede ser insertado directamente en el punto de ensamble con alta eficiencia. La fuerza de conexión y estabilidad es igual al de la tuerca T.

Similar to T nut. T bolt can be inserted directly at the assembly point with high assembly efficiency. The connection strength and stability are same as T nut.

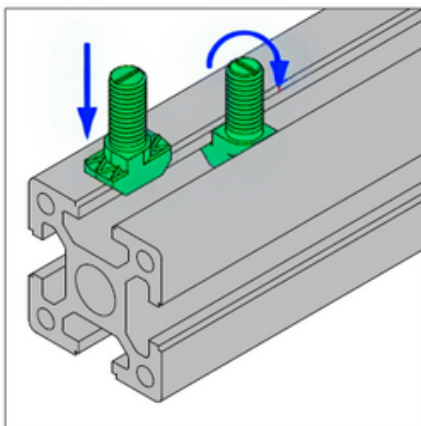





T Bolt-8-16
T Bolt-8-20
T Bolt-8-25

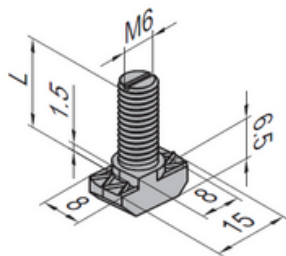


Description	L (mm)	Mass (g/pcs)	Part No.
T Bolt-8-16	16	7	2.41.08.16
T Bolt-8-20	20	8	2.41.08.20
T Bolt-8-25	25	9	2.41.08.25

Más vendido



T Bolt-10-20
T Bolt-10-25
T Bolt-10-30
T Bolt-10-35

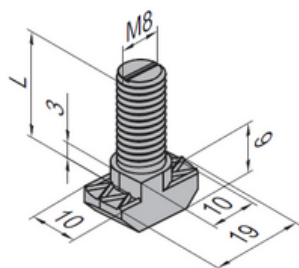

Description	L (mm)	Mass (g/pcs)	Part No.
T Bolt-10-20	20	13	2.41.10.20
T Bolt-10-25	25	15	2.41.10.25
T Bolt-10-30	30	17	2.41.10.30
T Bolt-10-35	35	19	2.41.10.35

Más vendido

Más vendido

Hole Reducer Bolt


Tornillería y Herraje



Material: Nickel plated steel

Reduce el diámetro del hueco del perfil para mejorar la fuerza de conexión

To reduce the hole diameter of the profile and improve the connection strength



Description	D	G	L (mm)	Mass (g/pcs)	Part No.
Hole Reducer Bolt-M10/M6	M10	M6	15	8	2.51.10.06
Hole Reducer Bolt-M12/M6	M12	M6	20	11	2.51.12.06
Hole Reducer Bolt-M14/M8	M14	M8	20	14	2.51.14.08
Hole Reducer Bolt-M14/M10	M14	M10	20	8	2.51.14.10
Hole Reducer Bolt-M16/M8	M16	M8	20	19	2.51.16.08

ELEMENTOS DE UNIÓN




Anchor Connector
Die Cast Bracket
Angle Profile Bracket
Inner Bracket
Linear Bar Bracket
Joining Plate
Butt Connector
End Connector
Screw Connector
Cubic Connector

COMPARATIVE CHART FOR SELECTION

TABLA COMPARATIVA PARA SELECCIÓN


- Recommended
- Suitable
- Unsuitable



	High feed force	●	●	●	●	●	●	●
	High moment	●	●	●	●	●	●	●
	High torsional moment	●	●	●	●	●	●	●
	Minimal finishing work	●	●	●	●	●	●	●
	Minimal assembly	●	●	●	●	●	●	●
	Low parts costs	●	●	●	●	●	●	●
	Subsequent mounting in closed frame	●	●	●	●	●	●	●
	Adjustment possible	●	●	●	●	●	●	●
	Internal connection (concealable)	●	●	●	●	●	●	●
	Angle Connection	●	●	●	●	●	●	●

Anchor Connector





Elementos de unión

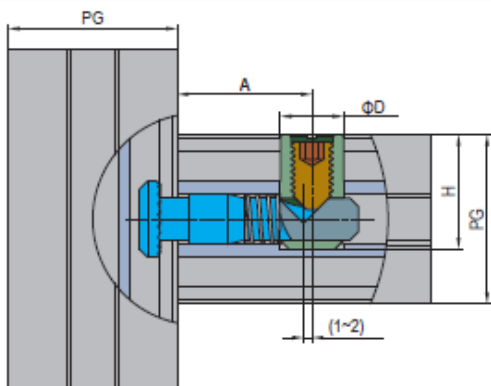




Material: Nickel plated steel

Previene a los perfiles con screw connectors de torsión. Añade alta fuerza y fácil ajuste. Solo una ranura es usada para la conexión.

Prevent profiles with screw connectors from torsion. It adds high strength and easily adjust. Only one slot it's used for connection






Universal

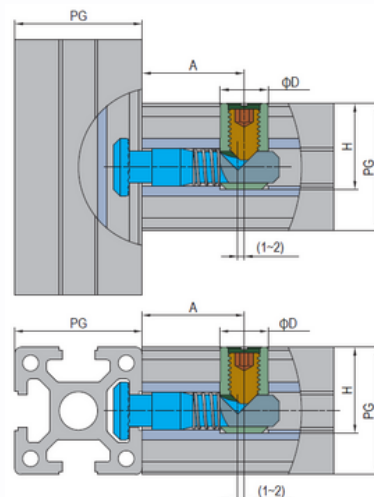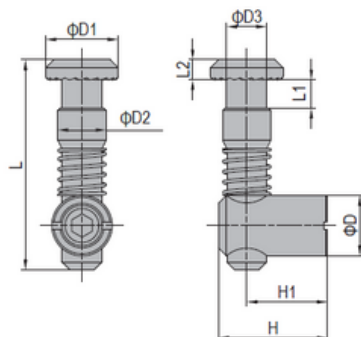

Description	A	D	H	H1	L1	L2	D1	D2	D3	L	Mass	Part No.
PG30-Universal	30	12	21	15	7	4	14	9.9	8	45	38	3.11.30.01
PG40-Universal	32	15	27	20	7	5	18	11.9	10	52	58	3.11.40.01
PG45-Universal	30	15	29.5	22.5	7	5	18	11.9	10	52	60	3.11.45.01


Standard Model P

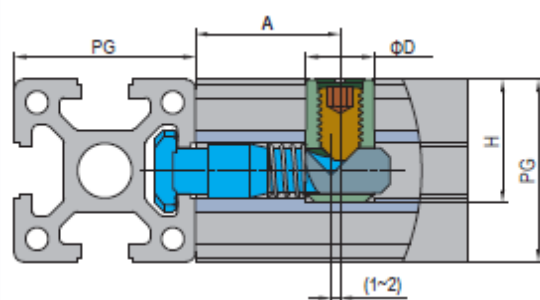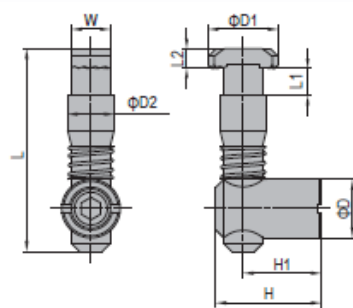

Description	A	D	H	H1	L1	L2	D1	D2	W	L	Mass	Part No.
PG30-Standard (Model P)	30	12	21	15	7	4	14	9.9	8	45	38	3.11.30.02
PG40-Standard (Model P)	32	15	27	20	7	5	18	11.9	10	52	58	3.11.40.02
PG45-Standard (Model P)	30	15	29.5	22.5	7	5	18	11.9	10	52	60	3.11.45.02






Standard Model C

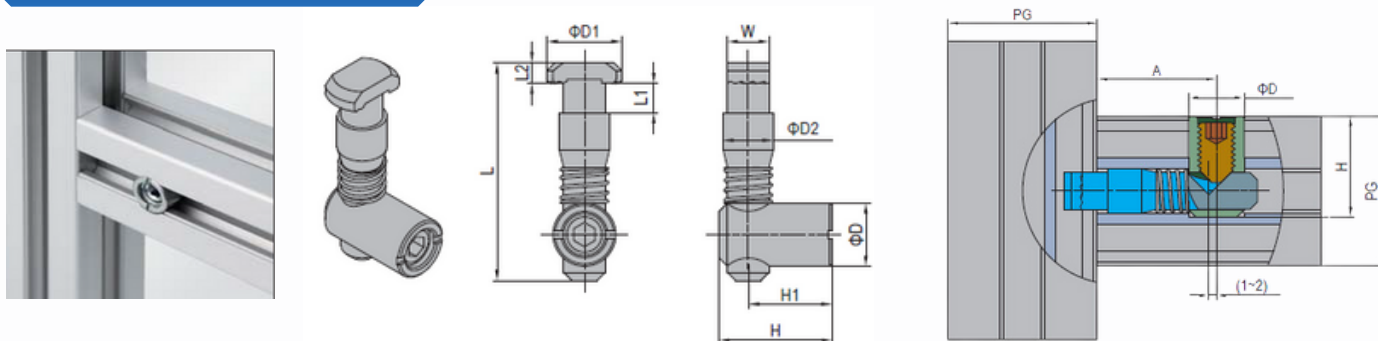

Description	A	D	H	H1	L1	L2	D1	D2	W	L	Mass	Part No.
PG30-Standard (Model C)	30	12	21	15	7	4	14	9.9	8	45	38	3.11.30.03
PG40-Standard (Model C)	32	15	27	20	7	5	18	11.9	10	52	58	3.11.40.03
PG45-Standard (Model C)	30	15	29.5	22.5	7	5	18	11.9	10	52	60	3.11.45.03



Oblique Model P

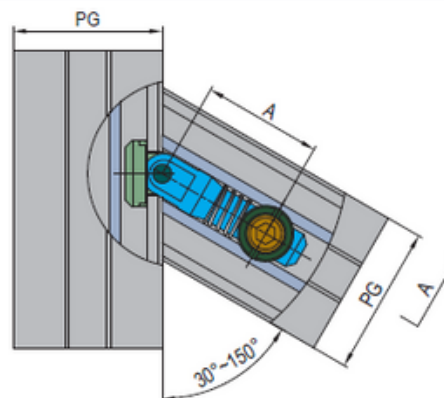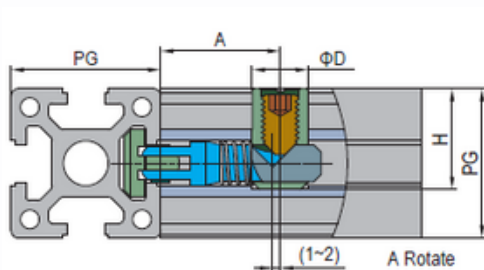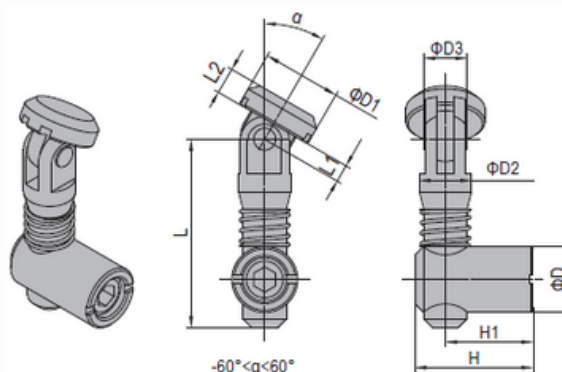

Description	A	D	H	H1	L1	L2	D1	D2	D3	L	Mass	Part No.
PG30-Oblique (Model P)	30	12	21	15	2.2	5	14	9.9	8	38.8	55	3.11.30.04
PG40-Oblique (Model P)	32	15	27	20	4	6	18	11.9	10	43	72	3.11.40.04
PG45-Oblique (Model P)	30	15	29.5	22.5	6	5	18	11.9	10	43	78	3.11.45.04







Oblique Model C

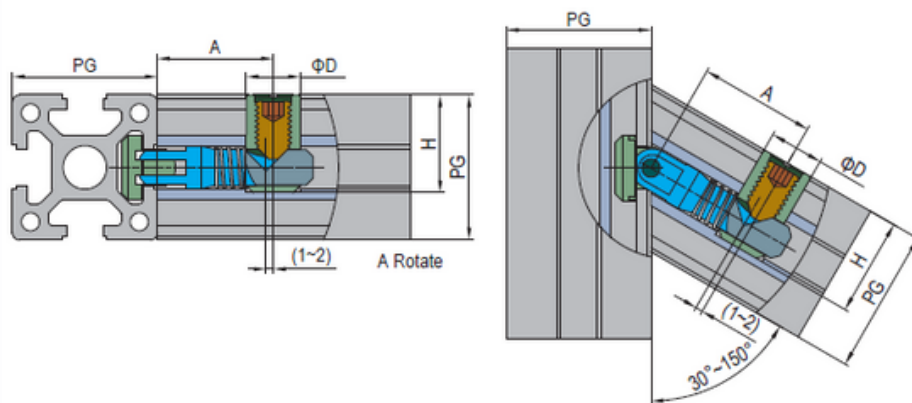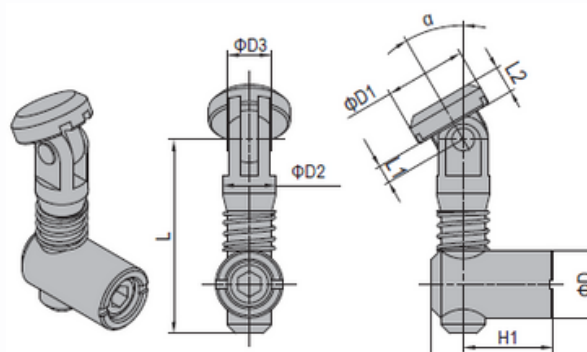

Description	A	D	H	H1	L1	L2	D1	D2	D3	L	Mass	Part No.
PG30-Oblique (Model C)	30	12	21	15	2.2	5	14	9.9	8	38.8	55	3.11.30.05
PG40-Oblique (Model C)	32	15	27	20	4	6	18	11.9	10	43	72	3.11.40.05
PG45-Oblique (Model C)	30	15	29.5	22.5	6	5	18	11.9	10	43	78	3.11.45.05

Miter Model P

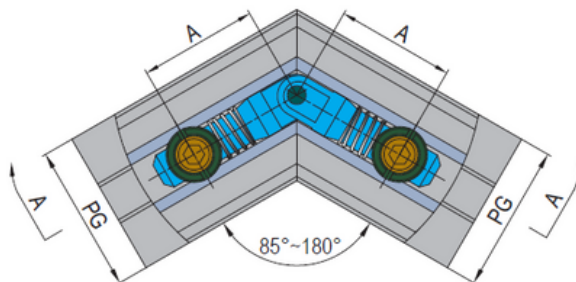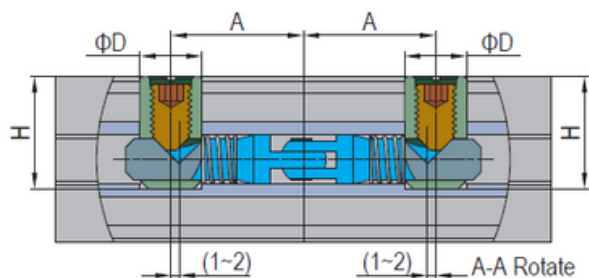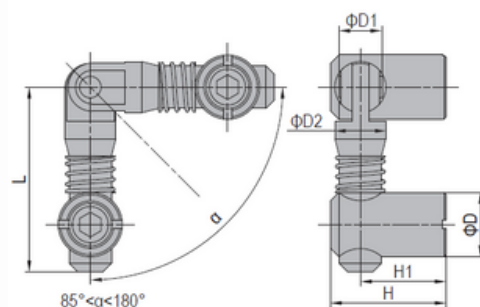

Description	A	D	H	H1	D1	D2	L	Mass	Part No.
PG30-Miter (Model P)	30	12	21	15	8	9.9	38.8	63	3.11.30.06
PG40-Miter (Model P)	32	15	27	20	10	11.9	43	97	3.11.40.06
PG45-Miter (Model P)	30	15	29.5	22.5	10	11.9	43	100	3.11.45.06

Die Cast Bracket

Elementos de unión





Material: Die cast aluminium

Aporta alta fuerza, es de fácil ajuste y utiliza únicamente una ranura para la conexión.

High strength, easily adjust, only 1 slot used for connection



PG20 20x20

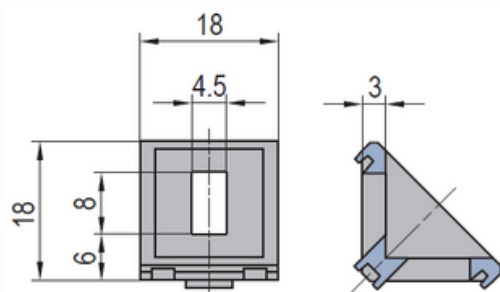

Description	Fastening Set	Mass (g)	Part No.
PG20-20x20 (pcs)		5	3.21.20.2020
PG20-20x20 (set M)	2x M	12	3.21.20.2020.SETM
PG20-20x20 (set Z)	2x Z	12	3.21.20.2020.SETZ

M	Fastening Set	Z	Fastening Set
	M4x8 Bolt		M4x8 Bolt
	M4 T Nut		M4 Pre-set Nut


PG30 30x30

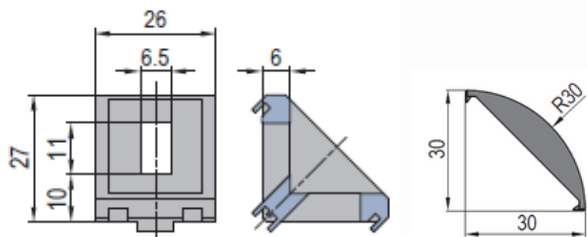


Description	Fastening Set	Mass (g)	Part No.
PG30-30x30 (pcs)		21	3.21.30.3030
PG30-30x30 (set A)	2x A	42	3.21.30.3030.SETA
PG30-30x30 (set B)	2x B	48	3.21.30.3030.SETB
Bracket Cap PG30-30x30		3	3.22.30.3030
PG30-30x60 (pcs)		53	3.21.30.3060
PG30-30x60 (set A)	4x A	93	30.2.02.030060.02.SETA
PG30-30x60 (set B)	4x B	105	3.21.30.3060.SETB
Bracket Cap PG30-30x60		12.4	3.22.30.3060
PG30-60x60 (pcs)		120	3.21.30.6060
PG30-60x60 (set A)	8x A	200	3.21.30.6060.SETA
PG30-60x60 (set B)	8x B	224	3.21.30.6060.SETB
Bracket Cap PG30-60x60		13.9	3.22.30.6060

A	Fastening Set	B	Fastening Set
	M6x14 Bolt		M6x14 Bolt
	M6 Washer		M6 Washer
	M6 T Nut		M6 Pre-set Nut


PG30 30x60

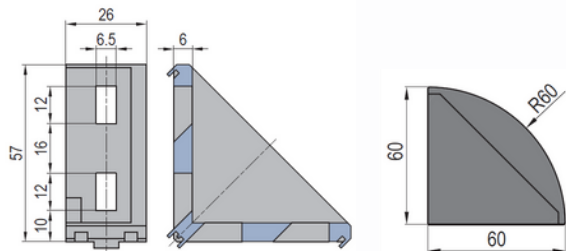


PG30 60x60

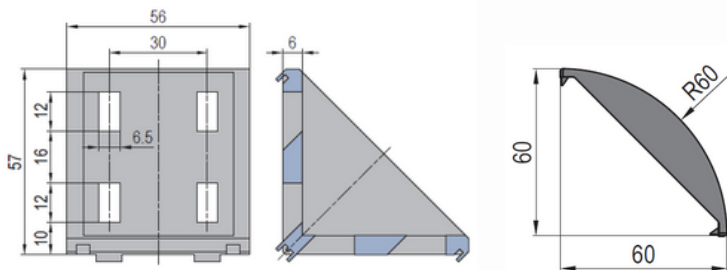


PG40 40x40

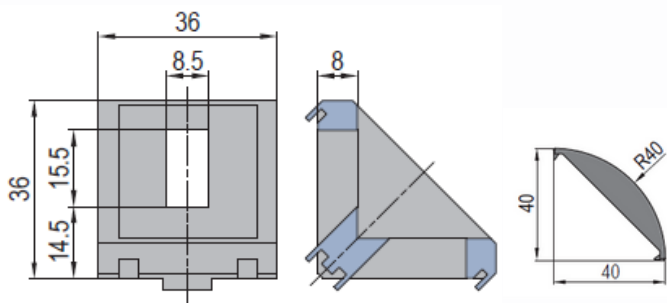






PG40 40x80

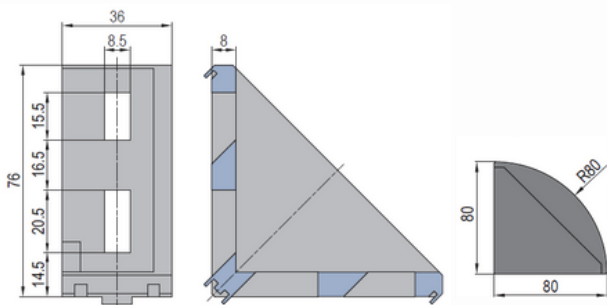



PG40 80x80

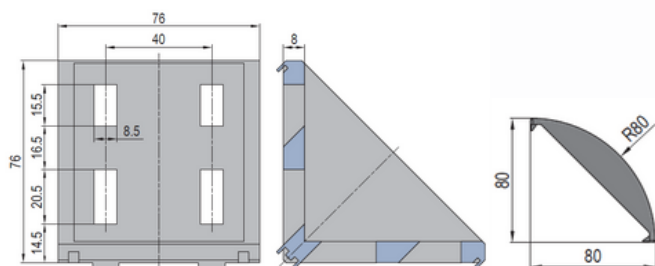


Description	Fastening Set	Mass (g)	Part No.
PG40-40x40 (pcs)		50	3.21.40.4040
PG40-40x40 (set C)	2xC	92	3.21.40.4040.SETC 
PG40-40x40 (set D)	2xD	92	3.21.40.4040.SETD
PG40-40x40 (set E)	2xE	106	3.21.40.4040.SETE
Bracket Cap PG40-4040		6	3.22.40.4040
PG40- 40x80 (pcs)		125	3.21.40.4080
PG40-40x80 (set C)	4xC	210	3.21.40.4080.SETC 
PG40-40x80 (set F)	4xF	220	3.21.40.4080.SETF
PG40-40x80 (set G)	4xG	250	3.21.40.4080.SETG
Bracket Cap PG40-40x80		22.6	3.22.40.4080
PG40-80x80 (pcs)		260	3.21.40.8080
PG40-80x80 (set C)	8xC	428	3.21.40.8080.SETC 
PG40-80x80 (set F)	8xF	452	3.21.40.8080.SETF
PG40-80x80 (set G)	8xG	508	3.21.40.8080.SETG
Bracket Cap PG40-8080		25.6	3.22.40.8080




PG45 45x45

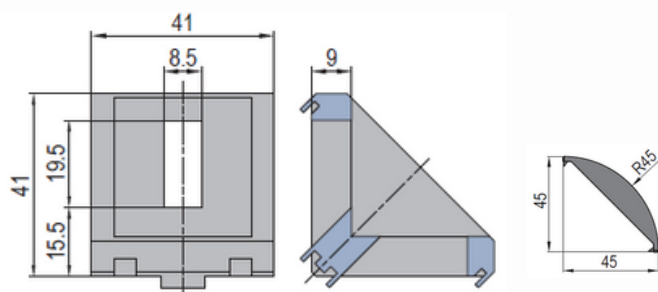

PG45 45x90

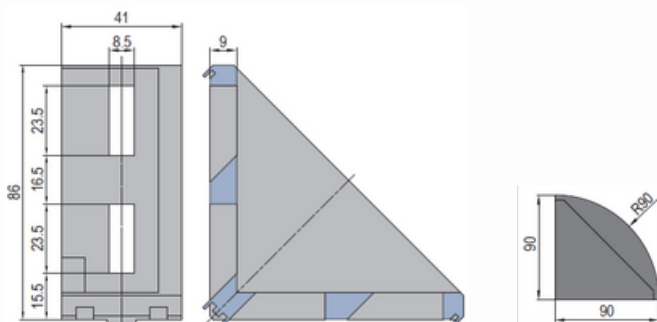


PG40 80x80

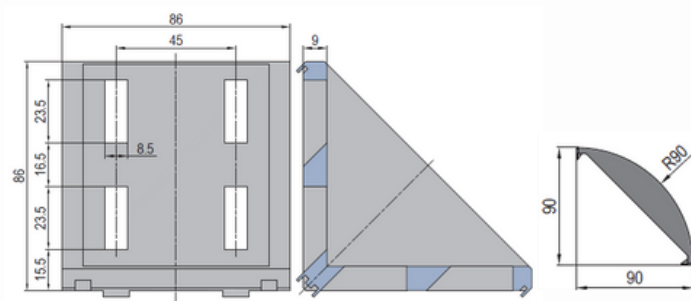


Description	Fastening Set	Mass (g)	Part No.
PG45-45x45 (pcs)		72	3.21.45.4545
PG45-45x45 (set H)	2xH	118	3.21.45.4545.SETH
PG45-45x45 (set J)	2xJ	122	3.21.45.4545.SETJ
PG45-45x45 (set K)	2xK	134	3.21.45.4545.SETK
Bracket Cap PG45-4545		7.6	3.22.45.4545
PG45- 45x90 (pcs)		190	3.21.45.4590
PG45-45x90 (set H)	4xH	282	3.21.45.4590.SETH
PG45-45x90 (set J)	4xJ	290	3.21.45.4590.SETJ
PG45-45x90 (set K)	4xK	314	3.21.45.4590.SETK
Bracket Cap PG45-4590		28.7	3.22.45.4590
PG45-90x90 (pcs)		390	3.21.45.9090
PG45-90x90 (set H)	8xH	574	3.21.45.9090.SETH
PG45-90x90 (set J)	8xJ	590	3.21.45.9090.SETJ
PG45-90x90 (set K)	8xK	638	3.21.45.9090.SETK
Bracket Cap PG45-9090		32.5	3.22.45.9090

H	Fastening Set	J	Fastening Set	K	Fastening Set
	M8 Flange Nut		M8x25 Bolt		M8x25 Bolt
	M8x25 T Bolt		M8 Spring Washer		M8 Spring Washer
			M8 Washer		M8 Washer
			M8 T Nut		M8 Pre-set Nut


PG50 50x50

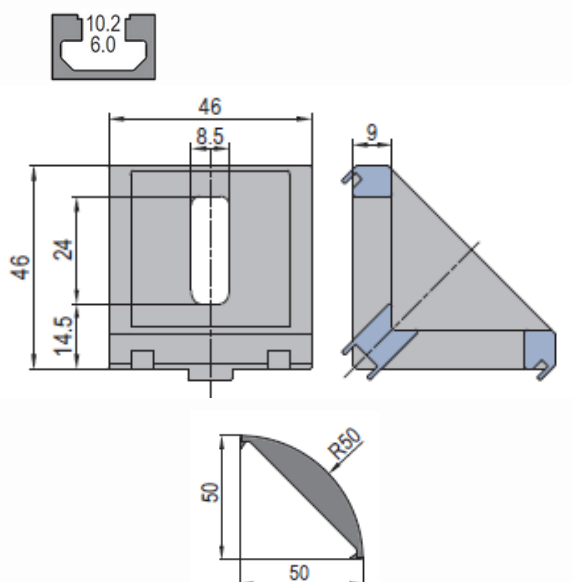




PG50 50x100

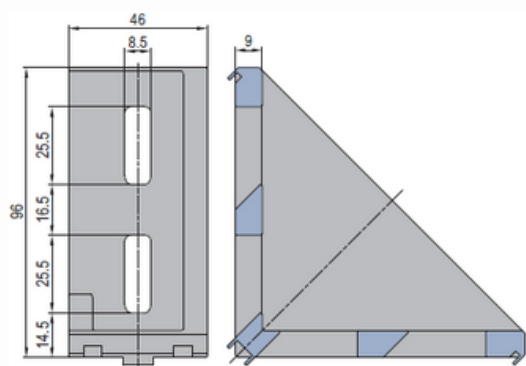

PG50 100x100

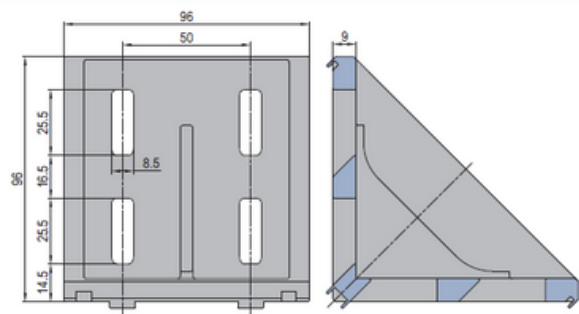

Description	Fastening Set	Mass (g)	Part No.
PG50-50x50 (pcs)		86	3.21.50.5050
PG50-50x50 (set H)	2x H	132	3.21.50.5050.SETH
PG50-50x50 (set J)	2x J	135	3.21.50.5050.SETJ
PG50-50x50 (set K)	2x K	152	3.21.50.5050.SETK
Bracket Cap PG50-5050		9.5	3.22.50.5050
PG50-50x100 (pcs)		235	3.21.50.50100
PG50-50x100 (set H)	4x H	327	3.21.50.50100.SETH
PG50-50x100 (set J)	4x J	333	3.21.50.50100.SETJ
PG50-50x100 (set K)	4x K	365	3.21.50.50100.SETK
PG50-100x100 (pcs)		484	3.21.50.100100
PG50-100x100 (set H)	8x H	668	3.21.50.100100.SETH
PG50-100x100 (set J)	8x J	680	3.21.50.100100.SETJ
PG50-100x100 (set K)	8x K	744	3.21.50.100100.SETK






Material: 6063-T6 Aluminium, anodized

Esta conexión tipo T entre perfiles añade fuerza, versatilidad y es de fácil uso.


T connection between profiles, adds high strength, good versatility, easy use.

35x35x4




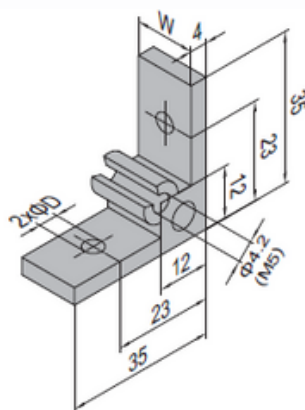


Application	Description	D (mm)	W (mm)	Fastening Set	Machining Code	Mass (g)	Part No.
PG15 15mm 	35-15-15 (pcs)	4.5	10			8	3.31.35.15.15
	35-15-15 (set/)	4.5	10	2xN		20	3.31.35.15.15.SET
	35-15-15 (M5/)	4.5	10		M5	8	3.31.35.15.15.M5
	35-15-15 (M5)	4.5	10	2xN+1xP	M5	22	3.31.35.15.15.M5.SET
PG15 30mm 	35-15-30 (pcs)	4.5	25			21	3.31.35.15.30
	35-15-30 (set)	4.5	25	2xN		33	3.31.35.15.30.SET
	35-15-30 (M5)	4.5	25		M5	21	3.31.35.15.30.M5
	35-15-30 (M5 set)	4.5	25	2xN+1xP	M5	35	3.31.35.15.30.M5.SET
PG20 20mm 	35-20-20 (pcs)	4.5	14			12	3.31.35.20.20
	35-20-20 (set)	4.5	14	2xN		24	3.31.35.20.20.SET
	35-20-20 (M5)	4.5	14		M5	12	3.31.35.20.20.M5
	35-20-20 (M5 set)	4.5	14	2xN+1xP	M5	26	3.31.35.20.20.M5.SET
PG30 30mm 	35-30-30 (pcs)	6.5	22			19	3.31.35.30.30
	35-30-30 (set)	6.5	22	2xR		42	3.31.35.30.30.SET
	35-30-30 (M5)	6.5	22		M5	19	3.31.35.30.30.M5
	35-30-30 (M5 set)	6.5	22	2xR+1xP	M5	44	3.31.35.30.30.M5.SET


35x35x4

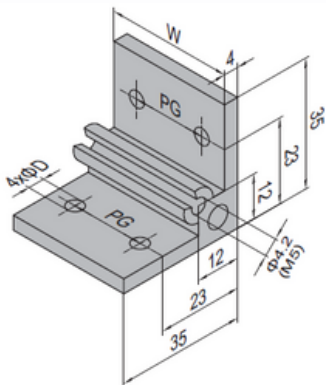




Application	Description	D (mm)	W (mm)	PG (mm)	Fastening Set	Machining Code	Mass (g)	Part No.
	35-20-40 (pcs)	4.5	34	20			29	3.31.35.20.40
	35-20-40 (set)	4.5	34	20	4xN		50	3.31.35.20.40.SET
	35-20-40 (M5)	4.5	34	20		M5	29	3.31.35.20.40.M5
	35-20-40 (M5 set)	4.5	34	20	4xN+1xP	M5	52	3.31.35.20.40.M5.SET
	35-30-60 (pcs)	6.5	52	30			45	3.31.35.30.60
	35-30-60 (set)	6.5	52	30	4xR		88	3.31.35.30.60.SET
	35-30-60 (M5)	6.5	52	30		M5	45	3.31.35.30.60.M5
	35-30-60 (M5 set)	6.5	52	30	4xR+1xP	M5	90	3.31.35.30.60.M5.SET




35x35x4

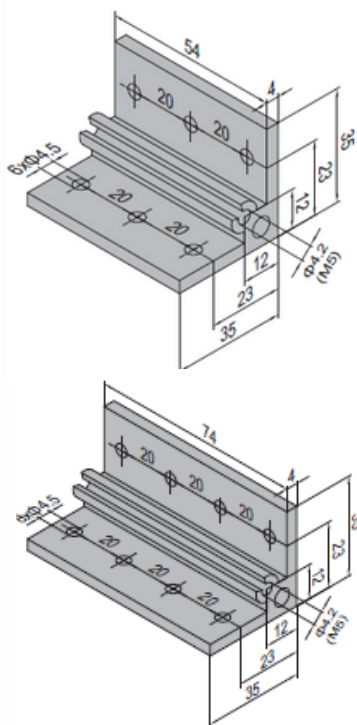

Application	Description	Fastening Set	Machining Code	Mass (g)	Part No.
	35-20-60 (pcs)			47	3.31.35.20.60
	35-20-60 (set)	6xN		77	3.31.35.20.60.SET
	35-20-60 (M5)		M5	47	3.31.35.20.60.M5
	35-20-60 (M5 set)	6xN+1xP	M5	79	3.31.35.20.60.M5.SET
	35-20-80 (pcs)			64	3.31.35.20.80
	35-20-80 (set)	8xN		103	3.31.35.20.80.SET
	35-20-80 (M5)		M5	64	3.31.35.20.80.M5
	35-20-80 (M5 set)	8xN+1xP	M5	105	3.31.35.20.80.M5.SET



40A-30-30




Description	Fastening Set	D (mm)	W (mm)	Mass (g)	Part No.
Angle Profile Bracket 40A-30-30 (SET F)	2xF	6.5	26	41	30.2.04.030030.02.SETF



F	Fastening Set
	M8x20 Bolt
	M6 Spring Bolt
	M6 T Nut

40A-40-40




Description	Fastening Set	D (mm)	W (mm)	Mass (g)	Part No.
Angle Profile Bracket 40A-40-40 (SET U)	2xU	8.5	34	81	40.2.04.040040.02.SETU








U	Fastening Set
	M8x16 Bolt
	M8 Spring Bolt
	M6 T Nut



50x50x9

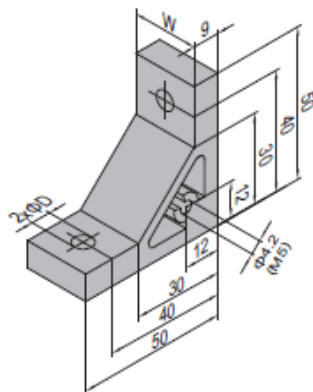

Application	Description	D (mm)	W (mm)	Fastening Set	Machining Code	Mass (g)	Part No.
PG20 20mm 	50-20-20 (pcs)	4.5	14			31	3.31.50.20.20
	50-20-20(set)	4.5	14	2x U		43	3.31.35.20.20.SET
	50-20-20(M5)	4.5	14		M5	31	3.31.50.20.20.M5
	50-20-20 (M5 set)	4.5	14	2x U +1x P	M5	45	3.31.50.20.20.M5.SET
PG30 30mm 	50-30-30 (pcs)	6.5	22			48	3.31.50.30.30
	50-30-30 (set)	6.5	22	2x V		71	3.31.50.30.30.SET
	50-30-30 (M5)	6.5	22		M5	48	3.31.50.30.30.M5
	50-30-30 (M5 set)	6.5	22	2x V +1x P	M5	73	3.31.50.30.30.M5.SET
PG40 40mm 	50-40-40 (pcs)	8.5	30			66	3.31.50.40.40
	50-40-40 (set)	8.5	30	2x D		112	3.31.50.40.40.SET
	50-40-40 (M5)	8.5	30		M5	66	3.31.50.40.40.M5
	50-40-40(M5 set)	8.5	30	2x D +1x P	M5	114	3.31.50.40.40.M5.SET
PG40 60mm 	50-40-60 (pcs/)	8.5	50			110	3.31.50.40.60
	50-40-60 (set)	8.5	50	2x D		156	3.31.50.40.60.SET
	50-40-60 (M5)	8.5	50		M5	110	3.31.50.40.60.M5
	50-40-60 (M5 set)	8.5	50	2x D +1x P	M5	158	3.31.50.40.60.M5.SET
PG45 45mm 	50-45-45 (pcs)	8.5	35			77	3.31.50.45.45
	50-45-45 (set)	8.5	35	2x D		123	3.31.50.45.45.SET
	50-45-45 (M5)	8.5	35		M5	77	3.31.50.45.45.M5
	50-45-45 (M5 set)	8.5	35	2x D +1x P	M5	125	3.31.50.45.45.M5.SET
PG45 60mm 	50-45-60 (pcs)	8.5	50			110	3.31.50.45.60
	50-45-60 (set)	8.5	50	2x D		156	3.31.50.45.60.SET
	50-45-60 (M5)	8.5	50		M5	110	3.31.50.45.60.M5
	50-45-60 (M5 set)	8.5	50	2x D +1x P	M5	158	3.31.50.45.60.M5.SET
PG50 50mm 	50-50-50 (pcs)	8.5	40			88	3.31.50.50.50
	50-50-50 (set)	8.5	40	2x D		134	3.31.50.50.50.SET
	50-50-50 (M5)	8.5	40		M5	88	3.31.50.50.50.M5
	50-50-50(M5 set)	8.5	40	2x D +1x P	M5	136	3.31.50.50.50.M5.SET
PG60 60mm 	50-60-60 (pcs)	8.5	50			110	3.31.50.60.60
	50-60-60 (set)	8.5	50	2x D		156	3.31.50.60.60.SET
	50-60-60 (M5)	8.5	50		M5	110	3.31.50.60.60.M5
	50-60-60 (M5 set)	8.5	50	2x D +1x P	M5	158	3.31.50.60.60.M5.SET




50x50x9

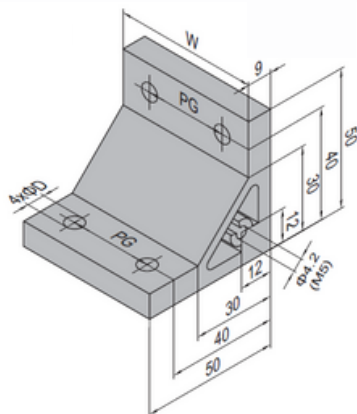


Application	Description	D (mm)	W (mm)	PG (mm)	Fastening Set	Machining Code	Mass (g)	Part No.
PG20 40mm 	50-20-40 (pcs)	4.5	34	20			75	3.31.50.20.40
	50-20-40 (set)	4.5	34	20	4x N		95	3.31.50.20.40.SET
	50-20-40 (M5)	4.5	34	20		M5	75	3.31.50.20.40.M5
	50-20-40 (M5 set)	4.5	34	20	4x U +1x P	M5	97	3.31.50.20.40.M5.SET
PG30 60mm 	50-30-60 (pcs)	6.5	52	30			114	3.31.50.30.60
	50-30-60 (set)	6.5	52	30	4x V		156	3.31.50.30.60.SET
	50-30-60 (M5)	6.5	52	30		M5	114	3.31.50.30.60.M5
	50-30-60 (M5 set)	6.5	52	30	4x V +1x P	M5	158	3.31.50.30.60.M5.SET
PG40 80mm 	50-40-80 (pcs)	8.5	70	40			154	3.31.50.40.80
	50-40-80 (set)	8.5	70	40	4x D		240	3.31.50.40.80.SET
	50-40-80 (M5)	8.5	70	40		M5	154	3.31.50.40.80.M5
	50-40-80 (M5 set)	8.5	70	40	4x D +1x P	M5	242	3.31.50.40.80.M5.SET
PG45 90mm 	50-45-90 (pcs)	8.5	80	45			176	3.31.50.45.90
	50-45-90 (set)	8.5	80	45	4x D		262	3.31.50.45.90.SET
	50-45-90 (M5)	8.5	80	45		M5	176	3.31.50.45.90.M5
	50-45-90 (M5 set)	8.5	80	45	4x D +1x P	M5	264	3.31.50.45.90.M5.SET
PG50 100mm 	50-50-100 (pcs)	8.5	90	50			198	3.31.50.50.100
	50-50-100 (set)	8.5	90	50	4x D		284	3.31.50.50.100.SET
	50-50-100 (M5)	8.5	90	50		M5	198	3.31.50.50.100.M5
	50-50-100 (M5 set)	8.5	90	50	4x D +1x P	M5	286	3.31.50.50.100.M5.SET

50x50x9



Application	Description	D (mm)	W (mm)	PG (mm)	Fastening Set	Machining Code	Mass (g)	Part No.
PG20 60mm 	50-20-60 (pcs)	4.5	54	20			119	3.31.50.20.60
	50-20-60 (set)	4.5	54	20	6xU		147	3.31.50.20.60.SET
	50-20-60 (M5)	4.5	54	20		M5	119	3.31.50.20.60.M5
	50-20-60 (M5 set)	4.5	54	20	6xU+1xP	M5	149	3.31.50.20.60.M5.SET
PG30 90mm 	50-30-90 (pcs)	6.5	82	30			180	3.31.50.30.90
	50-30-90 (set)	6.5	82	30	6xV		241	3.31.50.30.90.SET
	50-30-90 (M5)	6.5	82	30		M5	180	3.31.50.30.90.M5
	50-30-90 (M5 set)	6.5	82	30	6xV+1xP	M5	243	3.31.50.30.90.M5.SET
PG40 120mm 	50-40-120 (pcs)	8.5	110	40			242	3.31.50.40.120
	50-40-120 (set)	8.5	110	40	6xD		372	3.31.50.40.120.SET
	50-40-120 (M5)	8.5	110	40		M5	242	3.31.50.40.120.M5
	50-40-120 (M5 set)	8.5	110	40	6xD+1xP	M5	374	3.31.50.40.120.M5.SET

50x50x9

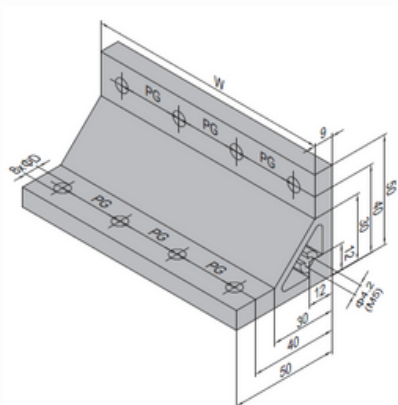

Application	Description	D (mm)	W (mm)	PG (mm)	Fastening Set	Machining Code	Mass (g)	Part No.
PG20 80mm 	50-20-80 (pcs)	4.5	74	20			163	3.31.50.20.80
	50-20-80 (set)	4.5	74	20	8xU		199	3.31.50.20.80.SET
	50-20-80 ()	4.5	74	20		M5	163	3.31.50.20.80.M5
	50-20-80 (M5 set)	4.5	74	20	8xU+1xP	M5	201	3.31.50.20.80.M5.SET
PG30 120mm 	50-30-120 (pcs)	6.5	112	30			246	3.31.50.30.120
	50-30-120 (set)	6.5	112	30	6xV		326	3.31.50.30.120.SET
	50-30-120 (M5)	6.5	112	30		M5	246	3.31.50.30.120.M5
	50-30-120 (M5 set)	6.5	112	30	8xV+1xP	M5	328	3.31.50.30.120.M5.SET
PG40 160mm 	50-40-160 (pcs)	8.5	150	40			330	3.31.50.40.160
	50-40-160 (set)	8.5	150	40	8xD		502	3.31.50.40.160.SET
	50-40-160 (M5)	8.5	150	40		M5	330	3.31.50.40.160.M5
	50-40-160 (M5 set)	8.5	150	40	8xD+1xP	M5	504	3.31.50.40.160.M5.SET
PG45 180mm 	50-45-180 (pcs)	8.5	170	45			374	3.31.50.45.180
	50-45-180 (set)	8.5	170	45	8xD		546	3.31.50.45.180.SET
	50-45-180 (M5)	8.5	170	45		M5	374	3.31.50.45.180.M5
	50-45-180 (M5 set)	8.5	170	45	8xD+1xP	M5	548	3.31.50.45.180.M5.SET

U	Fastening Set
	M4x14 Bolt
	M4 Washer
	M4 T Nut


V	Fastening Set
	M6x16 Bolt
	M6 Washer
	M6 T Nut

M5	Fastening Set
	M5x10 Bolt

D	Fastening Set
	M8x20 Bolt
	M8 Washer
	M8 T Nut


P	Fastening Set
	M5x10 Bolt
	M5 Washer

70x70x9-135°

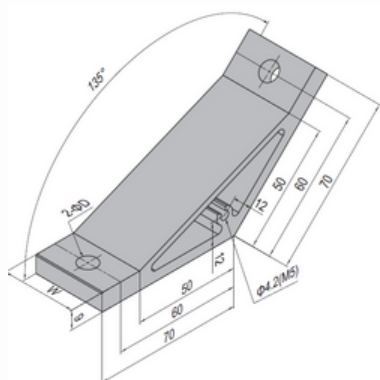


Application	Description	D (mm)	W (mm)	Fastening Set	Machining Code	Mass (g)	Part No.
PG30 30mm 	70-30-30 (pcs)	7	22			71	3.31.70.30.30
	70-30-30 (set)	7	22	2xV		94	3.31.70.30.30.SET
	70-30-30 (M5)	7	22		M5	71	3.31.70.30.30.M5
	70-30-30 (M5 set)	7	22	2xV+1xP	M5	96	3.31.70.30.30.M5.SET
PG40 40mm 	70-40-40 (pcs)	9	30			96	3.31.70.40.40
	70-40-40 (set)	9	30	2xD		142	3.31.70.40.40.SET
	70-40-40 (M5)	9	30		M5	96	3.31.70.40.40.M5
	70-40-40 (M5 set)	9	30	2xD+1xP	M5	144	3.31.70.40.40.M5.SET
PG40 60mm 	70-40-60 (set)	9	50			166	3.31.70.40.60
	70-40-60 (set)	9	50	2xD		212	3.31.70.40.60.SET
	70-40-60 (M5)	9	50		M5	166	3.31.70.40.60.M5
	70-40-60 (M5 set)	9	50	2xD+1xP	M5	214	3.31.70.40.60.M5.SET
PG45 45mm 	70-45-45 (pcs)	9	35			113	3.31.70.45.45
	70-45-45 (set)	9	35	2xD		159	3.31.70.45.45.SET
	70-45-45 (M5)	9	35		M5	113	3.31.70.45.45.M5
	70-45-45 (M5 set)	9	35	2xD+1xP	M5	161	3.31.70.45.45.M5.SET
PG45 60mm 	70-45-60 (pcs)	9	50			166	3.31.70.45.60
	70-45-60 (set)	9	50	2xD		212	3.31.70.45.60.SET
	70-45-60 (M5)	9	50		M5	166	3.31.70.45.60.M5
	70-45-60 (M5 set)	9	50	2xD+1xP	M5	214	3.31.70.45.60.M5.SET
PG50 50mm 	70-50-50 (pcs)	9	40			131	3.31.70.50.50
	70-50-50 (set)	9	40	2xD		177	3.31.70.50.50.SET
	70-50-50 (M5)	9	40		M5	131	3.31.70.50.50.M5
	70-50-50 (M5 set)	9	40	2xD+1xP	M5	179	3.31.70.50.50.M5.SET
PG60 60mm 	70-60-60 (pcs)	9	50			166	3.31.70.60.60
	70-60-60 (set)	9	50	2xD		212	3.31.70.60.60.SET
	70-60-60 (M5)	9	50		M5	166	3.31.70.60.60.M5
	70-60-60 (M5 set)	9	50	2xD+1xP	M5	214	3.31.70.60.60.M5.SET

70x70x9-135°




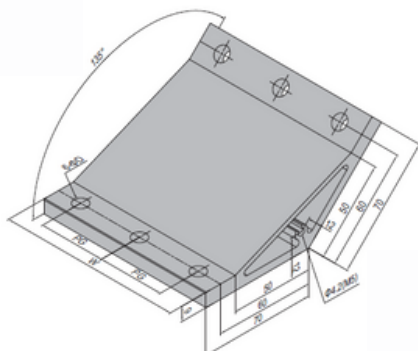


Application	Description	D (mm)	W (mm)	PG (mm)	Fastening Set	Machining Code	Mass (g)	Part No.
PG30 90mm 	70-30-90 (pcs)	7	82	30			270	3.31.70.30.90
	70-30-90 (set)	7	82	30	6xV		331	3.31.70.30.90.SET
	70-30-90 (M5)	7	82	30		M5	270	3.31.70.30.90.M5
	70-30-90 (M5 set)	7	82	30	6xV+1xP	M5	333	3.31.70.30.90.M5.SET
PG40 120mm 	70-40-120 (pcs)	9	110	40			357	3.31.70.40.120
	70-40-120 (set)	9	110	40	6xD		487	3.31.70.40.120.SET
	70-40-120 (M5)	9	110	40		M5	357	3.31.70.40.120.M5
	70-40-120 (M5 set)	9	110	40	6xV+1xP	M5	489	3.31.70.40.120.M5.SET


70x70x9-135°

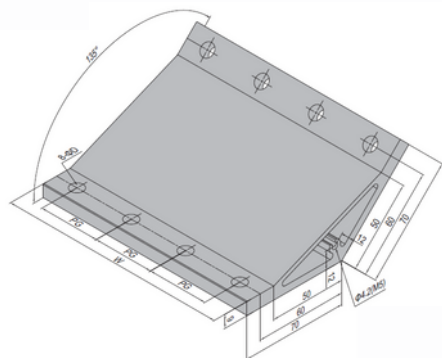

Application	Description	D (mm)	W (mm)	PG (mm)	Fastening Set	Machining Code	Mass (g)	Part No.
PG30 120mm 	70-30-120 (pcs)	7	112	30			369	3.31.70.30.120
	70-30-120 (set)	7	112	30	8xV		449	3.31.70.30.120.SET
	70-30-120 (M5)	7	112	30		M5	369	3.31.70.30.120.M5
	70-30-120 (M5 set)	7	112	30	8xV+1xP	M5	451	3.31.70.30.120.M5.SET
PG40 160mm 	70-40-160 (pcs)	9	150	40			488	3.31.70.40.160
	70-40-160 (set)	9	150	40	8xD		660	3.31.70.40.160.SET
	70-40-160 (M5)	9	150	40		M5	488	3.31.70.40.160.M5
	70-40-160(M5 set)	9	150	40	8xD+1xP	M5	662	3.31.70.40.160.M5.SET
PG45 180mm 	70-45-180 (pcs)	9	170	45			558	3.31.70.45.180
	70-45-180 (set)	9	170	45	8xD		730	3.31.70.45.180.SET
	70-45-180 (M5)	9	170	45		M5	558	3.31.70.45.180.M5
	70-45-180 (M5 set)	9	170	45	8xD+1xP	M5	732	3.31.70.45.180.M5.SET




80x80x9-45°




Application	Description	D (mm)	W (mm)	Fastening Set	Machining Code	Mass (g)	Part No.
PG30 30mm 	80-30-30 (pcs)	7	22			68	3.31.80.30.30
	80-30-30 (set)	7	22	2xV		91	3.31.80.30.30.SET
	80-30-30 (M5)	7	22		M5	68	3.31.80.30.30.M5
	80-30-30 (M5 set)	7	22	2xV+1xP	M5	93	3.31.80.30.30.M5.SET
PG40 40mm 	80-40-40 (pcs)	9	30			29	3.31.80.40.40
	80-40-40 (set)	9	30	2xD		135	3.31.80.40.40.SET
	80-40-40 (M5)	9	30		M5	89	3.31.80.40.40.M5
	80-40-40 (M5 set)	9	30	2xD+1xP	M5	137	3.31.80.40.40.M5.SET
PG40 60mm 	80-40-60 (set)	9	50			151	3.31.80.40.60
	80-40-60(set)	9	50	2xD		197	3.31.80.40.60.SET
	80-40-60 (M5)	9	50		M5	151	3.31.80.40.60.M5
	80-40-60 (M5 set)	9	50	2xD+1xP	M5	199	3.31.80.40.60.M5.SET
PG45 45mm 	80-45-45 (pcs)	9	35			105	3.31.80.45.45
	80-45-45 (set)	9	35	2xD		151	3.31.80.45.45.SET
	80-45-45 (M5)	9	35		M5	105	3.31.80.45.45.M5
	80-45-45 (M5 set)	9	35	2xD+1xP	M5	153	3.31.80.45.45.M5.SET
PG45 60mm 	80-45-60 (pcs)	9	50			151	3.31.80.45.60
	80-45-60 (set)	9	50	2xD		197	3.31.80.45.60.SET
	80-45-60 (M5)	9	50		M5	151	3.31.80.45.60.M5
	80-45-60 (M5 set)	9	50	2xD+1xP	M5	199	3.31.80.45.60.M5.SET
PG50 50mm 	80-50-50 (pcs)	9	40			120	3.31.80.50.50
	80-50-50 (set)	9	40	2xD		166	3.31.80.50.50.SET
	80-50-50 (M5)	9	40		M5	120	3.31.80.50.50.M5
	80-50-50 (M5 set)	9	40	2xD+1xP	M5	168	3.31.80.50.50.M5.SET
PG60 60mm 	80-60-60 (pcs)	9	50			151	3.31.80.60.60
	80-60-60 (set)	9	50	2xD		197	3.31.80.60.60.SET
	80-60-60 (M5)	9	50		M5	151	3.31.80.60.60.M5
	80-60-60 (M5 set)	9	50	2xD+1xP	M5	199	3.31.80.60.60.M5.SET

80x80x9-45°

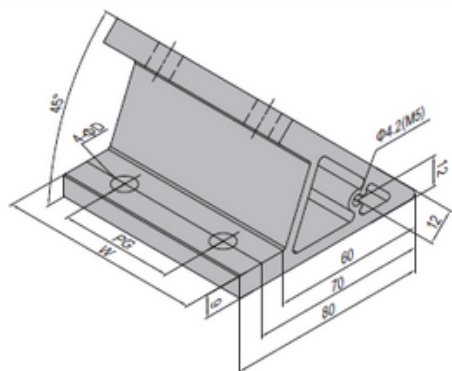


Description	D (mm)	W (mm)	PG (mm)	Fastening Set	Machining Code	Mass (g)	Part No.
80-30-60 (pcs)	7	52	30			156	3.31.80.30.60
80-30-60 (set)	7	52	30	4xV		198	3.31.80.30.60.SET
80-30-60(M5)	7	52	30		M5	156	3.31.80.30.60.M5
80-30-60 (M5 set)	7	52	30	4xV+1xP	M5	200	3.31.80.30.60.M5.SET
80-40-80 (pcs)	9	70	40			209	3.31.80.40.80
80-40-80 (set)	9	70	40	4xD		295	3.31.80.40.80.SET
80-40-80 (M5)	9	70	40		M5	209	3.31.80.40.80.M5
80-40-80 (M5 set)	9	70	40	4xD+1xP	M5	297	3.31.80.40.80.M5.SET
80-45-90 (pcs)	9	80	45			240	3.31.80.45.90
80-45-90 (set)	9	80	45	4xD		326	3.31.80.45.90.SET
80-45-90 (M5)	9	80	45		M5	240	3.31.80.45.90.M5
80-45-90 (M5 set)	9	80	45	4xD+1xP	M5	328	3.31.80.45.90.M5.SET
80-50-100 (pcs)	9	90	50			271	3.31.80.50.100
80-50-100(set)	9	90	50	4xD		357	3.31.80.50.100.SET
80-50-100 (M5)	9	90	50		M5	271	3.31.80.50.100.M5
80-50-100 (M5 set)	9	90	50	4xD+1xP	M5	359	3.31.80.50.100.M5.SET



80x80x9-45°




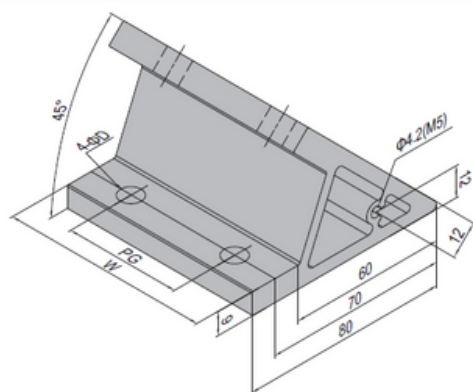



Description	D (mm)	W (mm)	PG (mm)	Fastening Set	Machining Code	Mass (g)	Part No.
80-30-90 (pcs)	7	82	30			247	3.31.80.30.90
80-30-90 (set)	7	82	30	6xV		308	3.31.80.30.90.SET
80-30-90(M5)	7	82	30		M5	247	3.31.80.30.90.M5
80-30-90 (M5 set)	7	82	30	6xV+1xP	M5	310	3.31.80.30.90.M5.SET
80-40-120 (pcs)	9	110	40			329	3.31.80.40.120
80-40-120 (set)	9	110	40	6xD		459	3.31.80.40.120.SET
80-40-120 (M5)	9	110	40		M5	329	3.31.80.40.120.M5
80-40-120 (M5 set)	9	110	40	6xD+1xP	M5	461	3.31.80.40.120.M5.SET

80x80x9-45°

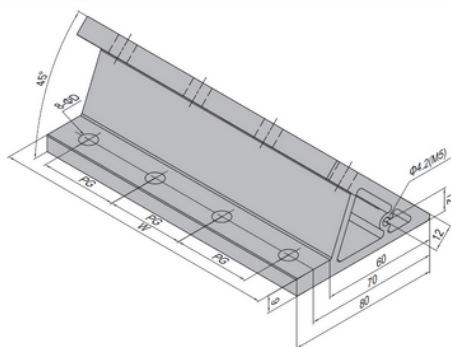


Application	Description	D (mm)	W (mm)	PG (mm)	Fastening Set	Machining Code	Mass (g)	Part No.
PG30 120mm 	80-30-120 (pcs)	7	112	30			337	3.31.80.30.120
	80-30-120 (set)	7	112	30	8xV		417	3.31.80.30.120.SET
	80-30-120 (M5)	7	112	30		M5	337	3.31.80.30.120.M5
	80-30-120 (M5 set)	7	112	30	8xV+1xP	M5	419	3.31.80.30.120.M5.SET
PG40 160mm 	80-40-160 (pcs)	9	150	40			449	3.31.80.40.160
	80-40-160 (set)	9	150	40	8xD		621	3.31.80.40.160.SET
	80-40-160 (M5)	9	150	40		M5	449	3.31.80.40.160.M5
	80-40-160 (M5 set)	9	150	40	8xD+1xP	M5	623	3.31.80.40.160.M5.SET
PG45 180mm 	80-45-180 (pcs)	9	170	45			510	3.31.80.45.180
	80-45-180 (set)	9	170	45	8xD		682	3.31.80.45.180.SET
	80-45-180 (M5)	9	170	45		M5	510	3.31.80.45.180.M5
	80-45-180 (M5 set)	9	170	45	8xD+1xP	M5	684	3.31.80.45.180.M5.SET




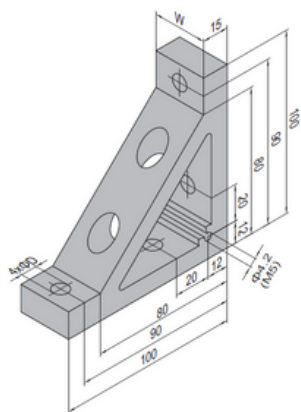


Application	Description	D (mm)	W (mm)	Fastening Set	Machining Code	Mass (g)	Part No.
 PG40 40mm	100-40-40 (pcs)	9	30			220	3.31.100.40.40
	100-40-40 (set)	9	30	2xW+2xJ		324	3.31.100.40.40.SET
	100-40-40 (M5)	9	30		M5	220	3.31.100.40.40.M5
	100-40-40 (M5 set)	9	30	2xW+2xJ+1xP	M5	326	3.31.100.40.40.M5.SET
 PG40 60mm	100-40-60 (pcs)	9	50			386	3.31.100.40.60
	100-40-60 (set)	9	50	2xW+2xJ		490	3.31.100.40.60.SET
	100-40-60 (M5)	9	50		M5	386	3.31.100.40.60.M5
	100-40-60 (M5 set)	9	50	2xW+2xJ+1xP	M5	492	3.31.100.40.60.M5.SET
 PG45 45mm	100-45-45 (pcs)	9	35			261	3.31.100.45.45
	100-45-45 (set)	9	35	2xW+2xJ		365	3.31.100.45.45.SET
	100-45-45 (M5)	9	35		M5	261	3.31.100.45.45.M5
	100-45-45 (M5 set)	9	35	2xW+2xJ+1xP	M5	367	3.31.100.45.45.M5.SET
 PG45 60mm	100-45-60 (pcs)	9	50			386	3.31.100.45.60
	100-45-60 (set)	9	50	2xW+2xJ		490	3.31.100.45.60.SET
	100-45-60 (M5)	9	50		M5	386	3.31.100.45.60.M5
	100-45-60 (M5 set)	9	50	2xW+2xJ+1xP	M5	492	3.31.100.45.60.M5.SET
 PG50 50mm	100-50-50 (pcs)	9	40			303	3.31.100.50.50
	100-50-50 (set)	9	40	2xW+2xJ		407	3.31.100.50.50.SET
	100-50-50 (M5)	9	40		M5	303	3.31.100.50.50.M5
	100-50-50 (M5 set)	9	40	2xW+2xJ+1xP	M5	409	3.31.100.50.50.M5.SET
 PG60 60mm	100-60-60 (pcs)	9	50			386	3.31.100.60.60
	100-60-60 (set)	9	50	2xW+2xJ		490	3.31.100.60.60.SET
	100-60-60 (M5)	9	50		M5	386	3.31.100.60.60.M5
	100-60-60 (M5 set)	9	50	2xW+2xJ+1xP	M5	492	3.31.100.60.60.M5.SET

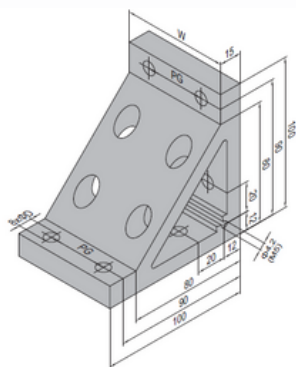

Application	Description	D (mm)	W (mm)	PG (mm)	Fastening Set	Machining Code	Mass (g)	Part No.
PG40 80mm 	100-40-80 (pcs)	9	70	40			522	3.31.100.40.80
	100-40-80 (set)	9	70	40	4xW+4xJ		730	3.31.100.40.80.SET
	100-40-80 (M5)	9	70	40		M5	522	3.31.100.40.80.M5
	100-40-80 (M5 set)	9	70	40	4xW+4xJ+1xP	M5	732	3.31.100.40.80.M5.SET
PG45 90mm 	100-45-90 (pcs)	9	80	45			605	3.31.100.45.90
	100-45-90 (set)	9	80	45	4xW+4xJ		813	3.31.100.45.90.SET
	100-45-90 (M5)	9	80	45		M5	605	3.31.100.45.90.M5
	100-45-90 (M5 set)	9	80	45	4xW+4xJ+1xP	M5	815	3.31.100.45.90.M5.SET
PG50 100mm 	100-50-100 (pcs)	9	90	50			688	3.31.100.50.100
	100-50-100 (set)	9	90	50	4xW+4xJ		896	3.31.100.50.100.SET
	100-50-100 (M5)	9	90	50		M5	688	3.31.100.50.100.M5
	100-50-100 (M5 set)	9	90	50	4xW+4xJ+1xP	M5	898	3.31.100.50.100.M5.SET


100x100x15

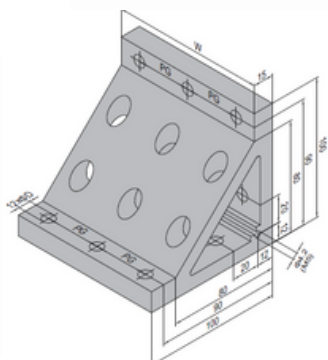

Application	Description	D (mm)	W (mm)	PG (mm)	Fastening Set	Machining Code	Mass (g)	Part No.
PG40 160mm 	100-40-160 (pcs)	9	150	40			1127	3.31.100.40.160
	100-40-160 (set)	9	150	40	8x W +8x J		1543	3.31.100.40.160.SET
	100-40-160 (M5)	9	150	40		M5	1127	3.31.100.40.160.M5
	100-40-160 (M5 set)	9	150	40	8x W +8x J +1x P	M5	1545	3.31.100.40.160.M5.SET
PG45 180mm 	100-45-180 (pcs)	9	170	45			1293	3.31.100.45.180
	100-45-180 (set)	9	170	45	8x W +8x J		1709	3.31.100.45.180.SET
	100-45-180 (M5)	9	170	45		M5	1293	3.31.100.45.180.M5
	100-45-180 (M5 set)	9	170	45	8x W +8x J +1x P	M5	1711	3.31.100.45.180.M5.SET

Application	Description	D (mm)	W (mm)	PG (mm)	Fastening Set	Machining Code	Mass (g)	Part No.
PG40 120mm 	100-40-120 (pcs)	9	110	40			824	3.31.100.40.120
	100-40-120 (set)	9	110	40	6x W +6x J		1136	3.31.100.40.120.SET
	100-40-120 (M5)	9	110	40		M5	824	3.31.100.40.120.M5
	100-40-120 (M5 set)	9	110	40	6x W +6x J +6x P	M5	1138	3.31.100.40.120.M5.SET

100x100x15



Application	Description	D (mm)	W (mm)	PG (mm)	Fastening Set	Machining Code	Mass (g)	Part No.
PG40 200mm 	100-40-200 (pcs)	9	190	40			1477	3.31.100.40.200
	100-40-200 (set)	9	190	40	10x W +10x J		1893	3.31.100.40.200.SET
	100-40-200 (M5)	9	190	40		M5	1477	3.31.100.40.200.M5
	100-40-200 (M5 set)	9	190	40	10x W +10x J +1x P	M5	1895	3.31.100.40.200.M5.SET

P	Fastening Set	W	Fastening Set	J	Fastening Set	M5	Fastening Set
	M5x10 Bolt		M8x30 Bolt		M8x25 Bolt		M5x10 Bolt
	M5 Washer		M8 Spring Washer		M8 Spring Washer		M8 Washer
			M8 Washer		M8 T Nut		
			M8 T Nut				

Inner Bracket

Elementos de unión








Material: Bracket-die cast zinc






El tornillo interno es de bajo costo y gran eficiencia.
Comúnmente usado para el ensamble de puertas,
ventanas y marcos de protección

Inner bracket is with low cost and high efficiency,
widely used for the assembly of door, window and
protection frame.




6-A 3.41.06A
6-B 3.41.06B

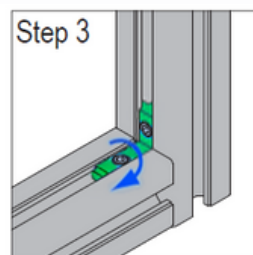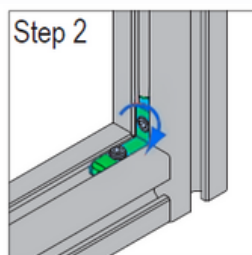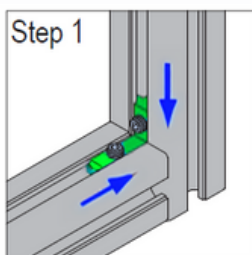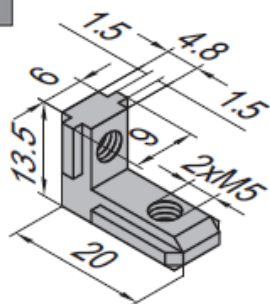


8-A 3.41.08A
8-B 3.41.08B

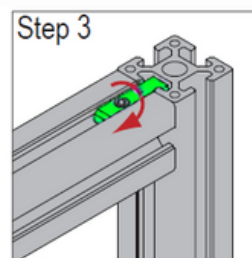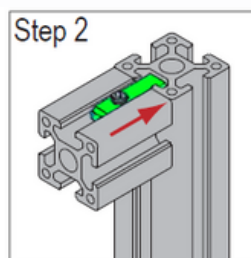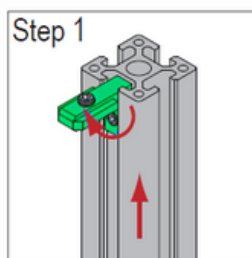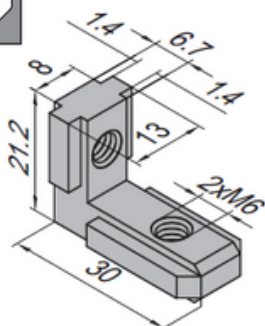

10-A 3.41.010A
10-B 3.41.010B



Description	Mass (g/pcs)	Part No.
Inner Bracket-6-A (with top thread)	6	3.41.06A
Inner Bracket-6-B (with top thread)	6	3.41.06B
Inner Bracket-8-A (with top thread)	18	3.41.08A
Inner Bracket-8-B (with top thread)	18	3.41.08B
Inner Bracket-10-A (with top thread)	36	3.41.10A
Inner Bracket-10-B (with top thread)	36	3.41.10B

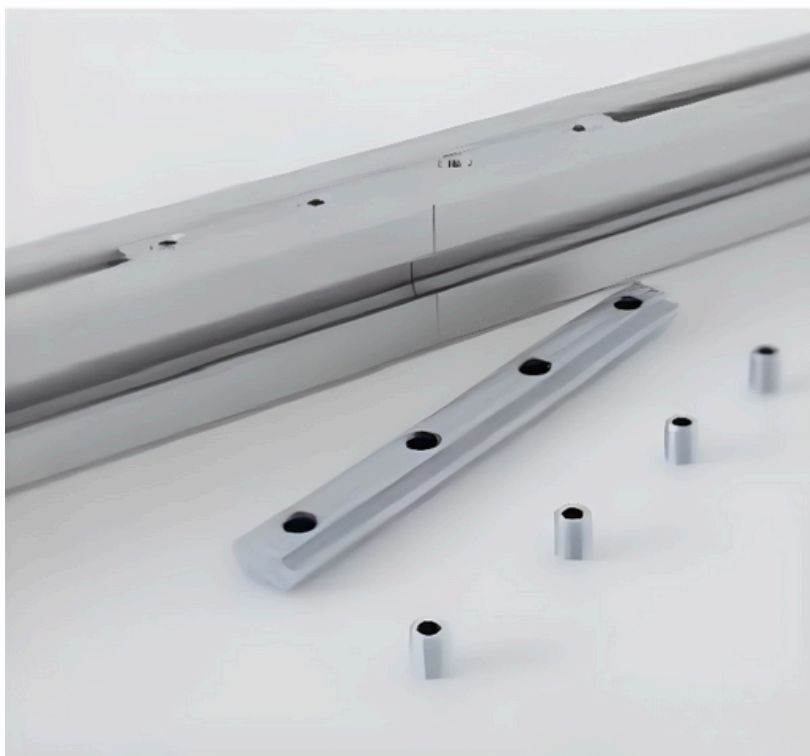


Material: Zinc plated Steel


El tornillo lineal es otra opción de conexión entre perfiles. Ofrece poca fuerza pero va escondido en la ranura.

Linear connection between profiles. Low strength, hidden in slot


Linear Bar Connector-6

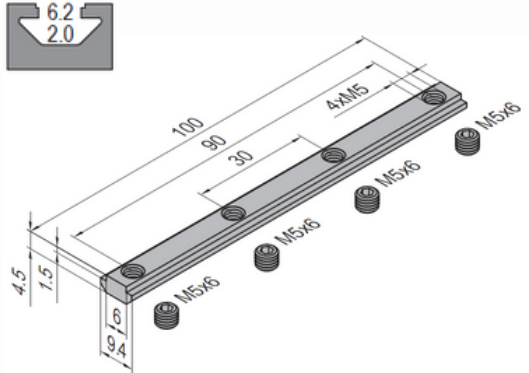

Linear Bar Connector-8

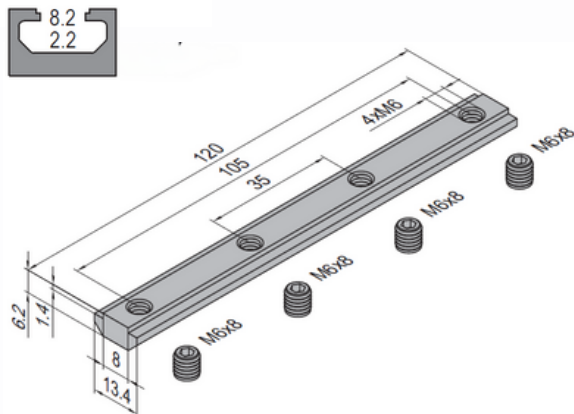

Linear Bar Connector-10

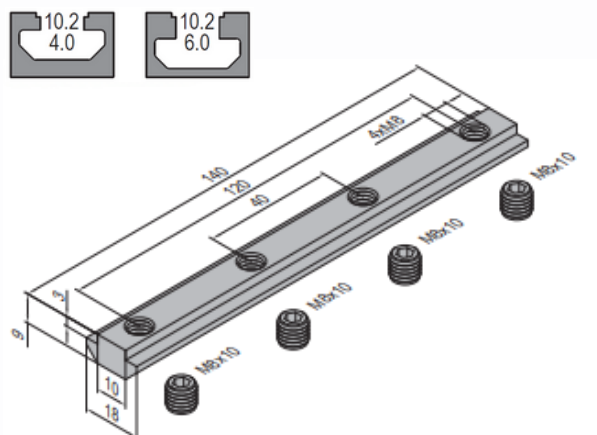

Description	Mass (g/pcs)	Part No.
Linear Bar Connector-6 (with top thread)	27	3.51.06
Linear Bar Connector-8 (with top thread)	65	3.51.08
Linear Bar Connector-10(with top thread)	132	3.51.10




Joining Plate

Elementos de unión




Material: Zinc plated Steel


PG30-3030-01

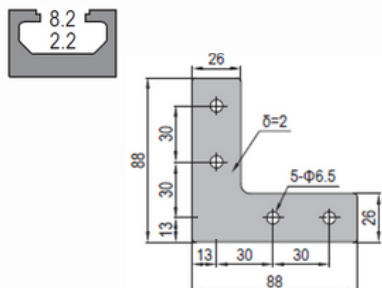

PG30-3030-02


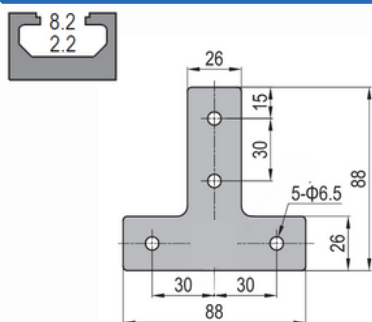


PG30-3030-03

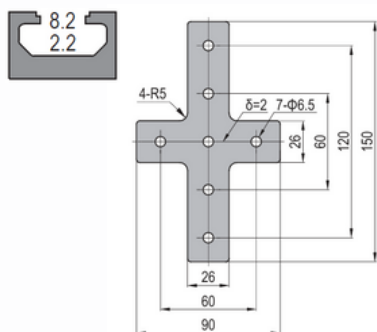


Description	Fastening Set	Mass (g/pcs)	Part No.
PG30-3030-01 (pcs)		58	3.53.30.3030.01
PG30-3030-01 (set A)	4x PG	92	3.53.30.3030.01.SETA
PG30-3030-01 (set B)	4x PH	112	3.53.30.3030.01.SETB
PG30-3030-02 (pcs)		58	3.53.30.3030.02
PG30-3030-02 (set A)	4x PG	92	3.53.30.3030.02.SETA
PG30-3030-02 (set B)	4x PH	112	3.53.30.3030.02.SETB
PG30-3030-03 (pcs)		83	3.53.30.3030.03
PG30-3030-03 (set A)	7x PG	130	3.53.30.3030.03.SETA
PG30-3030-03 (set B)	7x PH	158	3.53.30.3030.03.SETB


PG40-4040-01



PG40-4040-02



PG40-4040-03

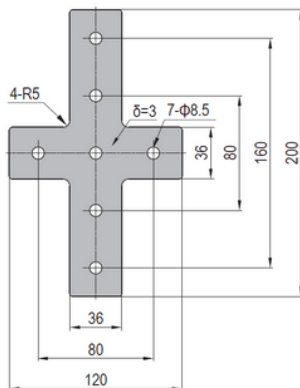


Description	Fastening Set	Mass (g/pcs)	Part No.
PG40-4040-01 (pcs)		147	3.53.40.4040.01
PG40-4040-01 (set X)	4xX	217	3.53.40.4040.01.SETX
PG40-4040-01 (set Y)	4xY	257	3.53.40.4040.01.SETY
PG40-4040-02 (pcs)		149	3.53.40.4040.02
PG40-4040-02 (set X)	4xX	219	3.53.40.4040.02.SETX
PG40-4040-02 (set Y)	4xY	259	3.53.40.4040.02.SETY
PG40-4040-03 (pcs)		230	3.53.40.4040.03
PG40-4040-03 (set X)	7xX	328	3.53.40.4040.03.SETX
PG40-4040-03 (set Y)	7xY	384	3.53.40.4040.03.SETY


Más vendido

X	Fastening Set	Y	Fastening Set
	M8x12 Bolt		M8x12 Bolt
	M8 Spring Washer		M8 Spring Washer
	M8 T Nut		M8 Pre-set Nut


PG40-4040-04

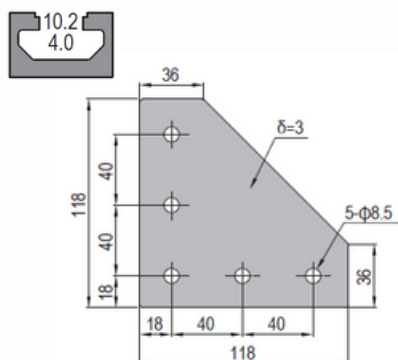

PG40-4040-05

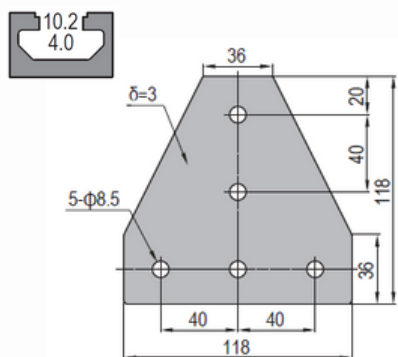



PG40-4040-06

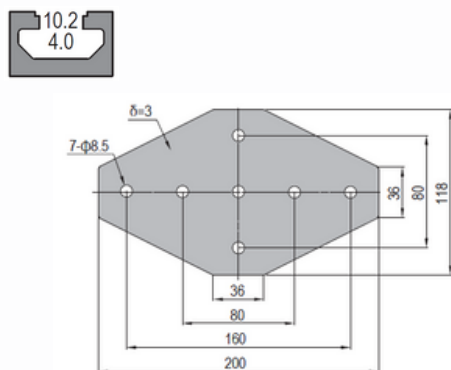


Description	Fastening Set	Mass (g)	Part No.
PG40-4040-04 (pcs)		222	3.53.40.4040.04
PG40-4040-04 (set X)	5xX	292	3.53.40.4040.04.SETX
PG40-4040-04 (set Y)	5xY	332	3.53.40.4040.04.SETY
PG40-4040-05 (pcs)		220	3.53.40.4040.05
PG40-4040-05 (set X)	5xX	290	3.53.40.4040.05.SETX
PG40-4040-05 (set Y)	5xY	330	3.53.40.4040.05.SETY
PG40-4040-06 (pcs)		355	3.53.40.4040.06
PG40-4040-06 (set X)	7xX	453	3.53.40.4040.06.SETX
PG40-4040-06 (set Y)	7xY	510	3.53.40.4040.06.SETY

X	Fastening Set	Y	Fastening Set
	M8x12 Bolt		M8x12 Bolt
	M8 Spring Washer		M8 Spring Washer
	M8 T Nut		M8 Pre-set Nut


PG40-4080-01

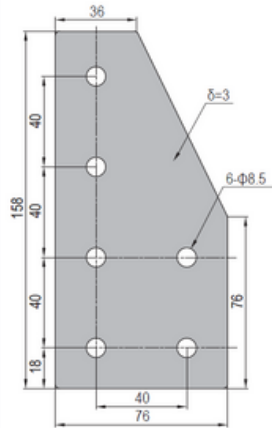

PG40-4080-02

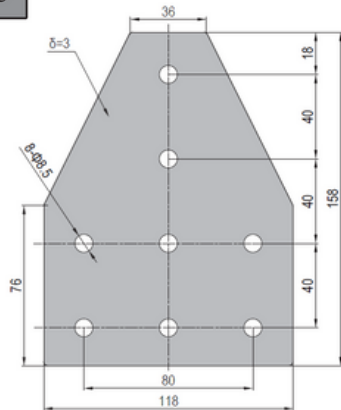

PG40-4080-03

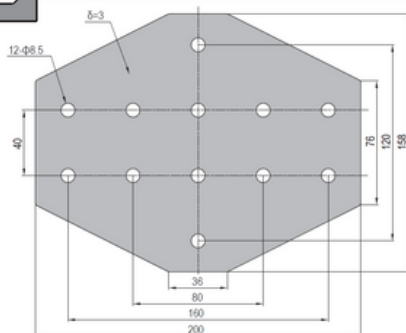


Description	Fastening Set	Mass (g)	Part No.
PG40-4080-01 (pcs)		222	3.53.40.4080.01
PG40-4080-01 (set X)	6xX	306	3.53.40.4080.01.SETX
PG40-4080-01 (set Y)	6xY	354	3.53.40.4080.01.SETY
PG40-4080-02 (pcs)		347	3.53.40.4080.02
PG40-4080-02 (set X)	8xX	459	3.53.40.4080.02.SETX
PG40-4080-02 (set Y)	8xY	523	3.53.40.4080.02.SETY
PG40-4080-03 (pcs)		523	3.53.40.4080.03
PG40-4080-03 (set X)	12xX	691	3.53.40.4080.03.SETX
PG40-4080-03 (set Y)	12xY	787	3.53.40.4080.03.SETY




X	Fastening Set	Y	Fastening Set
	M8x12 Bolt		M8x12 Bolt
	M8 Spring Washer		M8 Spring Washer
	M8 T Nut		M8 Pre-set Nut


PG40-8080-01

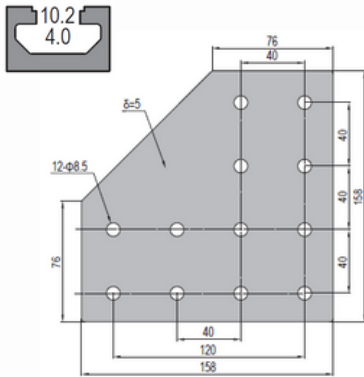

PG40-8080-02

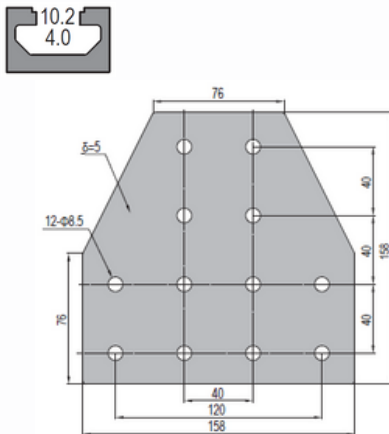


PG40-8080-03

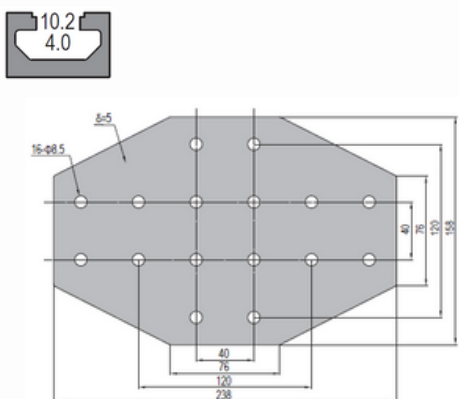


Description	Fastening Set	Mass (g)	Part No.
PG40-8080-01 (pcs)		730	3.53.40.8080.01
PG40-8080-01 (set I)	12xI	910	3.53.40.8080.01.SETX
PG40-8080-01 (set O)	12xO	1006	3.53.40.8080.01.SETY
PG40-8080-02 (pcs)		731	3.53.40.8080.02
PG40-8080-02 (set I)	12xI	911	3.53.40.8080.02.SETX
PG40-8080-02 (set O)	12xO	1007	3.53.40.8080.02.SETY
PG40-8080-03 (pcs)		1043	3.53.40.8080.03
PG40-8080-03 (set I)	16xI	1283	3.53.40.8080.03.SETX
PG40-8080-03 (set O)	16xO	1411	3.53.40.8080.03.SETY

I Fastening Set	O Fastening Set
M8x16 Bolt	M8x16 Bolt
M8 Spring Washer	M8 Spring Washer
M8 T Nut	M8 Pre-set Nut


10.2
6.0



A cross-sectional diagram of a U-shaped channel. The channel has a flat bottom and vertical side walls. The total width of the channel at the top is labeled as 10.2. The depth of the channel from the top edge to the bottom is labeled as 6.0.

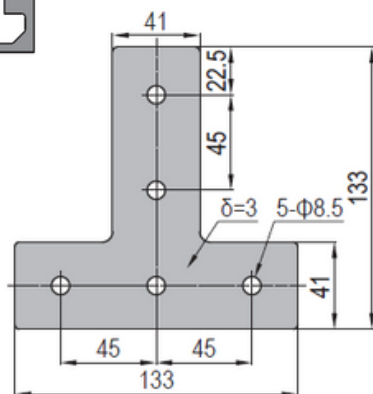

A cross-sectional view of a U-shaped channel. The top horizontal surface is labeled with the dimension 10.2. The vertical side wall is labeled with the dimension 6.0.

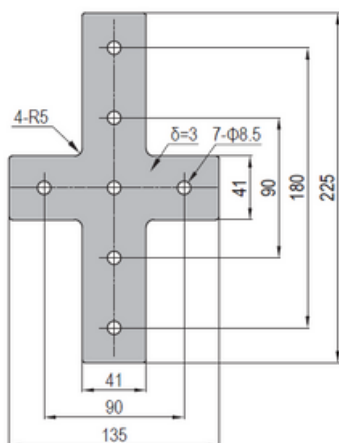


Description	Fastening Set	Mass (g)	Part No.
PG45-4545-01 (pcs)		209	3.53.45.4545.01
PG45-4545-01 (set I)	5x I	288	3.53.45.4545.01.SETI
PG45-4545-01 (set O)	5x O	328	3.53.45.4545.01.SETO
PG45-4545-02 (pcs)		209	3.53.45.4545.02
PG45-4545-02 (set I)	5x I	288	3.53.45.4545.02.SETI
PG45-4545-02 (set O)	5x O	328	3.53.45.4545.02.SETO
PG45-4545-03 (pcs)		297	3.53.45.4545.03
PG45-4545-03 (set I)	7x I	408	3.53.45.4545.03.SETI
PG45-4545-03 (set O)	7x O	464	3.53.45.4545.03.SETO

I	Fastening Set	O	Fastening Set
	M8x16 Bolt		M8x16 Bolt
	M8 Spring Washer		M8 Spring Washer
	M8 T Nut		M8 Pre-set Nut

Butt Connector


Elementos de unión

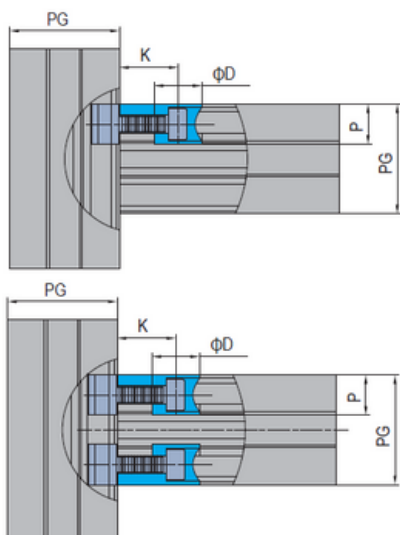


Material: Zinc alloy, nickel plated

El conector interno es comúnmente utilizado en cuarto limpio.


Butt connector is used for profile affiliating connection and widely used in clean room.

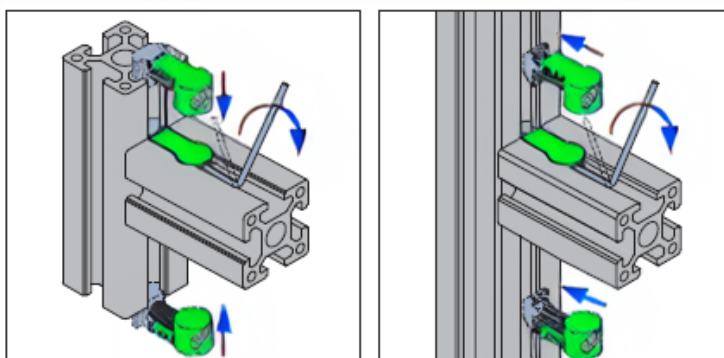







Butt Connector-8

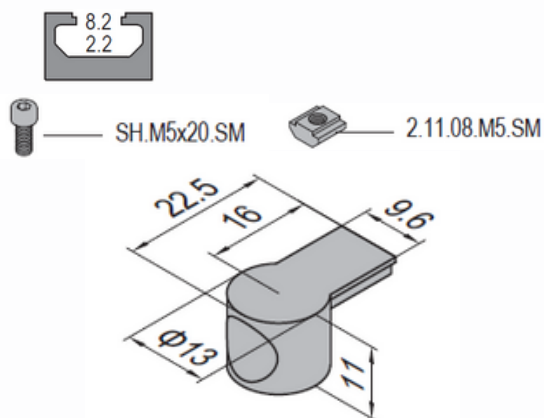

Butt Connector-10

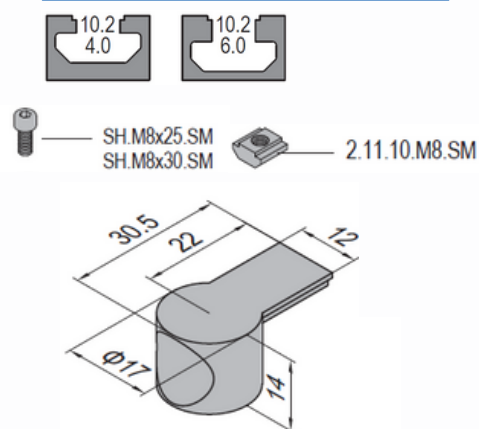

Description	PG	K (mm)	D (mm)	P (mm)	Fastening Set	Mass (g)	Part No.
Butt Connector-8 (pcs)	PG30	16	13	11		9	3.61.08
Butt Connector-8 (set A)	PG30	16	13	11	1xQ	20	3.61.08.SETA
Butt Connector-8 (set B)	PG30	16	13	11	1xPG	18	3.61.08.SETB
Butt Connector-10 (pcs)	PG40/PG45/PG50/PG60	22	17	14		15	3.61.10
Butt Connector-10-4 (set A)	PG40	22	17	14	1xT	41	3.61.10.04.SETA
Butt Connector-10-4 (set B)	PG40	22	17	14	1xCD	37	3.61.10.04.SETB
Butt Connector-10-6 (set A)	PG45/PG50/PG60	22	17	14	1xS	43	3.61.10.06.SETA
Butt Connector-10-6 (set B)	PG45/PG50/PG60	22	17	14	1xCE	39	3.61.10.06.SETB



End Connector


Elementos de unión





Material: Nickel plated steel

También llamado conector de mariposa por su forma, puede esconderse completamente dentro del perfil, por esto es comúnmente usado para cuarto limpio.


End connector is also called butterfly connector due to its shape, which can hide itself completely in aluminium profile. It is widely used for frame structures in clean room.

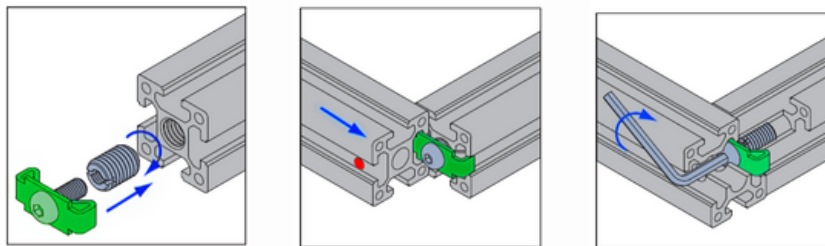

End Connector-8

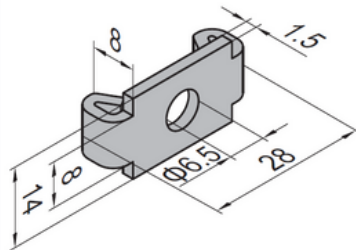

End Connector-10

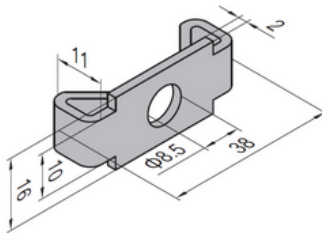


Description	PG	Fastening Set	Mass (g)	Part No.
End Connector-8 (pcs)	PG30		7	3.71.30
End Connector-8 (set)	PG30	1x FA	23	3.71.30.SET
End Connector-10 (pcs)	PG40		13	3.71.40
End Connector-10 (set)	PG40	1x FB	38	3.71.40.SET

FA	Fastening Set	FB	Fastening Set
	M6x20 Bolt		M8x20 Bolt
	M12-M6 Hole Reducer Bolt		M14-M8 Hole Reducer Bolt

Screw Connector



Elementos de unión

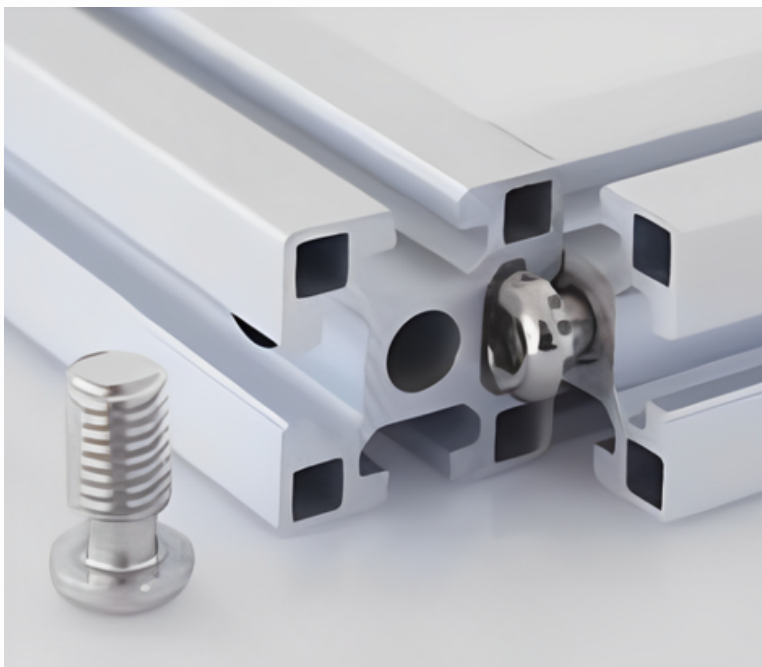



Material: Nickel plated steel

Una manera simple y económica de remplazar al End connector con una conexión más confiable.


A simple and economic way to replace end connector with more connection reliability.




Screw Connector-6



Screw Connector-8



Screw Connector-10



Requiere hacer roscas internas previamente

Description	Mass (g)	Part No.
Screw Connector-6	7	3.81.06
Screw Connector-8	17	3.81.08
Screw Connector-10	31	3.81.10
Direct replacement for Screw Connector-6	7	BH.M08.16

Autorroscable. No requiere rosca previa.


Description	Mass (g)	Part No.
Self tapping Bolt - 8	19	3.82.08
Self tapping Bolt - 10	35	3.82.10

Cubic Connector




Elementos de unión






Material: Connector- Die cast aluminium
Cap- Black ABS

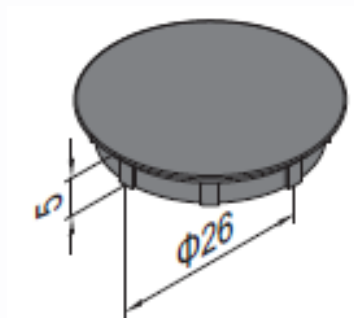

Cubic Connector-4545-2





Cubic Connector-4545-3




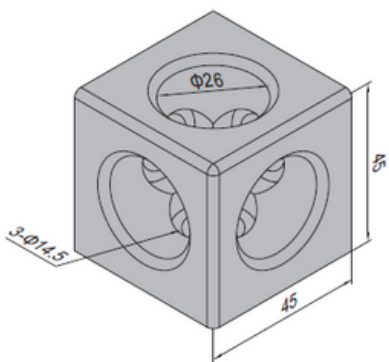



Description	Fastening Set	Cap (pcs)	Mass (g)	Part No.
Cubic Connector-4545-2 (pcs)		2	135	3.91.4545.02
Cubic Connector-4545-2 (set)	2x(M14x25)	2	201	3.91.4545.02.SET
Cubic Connector-4545-3(pcs)		3	135	3.91.4545.03
Cubic Connector-4545-3 (set)	3x(M14x25)	3	234	3.91.4545.03.SET




Conector 3 entradas



Cap-01



Cap-02




Description	a	b	D	Fastening Set	Cap (pcs)	Mass (g)	Part No.
2020-01 (pcs)	18.5	20	6.5		1	11	3.92.2020.01
2020-01 (set)	18.5	20	6.5	3xDY	1	23	3.92.2020.01.SET
2020-02 (pcs)	18.5	20	6.5		1	12	3.92.2020.02
2020-02 (set)	18.5	20	6.5	3xDY	1	24	3.92.2020.02.SET
3030-01 (pcs)	28	30	6.5		1	35	3.92.3030.01
3030-01 (set)	28	30	6.5	3xCW	1	105	3.92.3030.01.SET
3030-02 (pcs)	28	30	6.5		1	38	3.92.3030.02
3030-02 (set)	28	30	6.5	3xCW	1	108	3.92.3030.02.SET
4040-01 (pcs)	38	40	8.5		1	87	3.92.4040.01
4040-01 (set)	38	40	8.5	3xFI	1	159	3.92.4040.01.SET
4040-02 (pcs)	38	40	8.5		1	92	3.92.4040.02
4040-02 (set)	38	40	8.5	3xFI	1	164	3.92.4040.02.SET
4545-01 (pcs)	42	45	8.5		1	114	3.92.4545.01
4545-01 (set)	42	45	8.5	3xFI	1	187	3.92.4545.01.SET
4545-02 (pcs)	42	45	8.5		1	123	3.92.4545.02
4545-02 (set)	42	45	8.5	3xFI	1	196	3.92.4545.02.SET

DY Fastening Set



M6x16 Bolt


CW Fastening Set



M6x20 Bolt

M12-M6
Hole Reducer Bolt

FI Fastening Set



M8x20 Bolt

M14-M8
Hole Reducer Bolt

ACCESORIOS DE PERFIL




End Cap

T slot Cover

End Cap



Accesorios de Perfil

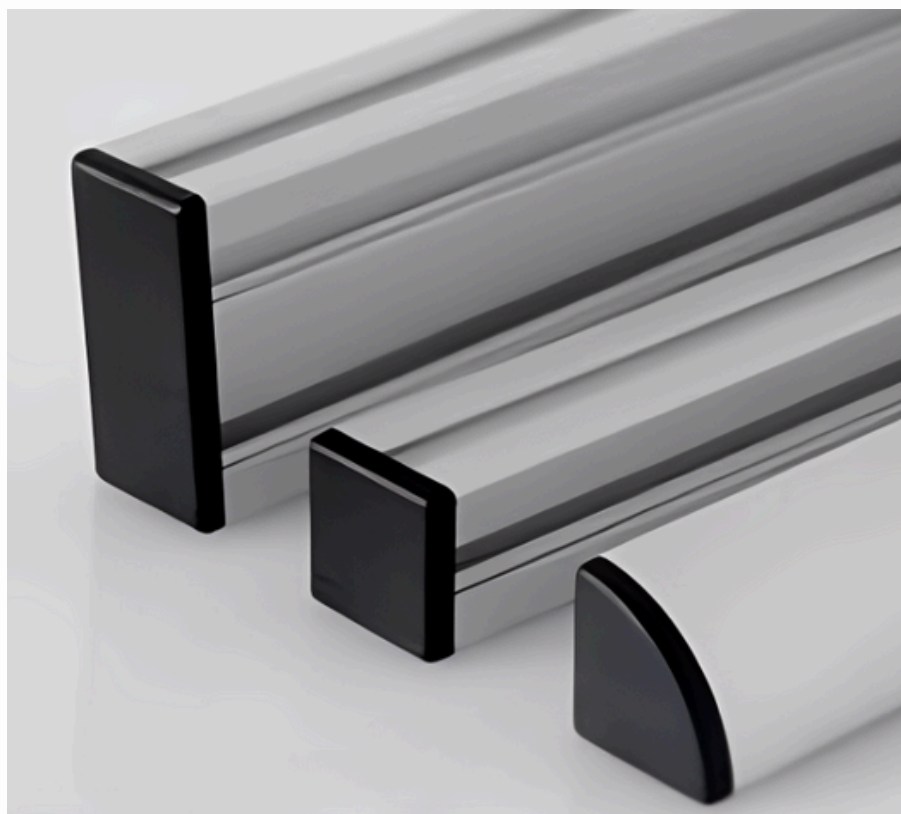


Material: Back ABS

Previene que el personal sufra alguna lesión y mejora la apariencia de las orillas del perfil.


To prevent staff from any injury and improve profile end appearance

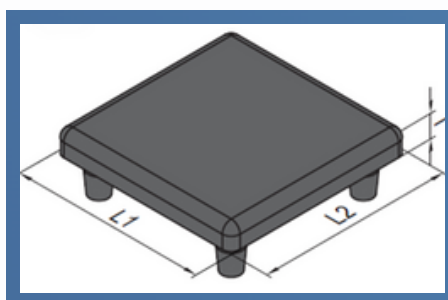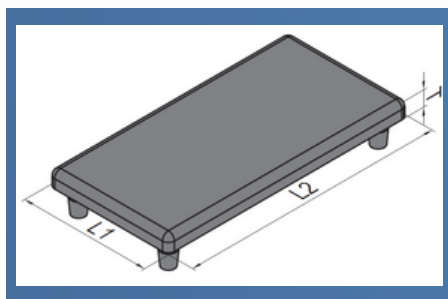


Description	L1 (mm)	L2 (mm)	T (mm)	Mass (g)	Part No.	
End Cap-PG15-1515	15	15	3	1	4.11.15.1515	
End Cap-PG15-1530	15	30	3	1.1	4.11.15.1530	
End Cap-PG20-2020	20	20	4	2	4.11.20.2020	Más vendido
End Cap-PG20-2040	20	40	4	3	4.11.20.2040	Más vendido
End Cap-PG20-2060	20	60	4	4	4.11.20.2060	
End Cap-PG20-2080	20	80	4	5	4.11.20.2080	
End Cap-PG20-4040	40	40	4	6	4.11.20.4040	
End Cap-PG30-3030	30	30	5	3	4.11.30.3030	Más vendido
End Cap-PG30-3060	30	60	5	8	4.11.30.3060	Más vendido
End Cap-PG30-3090	30	90	5	11	4.11.30.3090	
End Cap-PG30-30120	30	120	5	14	4.11.30.30120	
End Cap-PG30-6060	60	60	5	15	4.11.30.6060	
End Cap-PG30-60120	60	120	5	33	4.11.30.60120	
End Cap-PG40-4040	40	40	5	6	4.11.40.4040	Más vendido
End Cap-PG40-4060	40	60	5	9	4.11.40.4060	
End Cap-PG40-4080	40	80	5	13	4.11.40.4080	Más vendido
End Cap-PG40-40120	40	120	5	18	4.11.40.40120	
End Cap-PG40-40160	40	160	5	24	4.11.40.40160	
End Cap-PG40-8080	80	80	5	22	4.11.40.8080	
End Cap-PG40-80120	80	120	5	43	4.11.40.80120	
End Cap-PG40-80160	80	160	5	58	4.11.40.80160	
End Cap-PG40-80200	80	200	5	72	4.11.40.80200	
End Cap-PG40-120120	120	120	5	64	4.11.40.120120	
End Cap-PG45-4545	45	45	5	8	4.11.45.4545	Más vendido
End Cap-PG45-4560	45	60	5	11	4.11.45.4560	
End Cap-PG45-4590	45	90	5	16	4.11.45.4590	
End Cap-PG45-9090	90	90	5	28	4.11.45.9090	Más vendido
End Cap-PG45-90180	90	180	5	72	4.11.45.90180	
End Cap-PG50-5050	50	50	5	10	4.11.50.5050	
End Cap-PG50-50100	50	100	5	18	4.11.50.50100	
End Cap-PG50-100100	100	100	5	44	4.11.50.100100	
End Cap-PG60-6060	60	60	5	14	4.11.60.6060	

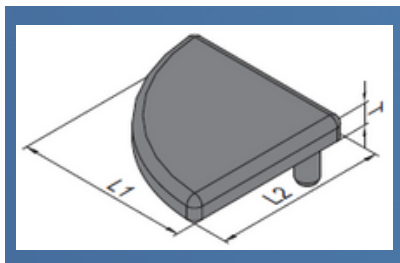


Description	L1 (mm)	L2 (mm)	T (mm)	Mass (g)	Part No.
End Cap-PG20-2020R	20	20	4	1	4.11.20.2020R
End Cap-PG30-3030R	30	30	5	3	4.11.30.3030R
End Cap-PG40-4040R	40	40	5	6	4.11.40.4040R
End Cap-PG45-4545R	45	45	5	7	4.11.45.4545R

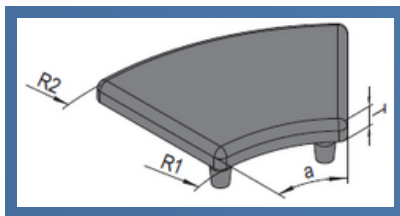


Description	R1 (mm)	R2 (mm)	a	T (mm)	Mass (g)	Part No.
End Cap-PG30-3030R45	30	60	45°	5	4	4.11.30.3030R45
End Cap-PG40-4040R45	40	80	45°	5	7	4.11.40.4040R45
End Cap-PG405-4545R45	45	90	45°	5	9	4.11.45.4545R45

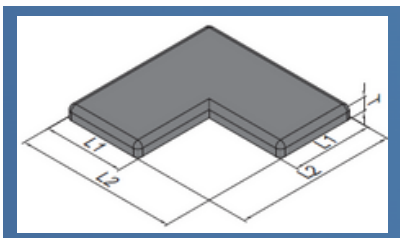

Description	L1 (mm)	L2 (mm)	T (mm)	Mass (g)	Part No.
End Cap-PG30-6060L	30	60	5	11	4.11.30.6060L
End Cap-PG40-8080L	40	80	5	17	4.11.40.8080L
End Cap-PG45-9090L	45	90	5	22	4.11.45.9090L

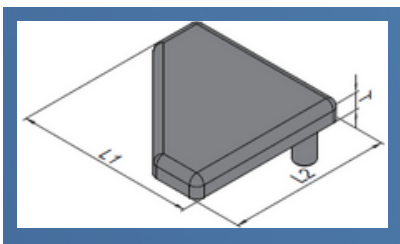


Description	L1 (mm)	L2 (mm)	T (mm)	Mass (g)	Part No.
End Cap-PG40-4040T	40	40	5	5.3	4.11.40.4040T

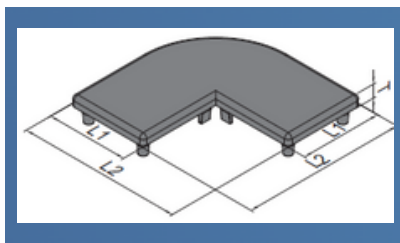


Description	L1 (mm)	L2 (mm)	T (mm)	Mass (g)	Part No.
End Cap-PG40-8080R	40	80	5	17	4.11.40.8080R


Conduit Cap 40x40




Conduit Cap 40x80

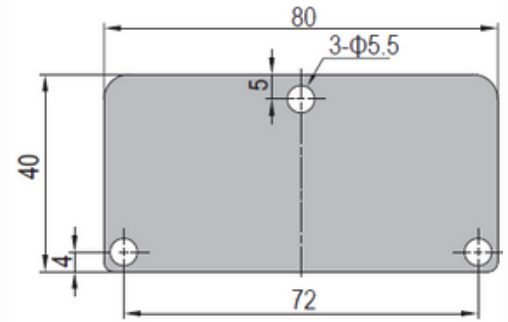


Conduit Cap 60x120

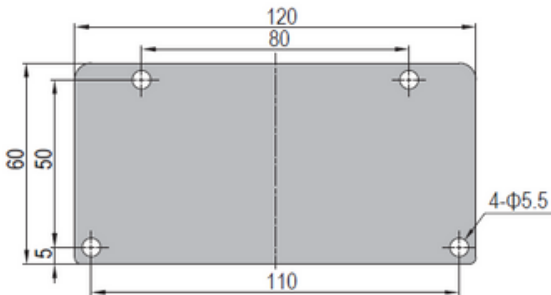


Conduit Cap 80x80

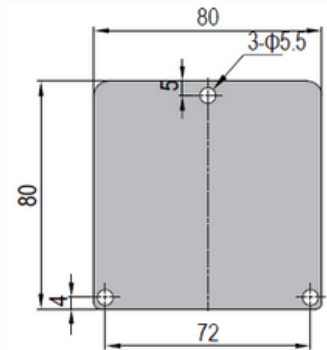


Conduit Cap 80x160

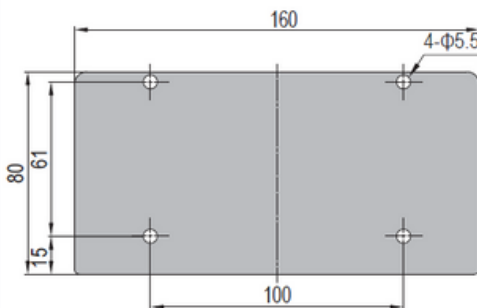

Conduit Cap 80x200

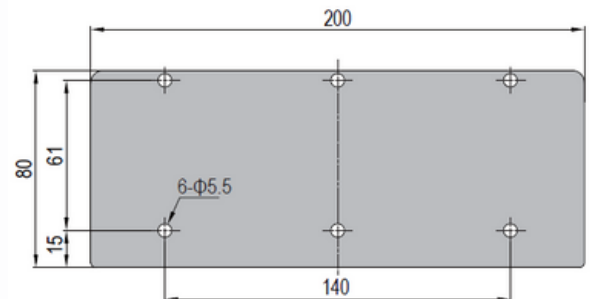


Description	Thickness T (mm)	Fastening Set	Mass (g)	Part No.
Cubic Connector-4545-2 (pcs)	2		24.5	4.14.40.4040
Cubic Connector-4545-2 (set)	2	3x EU	29	4.14.40.4040.SET
Cubic Connector-4545-2(pcs)	2		50	4.14.40.4080
Cubic Connector-4545-3 (set)	2	3x EV	59	4.14.40.4080.SET
Cubic Connector-4545-2 (pcs)	2		113	4.14.40.60120
Cubic Connector-4545-2 (set)	2	4x EV	125	4.14.40.60120.SET
Cubic Connector-4545-2 (pcs)	2		99	4.14.40.8080
Cubic Connector-4545-2 (set)	2	3x EV	108	4.14.40.8080.SET
Cubic Connector-4545-2 (pcs)	2		203	4.14.40.80160
Cubic Connector-4545-2 (set)	2	4x EV	215	4.14.40.80160.SET
Cubic Connector-4545-2 (pcs)	2		247	4.14.40.80200
Cubic Connector-4545-2 (set)	2	6x EV	265	4.14.40.80200.SET



T slot Cover

Accesorios de Perfil

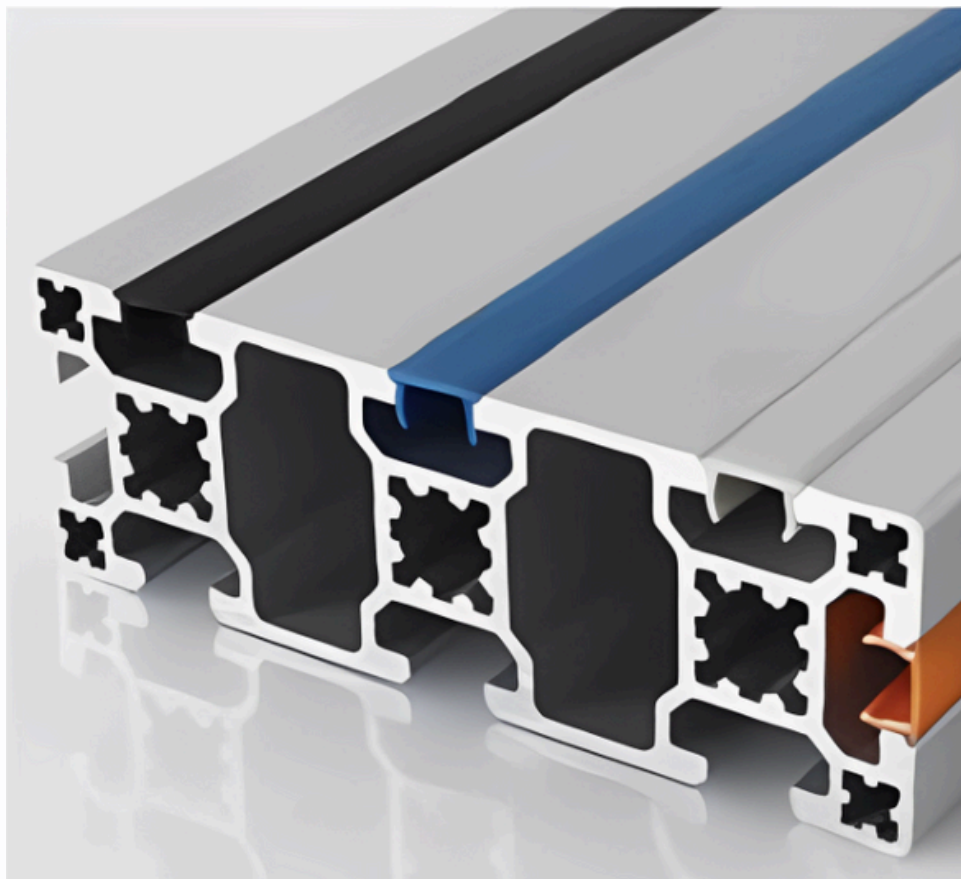


Material: PP Black/blue/grey/orange


Previene que la ranura se contamine y mejora la apariencia de las orillas del perfil.

To prevent slot from contamination and improve structure appearance


T slot Cover-6




T slot Cover-8



T slot Cover-10



Profile Cover 40x40

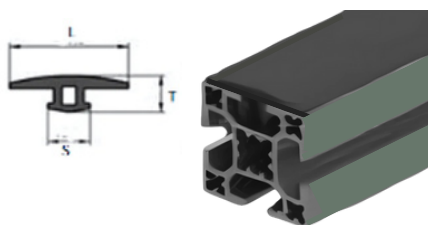

Description	Color	Mass (g)	Delivery Length	Part No.
T Slot Cover-6	Black	11	200mm/bar	4.21.06.BK
T Slot Cover-6	Blue	11		4.21.06.BE
T Slot Cover-6	Gray	11		4.21.06.GY
T Slot Cover-6	Orange	11		4.21.06.SE
T Slot Cover-8	Black	22		4.02.08.BK 
T Slot Cover-8	Blue	22		4.21.08.BE
T Slot Cover-8	Gray	22		4.02.08.GY 
T Slot Cover-8	Orange	22		4.21.08.SE
T Slot Cover-8	Black			4.21.08.BK 
T Slot Cover-10	Black	38		4.21.10.BK 
T Slot Cover-10	Blue	38	100mm/bar	4.21.10.BE
T Slot Cover-10	Gray	38		4.21.10.GY 
T Slot Cover-10	Orange	38		4.21.10.SE
T Slot Cover-10	Yellow	38		4.21.10.YW 
Profile Cover 40x40	Black	38		40.4.02.05.01 

ELEMENTOS DE PISO



Base Plate
Leveling Foot
Mounting Plate
Castor Plate
Castor
Base Angle
L Base
Foot and Castor Components
Leveling Castor

Base Plate


Elementos de Piso





Material: Cast steel, black electrophoresis

Para apoyar el perfil estructural en la base. Usa tornillos de expansión para atornillarse al suelo y ofrecer una mayor estabilidad.



To support strut profile at the bottom. Expansion bolts chocked into floor can offer a high stability.

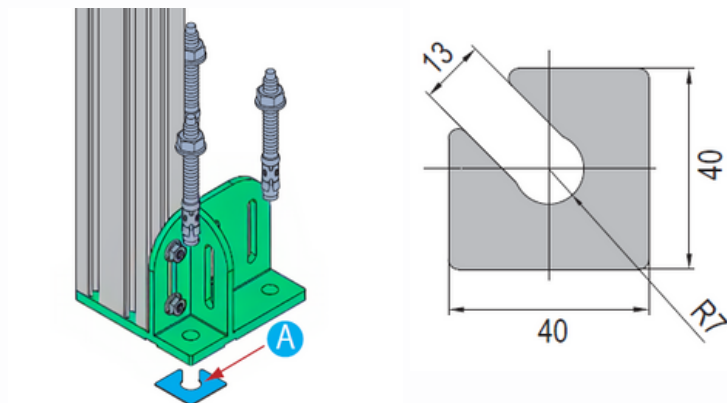



Base Plate-4080

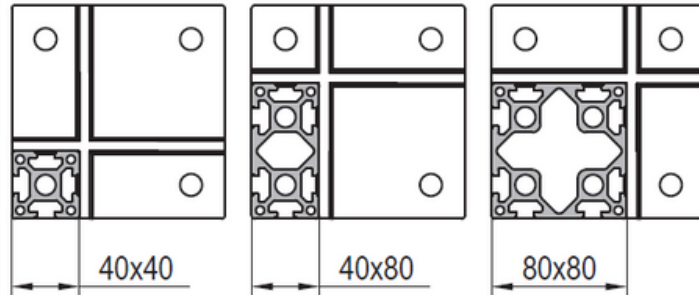
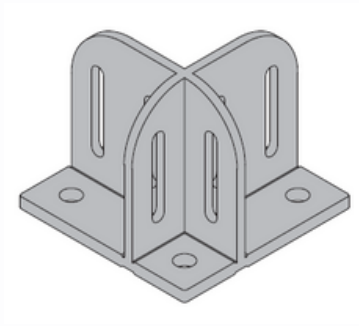


Base Plate-4560


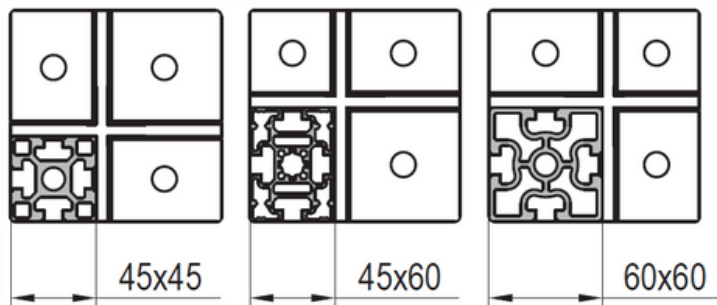
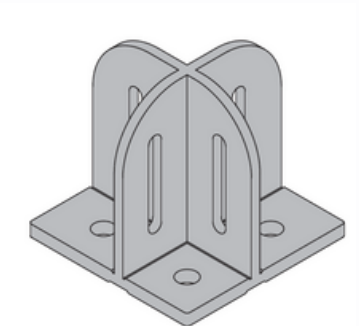


Base Plate-4590

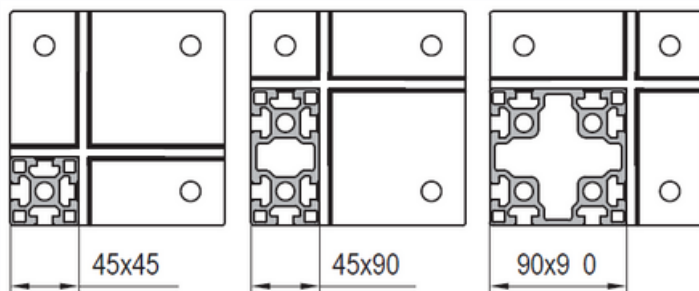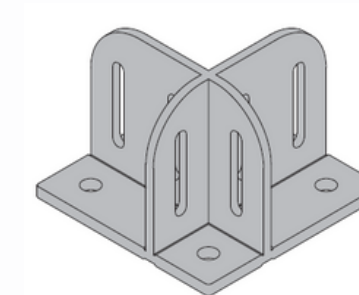

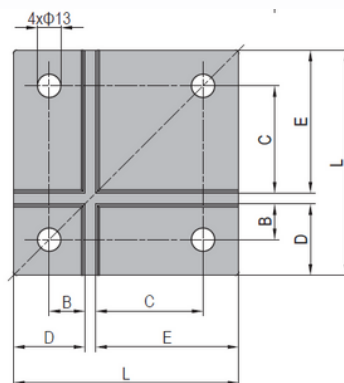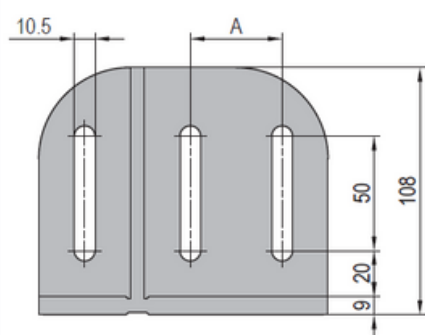

Description	L (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Fastening Set	Mass (g)	Part No.
Base Plate-4080 (pcs)	126	40	20	60	40	80	2x AZ	1930	5.11.4080
Base Plate-4080 (set A)	126	40	20	60	40	80	4xC+3xAA+2x AZ	2240	5.11.4080.SETA
Base Plate-4080 (set B)	126	40	20	60	40	80	6xC+3xAA+2x AZ	2290	5.11.4080.SETB
Base Plate-4080 (set C)	126	40	20	60	40	80	8xC+3xAA+2x AZ	2340	5.11.4080.SETC
Base Plate-4560 (pcs)	111		22.5	30	45	60	2x AZ	1600	5.11.4560
Base Plate-4560 (set)	111		22.5	30	45	60	4xC+3xAA+2x AZ	1910	5.11.4560.SET
Base Plate-4590 (pcs)	141	45	22.5	67.5	45	90	2x AZ	2330	5.11.4590
Base Plate-4590 (set A)	141	45	22.5	67.5	45	90	4xC+3xAA+2x AZ	2640	5.11.4590.SETA
Base Plate-4590 (set B)	141	45	22.5	67.5	45	90	6xC+3xAA+2x AZ	2690	5.11.4590.SETB
Base Plate-4590 (set C)	141	45	22.5	67.5	45	90	8xC+3xAA+2x AZ	2740	5.11.4590.SETC
Base Plate Gasket								9	5.11.01



Base Plate

Elementos de Piso




Material: Cast steel, black electrophoresis


Para apoyar el perfil estructural montado en el piso o entre plataformas. Usa tornillos de expansión para atornillarse al suelo y ofrecer una mayor estabilidad.

To support strut profile mounted on the floor or between the platforms. Expansion bolts chocked into floor can offer a high stability.


Base Plate-4080

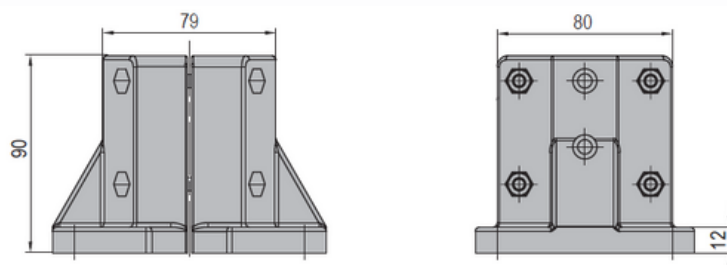

Base Plate-4560

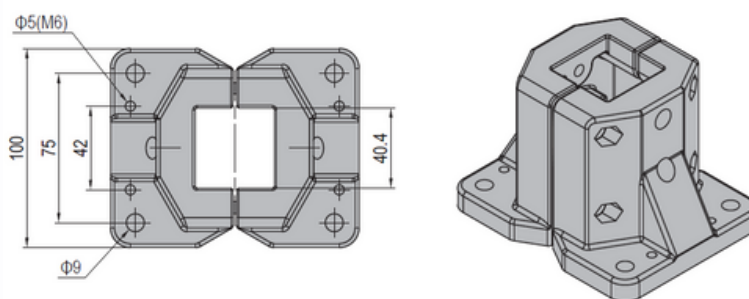

Base Plate-4590

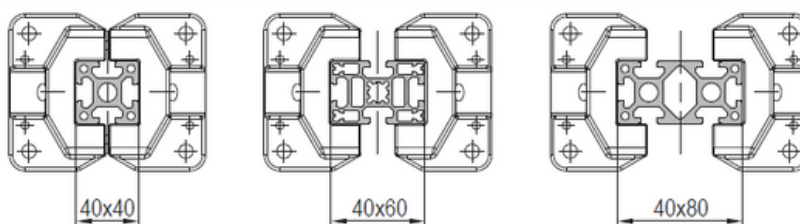

Description	Fastening Set	Mass (g)	Part No.
Base Plate-4080 (set)	4x DT	975	5.12.40.SET

DT	Fastening Set
	M6x20 Bolt
	M6 Spring Washer
	M6 Pre-set Nut

Leveling Foot/ Pivot Foot

Elementos de Piso




Material: Base-black PA6
Spindle- Zinc plated steel
Pad- Black rubber

Para apoyar estructuras donde requerirá ajustes graduales de altura, el pie con pivote tiene un pequeño ángulo para arreglar la altura en pisos desnivelados. La conexión entre la base del pivote y la tuerca puede ser liberada con herramienta

To support structure where gradual height adjustment is needed, the pivot foot has a small swiveling angle to fit slightly uneven floor. The connection between the pivot base and the spindle can be released with a tool.

Pivot Foot

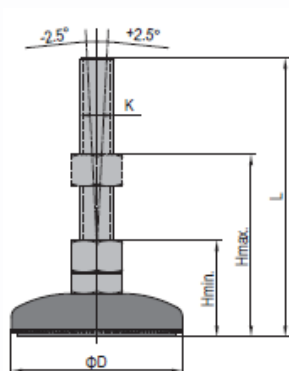

Description	D (mm)	KxL (mm)	H min. (mm)	H max. (mm)	Max. Static Load (N)	Mass (g)	Part No.
Pivot Foot-PA 6 Base	59	M12x90	45	70	4500	152	5.21.60.12.90
Pivot Foot-PA 6 Base	59	M14x130	45	100	7000	220	5.21.60.14.130
Pivot Foot-PA 6 Base	79	M12x90	45	70	9000	188	5.21.80.12.90
Pivot Foot-PA 6 Base	79	M12x130	45	100	9000	218	5.21.80.12.130
Pivot Foot-PA 6 Base	79	M16x130	45	100	9000	328	5.21.80.16.130
Pivot Foot-PA 6 Base	99	M12x130	45	100	10000	326	5.21.100.12.130
Pivot Foot-PA 6 Base	99	M16x130	45	100	10000	436	5.21.100.16.130

Leveling Foot/ Swivel Foot

Elementos de Piso




Material: Base-black PA6
Spindle- Zinc plated steel
Pad- Black rubber

Para apoyar estructuras donde requerirá ajustes graduales de altura, el pie girador tiene una bola entre la base y el eje, permitiéndole a la pata girarse a un ángulo hasta de 30°. Es aplicable para componentes que se mueven frecuentemente

To support structure where gradual height adjustment is needed, the swivel foot has a ball joining between the base and spindle, thus allowing the foot to swivel to an angle up to 30°. It is suitable to be used on the components moved frequently.


Swivel Foot



Description	D (mm)	KxL (mm)	H min. (mm)	H max. (mm)	Max. Static Load (N)	Mass (g)	Part No.
Swivel Foot-PA 6 Base	59	M12x90	45	70	4500	152	5.22.60.12.90
Swivel Foot-PA 6 Base	59	M12x130	45	70	9000	220	5.22.80.12.90
Swivel Foot-PA 6 Base	79	M12x130	45	100	9000	188	5.22.80.12.130
Swivel Foot-PA 6 Base	79	M16x130	45	100	9000	218	5.22.80.16.130
Swivel Foot-PA 6 Base	79	M12x130	45	100	10000	328	5.22.100.12.130
Swivel Foot-PA 6 Base	99	M16x130	45	100	10000	326	5.22.100.16.130
Swivel Foot-PA 6 Base	80	M12x100					30.4.05.1.80.12.100

Leveling Foot/ Swivel Foot with holes

Elementos de Piso

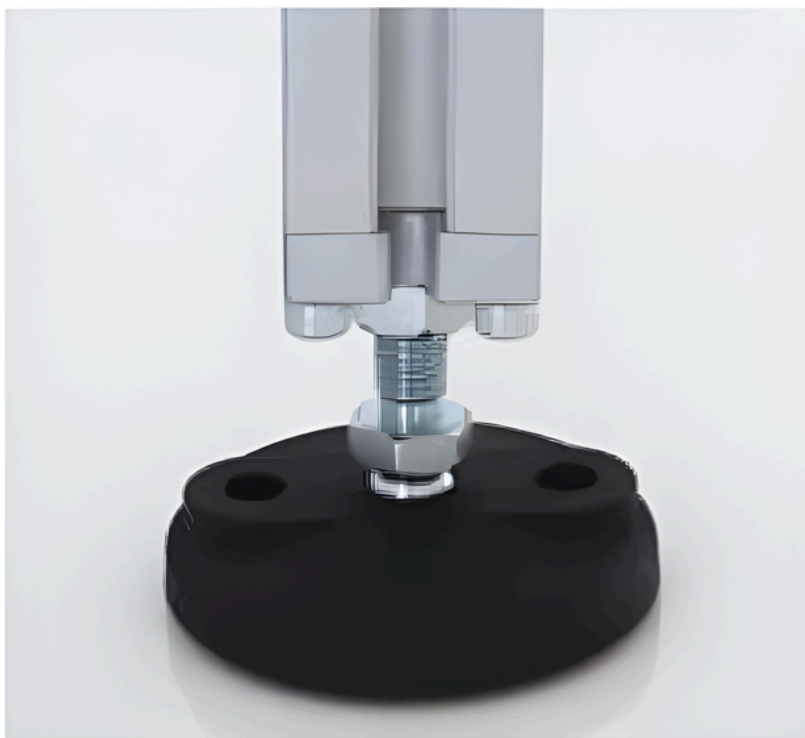


Material: Base-black PA6
Spindle- Zinc plated steel
Pad- Black rubber


Para apoyar estructuras donde requerirá ajustes graduales de altura, el pie girador tiene una bola entre la base y el eje, permitiéndole a la pata girarse a un ángulo hasta de 30°. Es recomendada para superficies desiguales.

To support structure where gradual height adjustment is needed, the swivel foot has a ball joint between the base and spindle, thus allowing the foot to swivel to an angle up to 30°. It is suitable for uneven surface and fixed with expansion bolts.

Swivel Foot with holes




Description	D (mm)	P (mm)	KxL (mm)	H min. (mm)	H max. (mm)	Max. Static Load (N)	Fastening Set	Mass (g)	Part No.
Swivel Foot with holes-PA 6 Base (pcs)	80	50	M12x130	45	100	9000		217	5.22.80.12.130.DH
Swivel Foot with holes-PA 6 Base (set)	80	50	M12x130	45	100	9000	2x DN	291	5.22.80.12.130.DH.SET
Swivel Foot with holes-PA 6 Base (pcs)	80	50	M16x130	45	100	9000		297	5.22.80.16.130.DH
Swivel Foot with holes-PA 6 Base (set)	80	50	M16x130	45	100	9000	2x DN	317	5.22.80.16.130.DH.SET



Leveling Foot/ Fixed Foot

Elementos de Piso

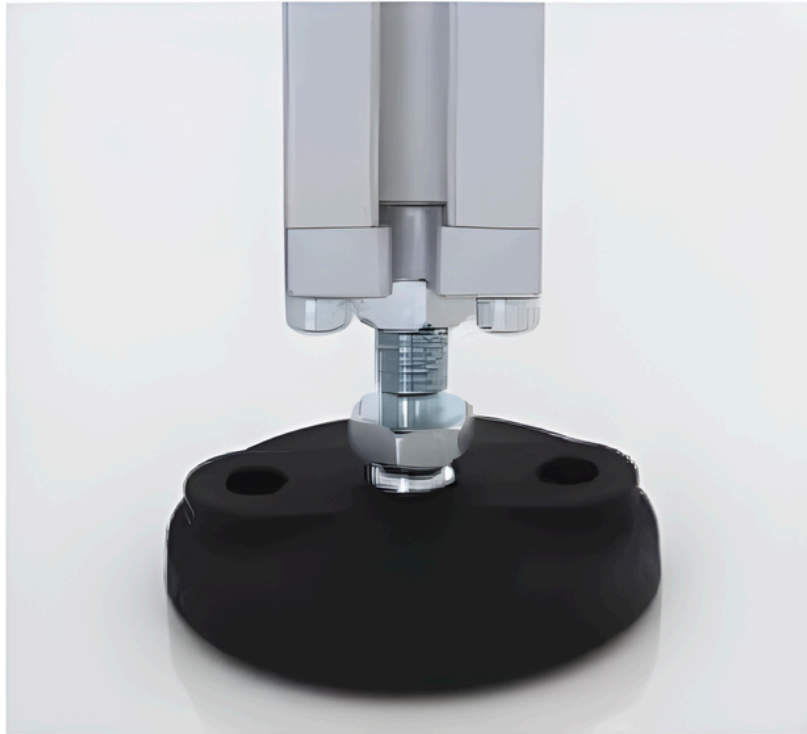


Material: Base-black PA6
Spindle- Zinc plated steel
Pad- Black rubber

La pata de nivelación tiene una conexión inmóvil entre la base y el tornillo

Fixed foot have a non-moving connection between base and spindle

Fixed Foot

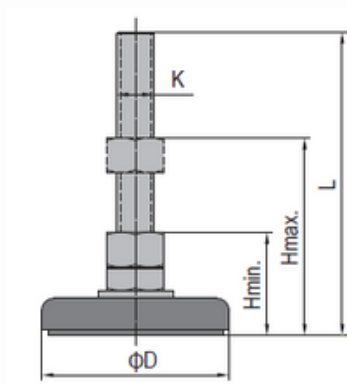

Description	D (mm)	KxL (mm)	H min. (mm)	H max. (mm)	Max. Static Load (N)	Mass (g)	Part No.
Fixed Foot- Steel Base	40	M12x70	35	50	4000	124	5.23.40.12.70
Fixed Foot- Steel Base	60	M12x70	35	50	7000	181	5.23.60.12.70
Fixed Foot- Steel Base	60	M14x70	38	50	7000	225	5.23.60.14.70
Fixed Foot- Steel Base	80	M12x70	35	50	9000	220	5.23.80.12.70
Fixed Foot- Steel Base	80	M12x110	35	80	9000	240	5.23.80.12.110
Fixed Foot- Steel Base	80	M14x70	38	50	9000	283	5.23.80.14.70

Ad: M14 Fixed Foot should use an end cap with a punched hole

Leveling Foot/ Pivot Foot

Elementos de Piso




Material: Zinc plated steel/ stainless steel

Para apoyar estructuras donde requerirá ajustes graduales de altura, el pie con pivote tiene un pequeño ángulo para arreglar la altura en pisos desnivelados. La conexión entre la base del pivote y la tuerca puede ser liberada con herramienta

To support structure where gradual height adjustment is needed, the pivot foot has a small swiveling angle to fit slightly uneven floor. The connection between the pivot base and the spindle can be released with a tool.

Pivot Foot

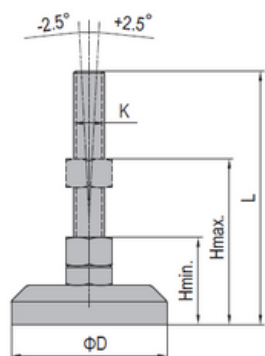


Description	D (mm)	KxL (mm)	H min. (mm)	H max. (mm)	Max. Static Load (N)	Mass (g)	Part No.
Pivot Foot-Zinc Plate Steel	40	M12x128	45	100	15000	241	5.24.40.12.130
Pivot Foot-Zinc Plate Steel	40	M14x128	45	100	17000	290	5.24.40.14.130
Pivot Foot-Zinc Plate Steel	60	M12x128	45	100	15000	475	5.24.60.12.130
Pivot Foot-Zinc Plate Steel	80	M14x128	45	100	17000	523	5.24.60.14.130
Pivot Foot-Zinc Plate Steel	60	M16x158	45	120	20000	596	5.24.60.16.160
Pivot Foot-Zinc Plate Steel	60	M20x178	50	130	25000	796	5.24.60.20.180
Pivot Foot-Zinc Plate Steel	80	M12x128	45	100	15000	670	5.24.80.12.130
Pivot Foot-Zinc Plate Steel	80	M16x158	45	120	20000	780	5.24.80.16.160
Pivot Foot-Zinc Plate Steel	80	M20x178	50	130	25000	945	5.24.80.20.180
Pivot Foot- Stainless Steel	40	M12x128	45	100	15000	240	5.24.40.12.130.SS
Pivot Foot- Stainless Steel	60	M12x128	45	100	15000	480	5.24.60.12.130.SS
Pivot Foot- Stainless Steel	60	M16x158	45	120	20000	600	5.24.60.16.160.SS
Pivot Foot- Stainless Steel	60	M20x178	50	130	25000	803	5.24.60.20.180.SS
Pivot Foot- Stainless Steel	80	M12x128	45	100	15000	675	5.24.80.12.130.SS
Pivot Foot- Stainless Steel	80	M16x158	45	120	20000	785	5.24.80.16.160.SS
Pivot Foot- Stainless Steel	80	M20x178	50	130	25000	950	5.24.80.20.180.SS
Leveling Pivot Foot	50	M12x100					40.4.05.1.50.12.100
Leveling Foot	60	M12X60					40.4.05.2.60.12.60

Más vendido

Cup Pivot Foot

Elementos de Piso

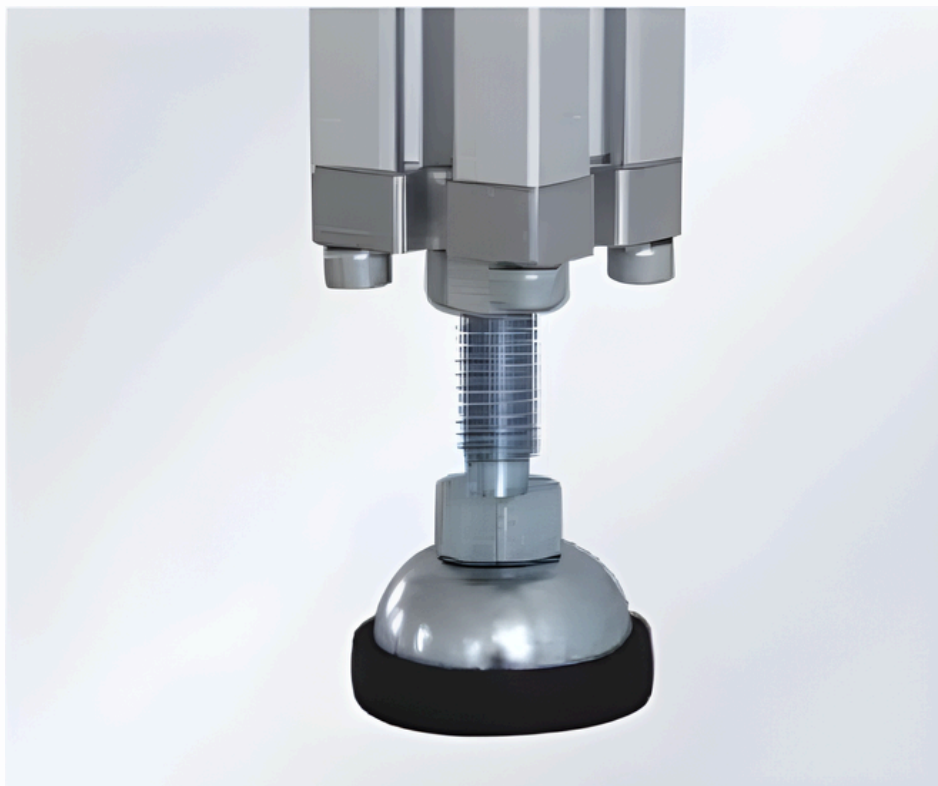


Material: Zinc plated steel

Para apoyar estructuras donde requerirá ajustes graduales de altura, el pie con pivote tiene un pequeño ángulo para arreglar la altura en pisos desnivelados. La conexión entre la base del pivote y la tuerca puede ser liberada con herramienta

To support structure where gradual height adjustment is needed, the pivot foot has a small swiveling angle to fit slightly uneven floor. The connection between the pivot base and the spindle can be released with a tool.

Cup Pivot Foot

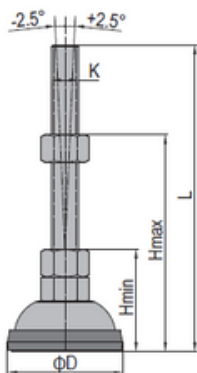

Description	D (mm)	KxL (mm)	H min. (mm)	H max. (mm)	Max. Static Load (N)	Mass (g)	Part No.
Cup Pivot Foot	45	M12x132	50	105	10000	148	5.25.40.12.130
Cup Pivot Foot	50	M12x132	50	105	10000	207	5.25.45.12.130



Mounting Plate


Elementos de Piso




Material: Diecast aluminum

Usado para unir la pata niveladora o rueda a la punta del perfil estructural


To attach leveling foot or castor to strut profile end, but it does not apply for connecting of castors

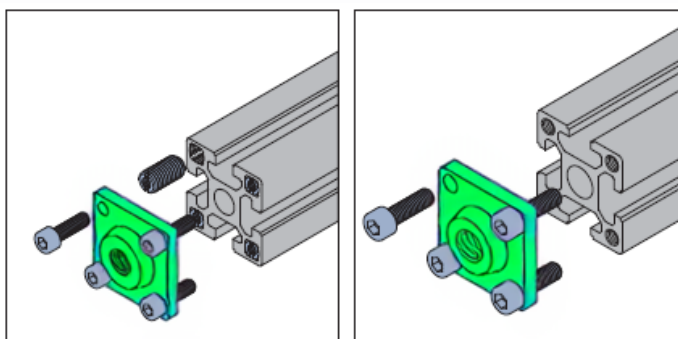


**PG40-4040 PG45-4545
PG50-5050**

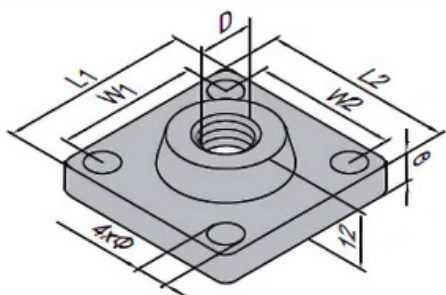

PG40-4060 PG45-4560

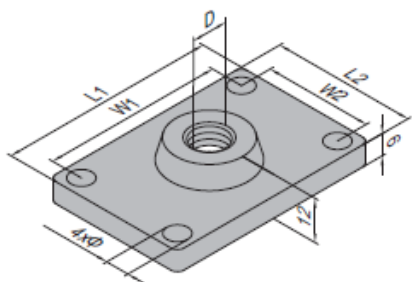

PG40-4080 PG45-4590

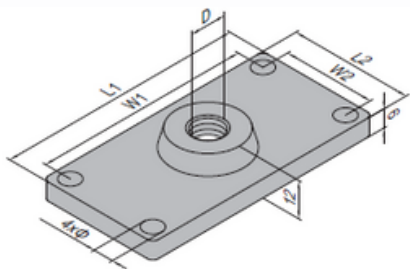

Description	D	Ø	L1 (mm)	L2 (mm)	W1 (mm)	W2 (mm)	Fastening Set	Mass (g)	Part No.
Mounting Plate-PG40-4040	M12	6.5	40	40	30	30	4x(M6x20)	51	5.31.40.4040
Mounting Plate-PG45-4545	M12	6.5	45	45	33	33	4xFC	97	5.31.45.4545
Mounting Plate-PG50-5050	M12	6.5	50	50	35	35	4x(M8x30)	130	5.31.50.5050
Mounting Plate-PG40-4060	M12	6.5	60	40	50	30	4x(M6x20)	67	5.31.40.4060
Mounting Plate-PG45-4560	M12	6.5	60	45	48	33	4xFC	108	5.31.45.4560
Mounting Plate-PG40-4080	M12	6.5	80	40	70	30	4x(M6x20)	78	5.31.40.4080.M12
	M16						4x(M6x20)	78	5.31.40.4080.M16
Mounting Plate-PG45-4590	M12	6.5	90	45	78	33	4xFC	131	5.31.45.4590.M12
	M16						4xFC	128	5.31.45.4590.M16

FC	Fastening Set
	M6x20 Bolt
	M10-M6 Hole Reducer Bolt

Mounting Plate


Elementos de Piso




Material: Spray coating steel

Usado para unir la pata niveladora o rueda a la punta del perfil estructural


To attach leveling foot or castor to strut profile end

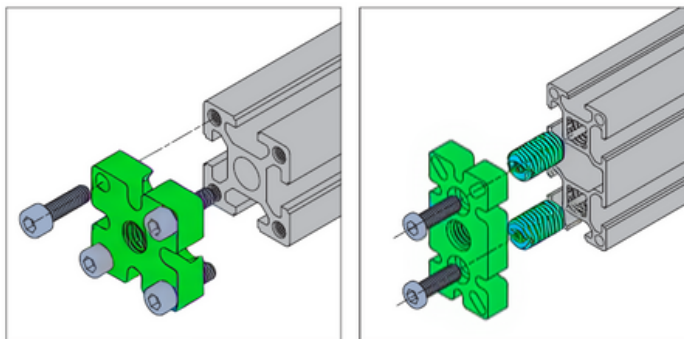


**PG40-4040 PG45-4545
PG50-5050**

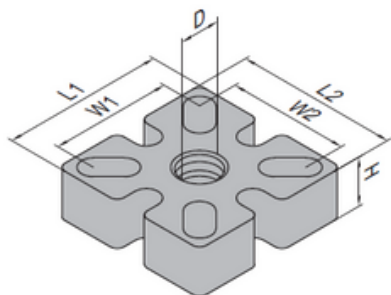


PG40-4060 PG45-4560

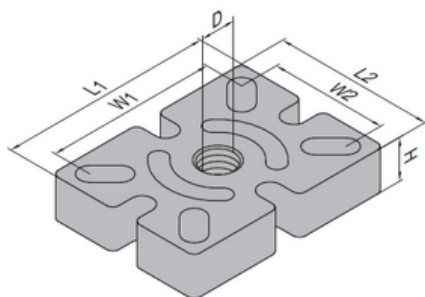



**PG30-3060 PG40-4080
PG45-4590 PG50-50100**

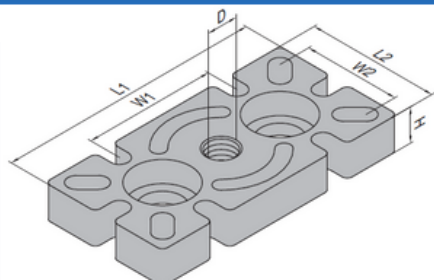


**PG30-6060 PG40-8080
PG45-9090 PG50-100100
PG60-6060**

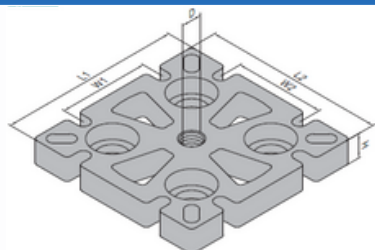


Description	D (mm)	L1 (mm)	L2 (mm)	W1 (mm)	W2 (mm)	H (mm)	Fastening Set	Mass (g)	Part No.
Mounting Plate-PG40-4040	M12	40	40	30	30	12	4x(M6x20)	128	5.32.4040
Mounting Plate-PG45-4545	M12	45	45	33	33	12	4xFI	203	5.32.45.4545
Mounting Plate-PG50-5050	M12	50	50	35	35	12	4x(M8x20)	218	5.32.50.5050
Mounting Plate-PG40-4060	M12	60	40	50	30	12	4x(M6x20)	176	5.32.40.4060
Mounting Plate-PG45-4560	M12	60	45	48	33	12	4xFI	220	5.32.45.4560
Mounting Plate-PG30-3060	M12	60	30	30	23	10	2xFZ	133	5.32.30.3060
Mounting Plate-PG40-4080	M12	80	40	40	30	12	2x(M14x25)	272	5.32.40.4080.M12
	M16							270	5.32.40.4080.M16
Mounting Plate-PG45-4590	M12	90	45	45	33	12	2x(M14x25)	332	5.32.45.4590.M12
	M16							330	5.32.45.4590.M16
Mounting Plate-PG50-50100	M12	100	50	50	35	12	2x(M14x25)	332	5.32.50.50100.M12
	M16							329	5.32.50.50100.M16
	M20							327	5.32.50.50100.M20




**PG30-3030
PG30-3060**

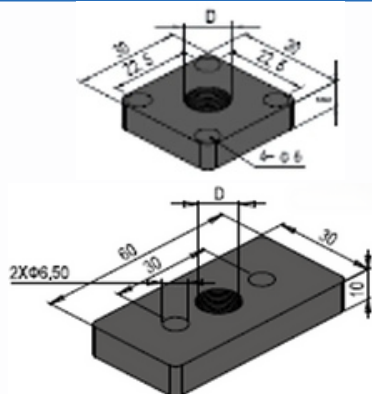

**PG40-4040
PG40-4080**

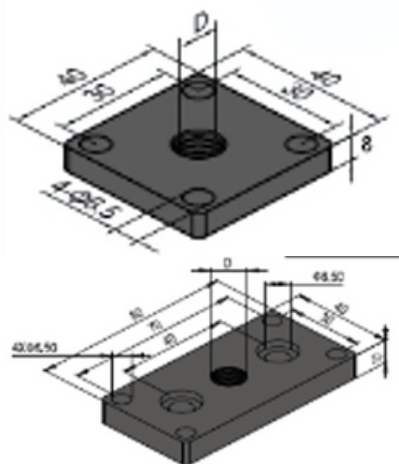

**PG45-4545
PG45-4590**

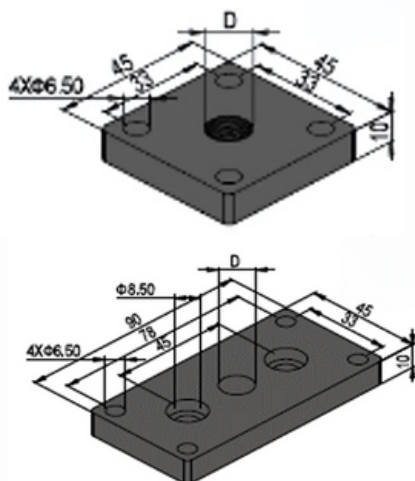

Description	D (mm)	L1 (mm)	L2 (mm)	W1 (mm)	W2 (mm)	H (mm)	Fastening Set	Mass (g)	Part No.
Mounting Plate-PG30-6060	M12	60	60	30	30	10	4x FZ	232	5.32.30.6060.M12
	M16	60	60	30	30	10	4x FZ	230	5.32.30.6060.M16
Mounting Plate-PG40-8080	M12	80	80	40	40	12	4x(M14x25)	534	5.32.40.8080.M12
	M16	80	80	40	40	12	4x(M14x25)	532	5.32.40.8080.M16
	M20	80	80	40	40	12	4x(M14x25)	530	5.32.40.8080.M20
Mounting Plate-PG45-9090	M12	90	90	45	45	12	4x(M14x25)	664	5.32.45.9090.M12
	M16	90	90	45	45	12	4x(M14x25)	661	5.32.45.9090.M16
	M20	90	90	45	45	12	4x(M14x25)	659	5.32.45.9090.M20
Mounting Plate-PG50-100100	M12	100	100	50	50	12	4x(M14x25)	725	5.32.50.100100.M12
	M16	100	100	50	50	12	4x(M14x25)	722	5.32.50.100100.M16
	M20	100	100	50	50	12	4x(M14x25)	720	5.32.50.100100.M20
Mounting Plate-PG60-6060	M12	60	60	40	40	10	4x FY	330	5.32.60.6060
Mounting Plate PG30-3030	M12						4x Y	74	30.4.07.1.3030.12.02
Mounting Plate PG30-3060	M12						4x Y	123	30.4.07.1.3060.12.02
Mounting Plate PG40-4040	M12						4x Y	123	40.4.07.1.4040.12.02
Mounting Plate PG40-4080	M12						4x Y	123	40.4.07.1.4080.12.02
Mounting Plate PG45-4545	M12						4x Y	153	45.4.07.1.4545.12.02
Mounting Plate PG45-4590	M12						4x Y	232	45.4.07.1.4590.12.02

FY	Fastening Set	FZ	Fastening Set
	M8x20 Bolt		M6x20 Bolt
	M16-M8 Hole Reducer Bolt		M12-M6 Hole Reducer Bolt

Mounting Plate


Elementos de Piso




Material: Die Cast Zinc

Usado para unir la pata niveladora o rueda a la punta del perfil estructural


To attach leveling foot or castor to strut profile end

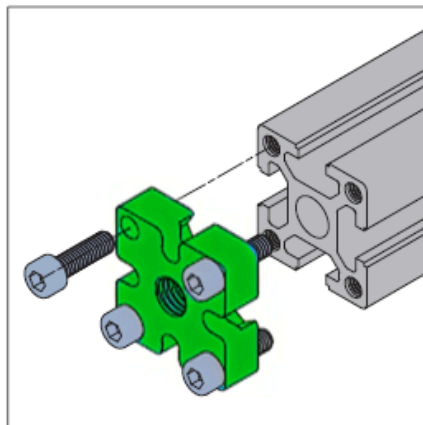


PG40-4040 PG45-4545

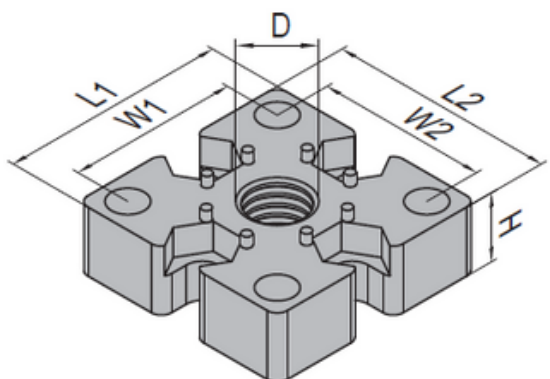

PG40-4080 G45-4590

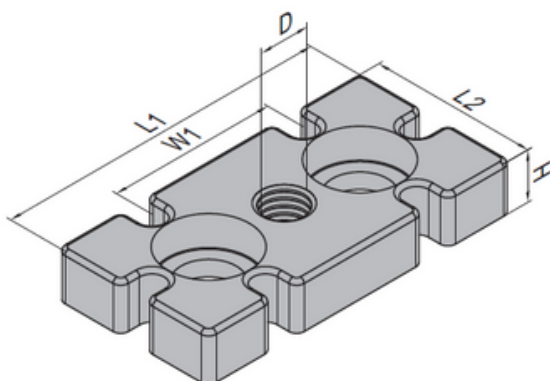

PG40-8080 PG45-9090

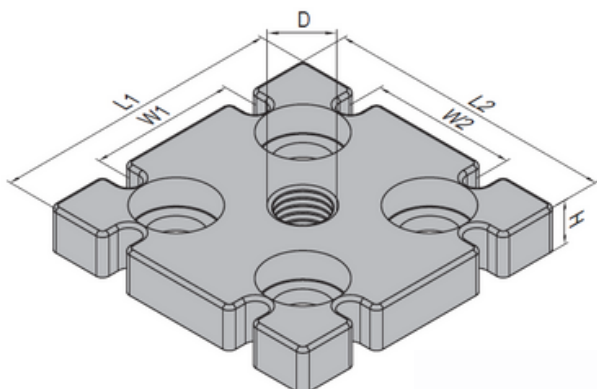

Description	D (mm)	L1 (mm)	L2 (mm)	W1 (mm)	W2 (mm)	H (mm)	Fastening Set	Mass (g)	Part No.
Mounting Plate-PG40-4040	M12	40	40	30	30	12	4x(M6x20)	117	5.33.40.4040
Mounting Plate-PG45-4545	M12	45	45	33	33	12	4xFC	189	5.33.45.4545
Mounting Plate-PG40-4080	M12	80	40	40		12	2x(M14x25)	277	5.33.40.4080.M12
	M16	80	40	40		12	2x(M14x25)	275	5.33.40.4080.M16
Mounting Plate-PG45-4590	M12	90	45	45		12	2x(M14x25)	344	5.33.45.4590.M12
	M16	90	45	45		12	2x(M14x25)	342	5.33.45.4590.M16
Mounting Plate-PG40-8080	M12	80	80	40	40	12	4x(M14x25)	582	5.33.40.8080.M12
	M16	80	80	40	40	12	4x(M14x25)	580	5.33.40.8080.M16
	M20	80	80	40	40	12	4x(M14x25)	577	5.33.40.8080.M20
Mounting Plate-PG45-9090	M12	90	90	45	45	12	4x(M14x25)	714	5.33.45.9090.M12
	M16	90	90	45	45	12	4x(M14x25)	714	5.33.45.9090.M16
	M20	90	90	45	45	12	4xFY	709	5.33.45.9090.M20

FC	Fastening Set
	M6x20 Bolt
	M10-M6 Hole Reducer Bolt

Mounting Plate

Elementos de Piso




Material: Steel


Color: Negro

Usado para unir la pata niveladora o rueda a la punta del perfil estructural

To attach leveling foot or castor to strut profile end

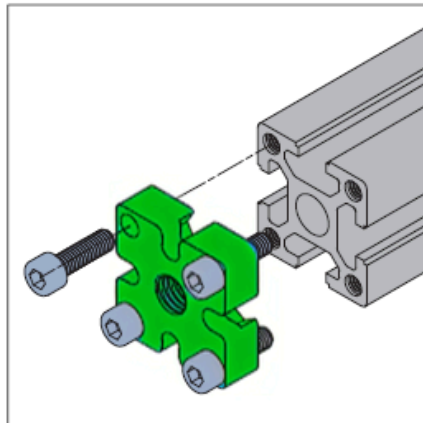


PG30

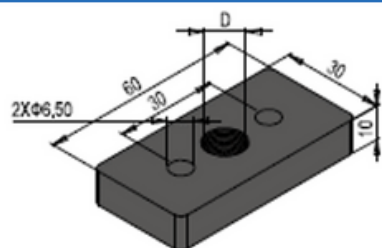


NA	Fastening Set	R	Fastening Set
	M5x25 Bolt		M6x20 Bolt
			M14/M6 Reducer bolt

PG40

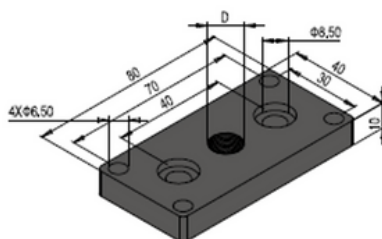

Y	Fastening Set	BC	Fastening Set
	M6x20 Bolt		M8x20 Bolt
			M14/M8 Reducer bolt

PG45







BE	Fastening Set	BC	Fastening Set
	M6x20 Bolt		M8x20 Bolt
	M14/M6 Reducer bolt		M14/M8 Reducer bolt

Description	Fastener	D (mm)	NW (g)	Part No.
3030 Plate	2xNA	M12	74	30.4.07.1.3030.12.02
3060 Plate	2xR	M12	123	30.4.07.1.3060.12.02
6060 Plate	4xR	M12	300	30.4.07.1.6060.12.02
4040 Plate	4xY	M14	105	40.4.07.1.4040.12.02
4080 Plate	4xY	M12	162	40.4.07.1.4080.12.02
8080 Plate	4xBC	M16	492	40.4.07.1.8080.12.02
4545 Plate	4xBE	M14	153	45.4.07.1.4545.12.02
4590 Plate	4xBE	M12	232	45.4.07.1.4590.12.02
9090 Plate	4xBC	M16	606	45.4.07.1.9090.16.02

Más
vendido

Castor Plate

Elementos de Piso

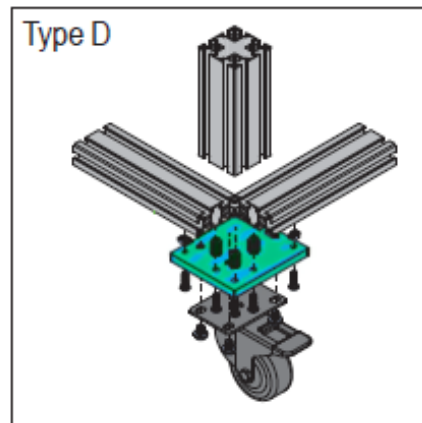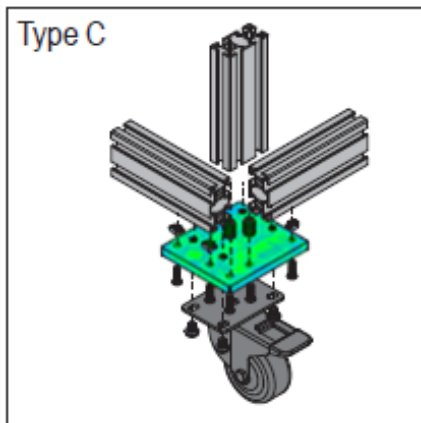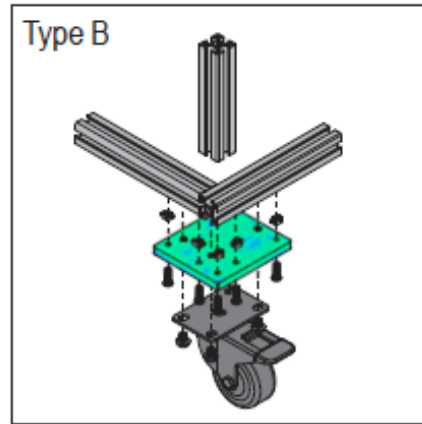
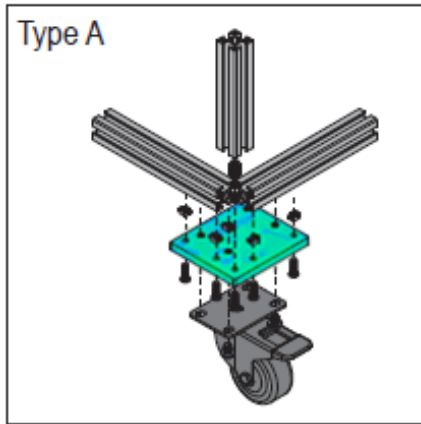


Material: Zinc plated steel

La base de la rueda es usada para unir los perfiles a la llanta

The castor plate is used for attaching profiles to the castor with plate

PG40-4040 PG45-4545

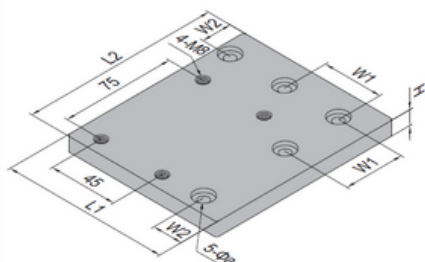


Description	PG	H (mm)	L1 (mm)	L2 (mm)	W1 (mm)	W2 (mm)	Qa (mm)	Fastening Set	Mass (g)	Part No.
Castor Plate A-PG30	PG30	10	105	120	30	15	7	4xGL+1xGM+4xAM	1056	5.34.30.SETA
Castor Plate B-PG30	PG30	10	105	120	30	15	7	5xGL+4xAM	1049	5.34.30.SETB
Castor Plate C-PG30	PG30	10	105	120	30	15	7	3xGL+2xGM+4xAM	1063	5.34.30.SETC
Castor Plate D-PG30	PG30	10	105	120	30	15	7	2xGL+3xGM+4xAM	1070	5.34.30.SETD
Castor Plate A-PG40	PG40	12	110	130	40	20	9	4xGJ+1xGN+4xAM	1229	5.34.40.SETA
Castor Plate B-PG40	PG40	12	110	130	40	20	9	5xGJ+4xAM	1222	5.34.40.SETB
Castor Plate C-PG40	PG40	12	110	130	40	20	9	3xGJ+2xGN+4xAM	1236	5.34.40.SETC
Castor Plate D-PG40	PG40	12	110	130	40	20	9	2xGJ+2xGN+4xAM	1243	5.34.40.SETD
Castor Plate A-PG45	PG45	12	120	130	45	22.5	9	4xGK+1xGN+4xAM	1237	5.34.45.SETA
Castor Plate B-PG45	PG45	12	120	130	45	22.5	9	5xGK+4xAM	1230	5.34.45.SETB
Castor Plate C-PG45	PG45	12	120	130	45	22.5	9	3xGK+2xGN+4xAM	1244	5.34.45.SETC
Castor Plate D-PG45	PG45	12	120	130	45	22.5	9	2xGK+3xGN+4xAM	1251	5.34.45.SETD

CJ	Fastening Set	GK	Fastening Set	GL	Fastening Set	GM	Fastening Set
	M8x20 Bolt		M8x25 Bolt		M6x16 Bolt		M6x20 Bolt
	M8 Spring Washer		M8 Spring Washer		M6 Spring Washer		M6 Spring Washer
	M8 T Nut		M8 T Nut		M6 T Nut		M12-M6 Hole Reducer Bolt

Castor Plate-Heavy



Elementos de Piso

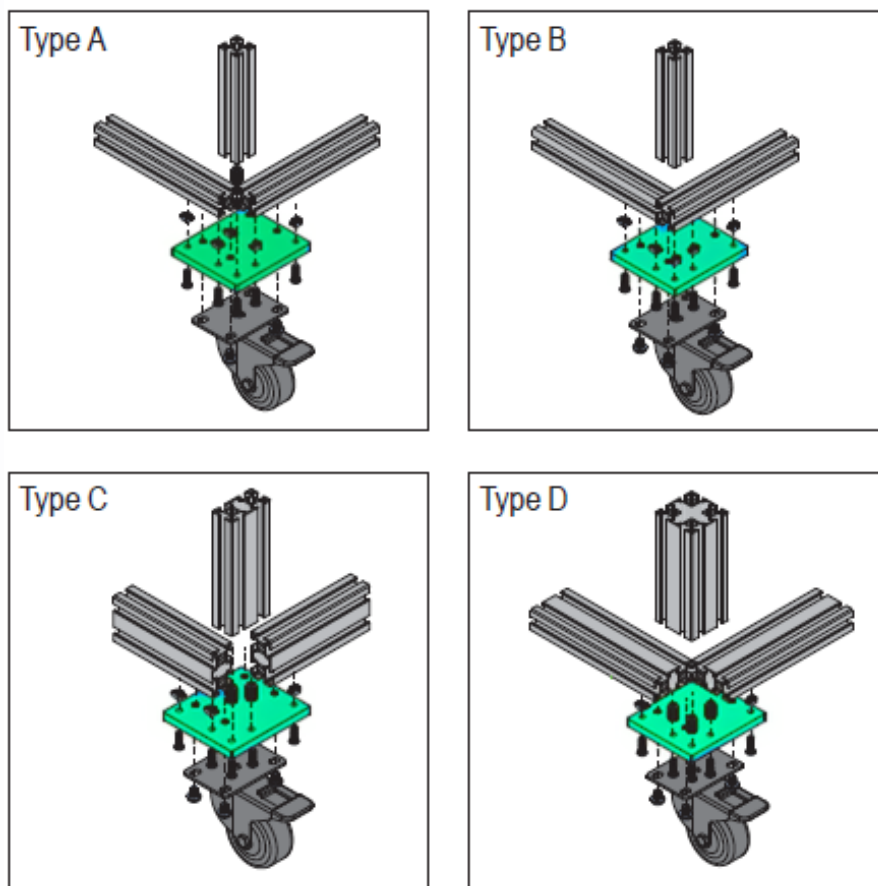

Material: Zinc plated steel

La base de rueda es usada para unir los perfiles a la llanta con una base de uso pesado

The castor plate is used for attaching profiles to the castor with plate-Heavy

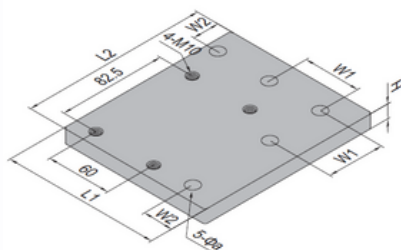

Description	PG	H (mm)	L1 (mm)	L2 (mm)	W1 (mm)	W2 (mm)	Øa (mm)	Fastening Set	Mass (g)	Part No.
Castor Plate-Heavy A-PG30	PG30	10	105	135	30	15	7	4xDO+1xDQ+4xDS	1364	5.34.30.H.SETA
Castor Plate-Heavy B-PG30	PG30	10	105	135	30	15	7	5xDO+4xDS	1356	5.34.30.H.SETB
Castor Plate-Heavy C-PG30	PG30	10	105	135	30	15	7	3xDO+2xDQ+4xDS	1372	5.34.30.H.SETC
Castor Plate-Heavy D-PG30	PG30	10	105	135	30	15	7	2xDO+4xDS	1380	5.34.30.H.SETD
Castor Plate-Heavy A-PG40	PG40	12	110	145	40	20	9	4xDP+1xDR+4xDS	1834	5.34.40.H.SETA
Castor Plate-Heavy B-PG40	PG40	12	110	145	40	20	9	5xDP+4xDS	1826	5.34.40.H.SETB
Castor Plate-Heavy C-PG40	PG40	12	110	145	40	20	9	3xDP+2xDR+4xDS	1842	5.34.40.H.SETC
Castor Plate-Heavy D-PG40	PG40	12	110	145	40	20	9	2xDP+3xDR+4xDS	1850	5.34.40.H.SETD
Castor Plate-Heavy A-PG45	PG45	12	120	145	45	22.5	9	4xDP+1xDR+4xDS	1969	5.34.45.H.SETA
Castor Plate-Heavy B-PG45	PG45	12	120	145	45	22.5	9	5xDP+4xDS	1972	5.34.45.H.SETB
Castor Plate-Heavy C-PG45	PG45	12	120	145	45	22.5	9	3xDP+2xDR+4xDS	1977	5.34.45.H.SETC
Castor Plate-Heavy D-PG45	PG45	12	120	145	45	22.5	9	2xDP+3xDR+4xDS	1985	5.34.45.H.SETD

DO	Fastening Set
	M6x20 Bolt
	M6 Spring Washer
	M6 Washer
	M6 T Nut

DQ	Fastening Set
	M6x20 Bolt
	M6 Spring Washer
	M6 Washer
	M12-M6 Hole Reducer Bolt



DS	Fastening Set
	M10x16 Bolt
	M10 Washer

DP	Fastening Set
	M8x25 Bolt
	M8 Spring Washer
	M8 Washer
	M8 T Nut

DR	Fastening Set
	M8x25 Bolt
	M8 Spring Washer
	M8 Washer
	M14-M8 Hole Reducer Bolt

Castor Plate



Elementos de Piso

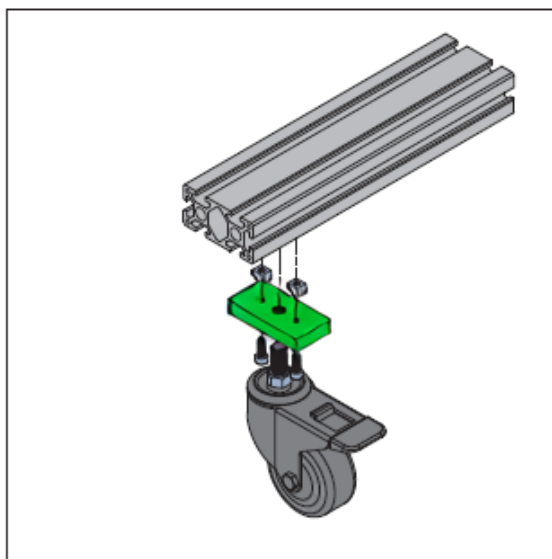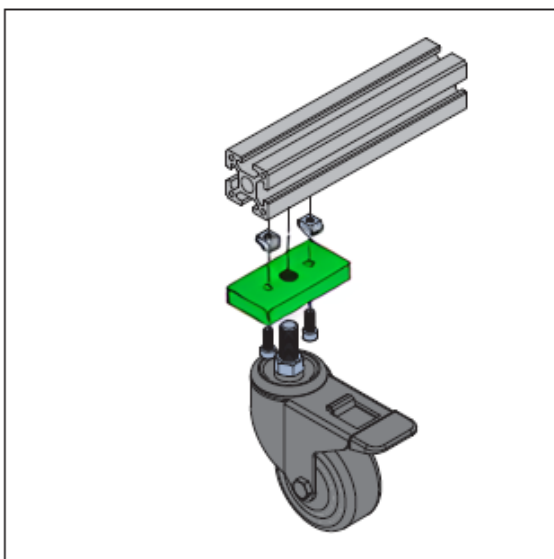

Material: Zinc plated steel

La base de la rueda es usada para unir los perfiles a la llanta con hilo

The castor plate is used for attaching profiles to the castor with thread

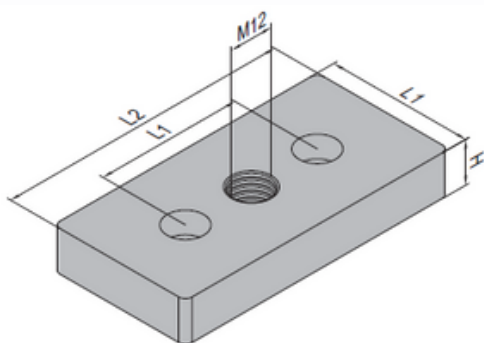

Description	PG	H (mm)	L1 (mm)	L2 (mm)	Fastening Set	Mass (g)	Part No.
Castor Plate-PG30	PG30	10	30	60	2x FS	162	5.35.30.SET
Castor Plate-PG40	PG40	12	40	80	2x CQ	296	5.35.40.SET
Castor Plate-PG45	PG45	12	45	90	2x CQ	377	5.35.45.SET

When the castor is installed with this castor plate, the profile need to be machined with a Ø12.5 and 20mm depth hole at the corresponding position to the thread of the castor.


FS	Fastening Set	CQ	Fastening Set
	M6x10 Bolt		M6x16 Bolt
	M6 T Nut		M6 T Nut

Castor


Elementos de Piso



Material: Base- Carbon steel, plastic powder coated
Wheel- Polyurethane (Heavy duty- Nylon)

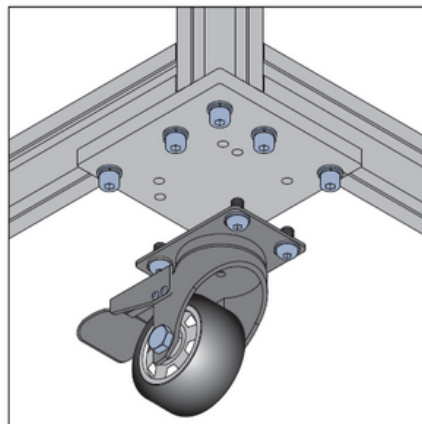

Thread- Universal



Thread-Break-Universal




Plate-Universal-Heavy

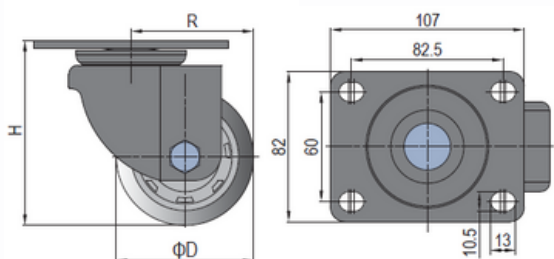


Plate-Universal

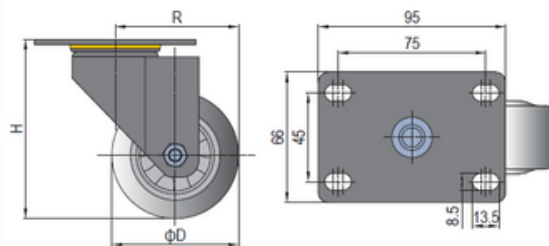


Plate-Fixed-Heavy

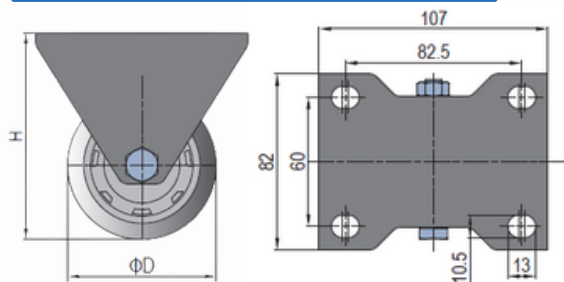


Plate-Fixed


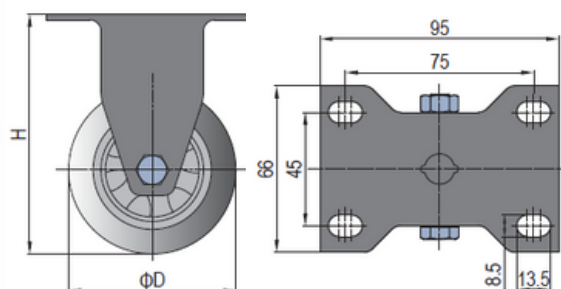



Plate-Brake

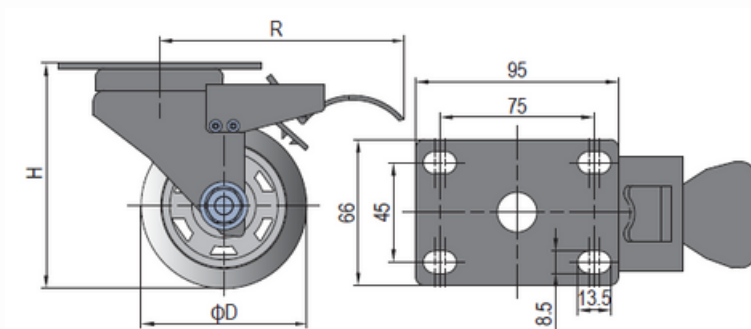

Description	Wheel Width (mm)	D (mm)	R (mm)	H (mm)	Load (N)	Mass (g)	Part No.	
Castor-Thread-Universal	32	63	63	104	800	500	5.41.63.M12	Más vendido
	32	75	73	119	1050	670	5.41.75.M12	
	32	100	87	142	1350	790	5.41.100.M12	Más vendido
Castor-Thread-Brake-Universal	32	63	112	104	800	650	5.41.63.M12B	Más vendido
	32	75	112	119	1050	770	40.4.06.2.2.75.1	
	32	100	122	142	1350	930	5.41.100.M12B	Más vendido
Castor-Plate- Universal	32	63	63	92	800	570	5.41.63U	
	32	75	73	107	1050	690	5.41.75U	
	32	100	87	130	1350	870	5.41.100U	
Castor-Plate- Fixed	32	63		92	800	370	5.41.63F	
	32	75		107	1050	490	5.41.75F	
	32	100		130	1350	670	5.41.100F	
Castor-Plate-Brake	32	63	118	92	800	670	5.41.63B	
	32	75	118	107	1050	790	5.41.75B	
	32	100	127	130	1350	970	5.41.100B	
Castor-Plate- Universal-Heavy	50	75	65	104	6000	1150	5.41.75UH	
Castor-Plate- Fixed-Heavy	50	75		104	6000	950	5.41.75FH	
Castor- Thread		50					40.4.06.2.2.50.2	

Base Angle


Elementos de Piso



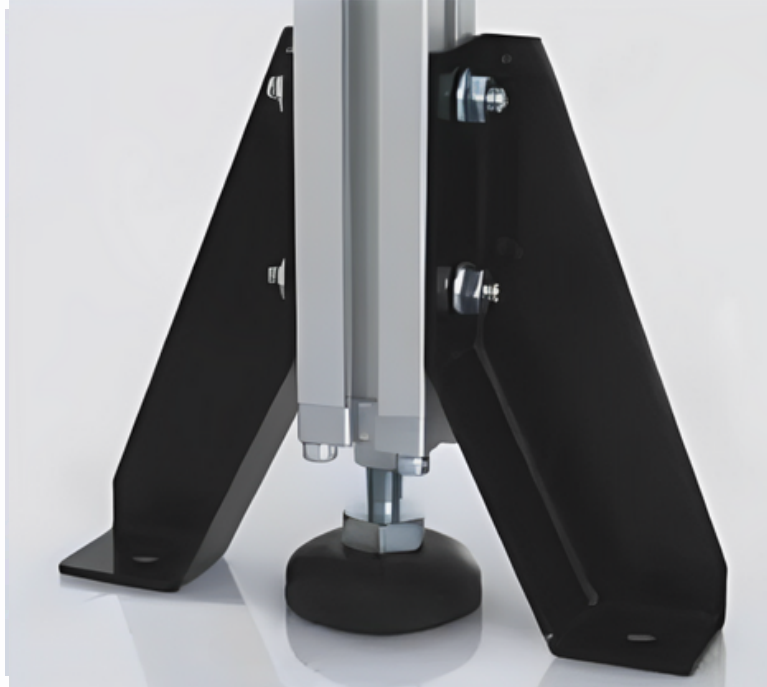


Material: Steel, black electrophoresis

Mejora la estabilidad de una estructura apoyada con pata niveladora

To improve stability of structure supported by leveling foot

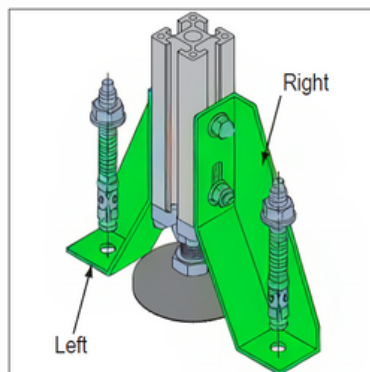

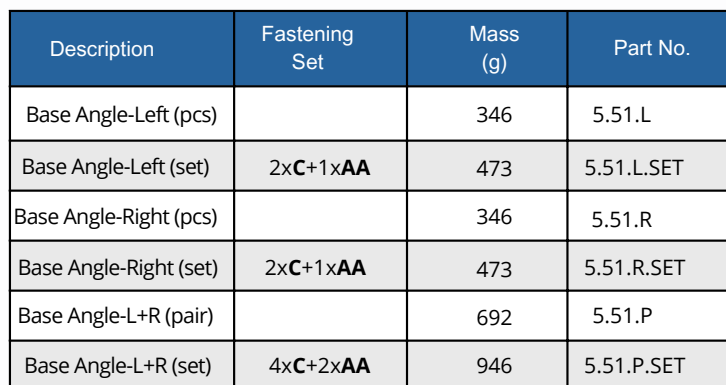

L Base


Elementos de Piso




Material: Diecast aluminum black electrophoresis

La base en L es para atornillar el perfil al piso, ajustando a la altura deseada

L base is to fix the profile on the floor and adjust the height of the profile to the floor

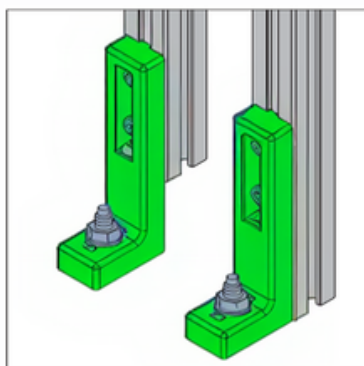

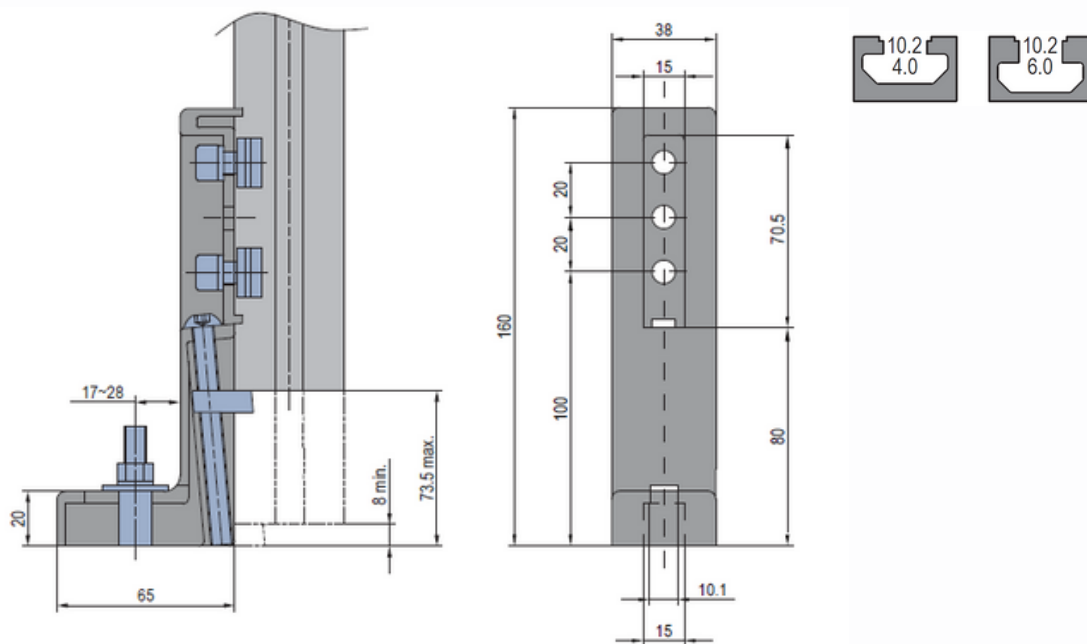


Description	Fastening Set	Mass (g)	Part No.
L Base (pcs)		276	5.52.10
L Base-PG40 (set)	2x DI +1x DN	343	5.52.10.04.ST
L Base-PG45 (set)	2x DM +1x DN	346	5.52.10.06.ST

DI Fastening Set	DM Fastening Set	DN Fastening Set
 M8x16 Bolt  M8 Spring Washer  M8 Pre-set Nut	 M8x20 Bolt  M8 Spring Washer  M8 Pre-set Nut	 M10x100 Expansion bolt

Foot and Castor Components

Elementos de Piso

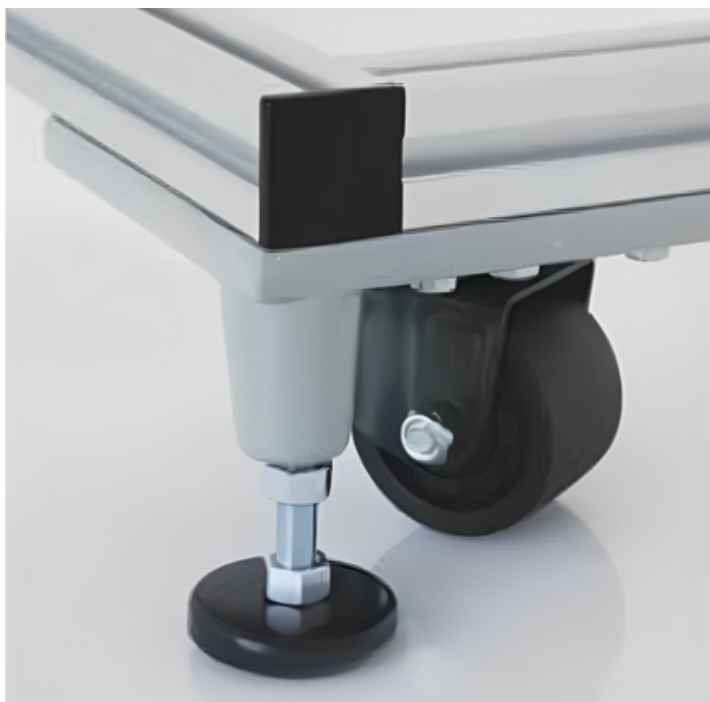


LIGHT


Material: Foot- Steel black electrophoresis
Wheel- Polyurethane
Plate- Diecast aluminum

HEAVY:


Material: Foot- Zinc plated steel
Wheel- PA
Plate- Cast steel

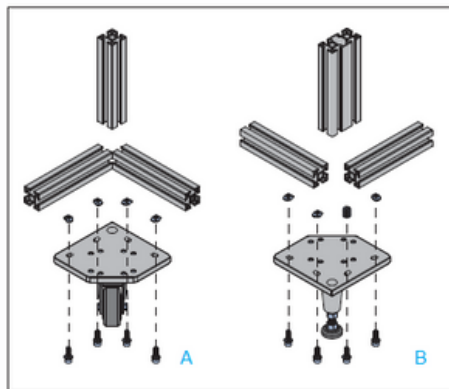

Light

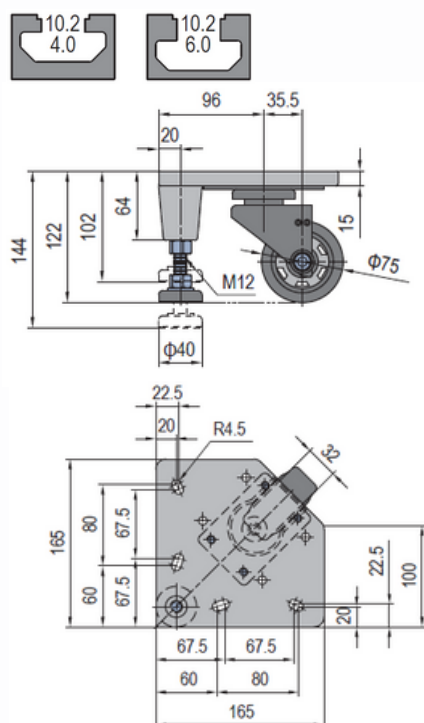

Heavy

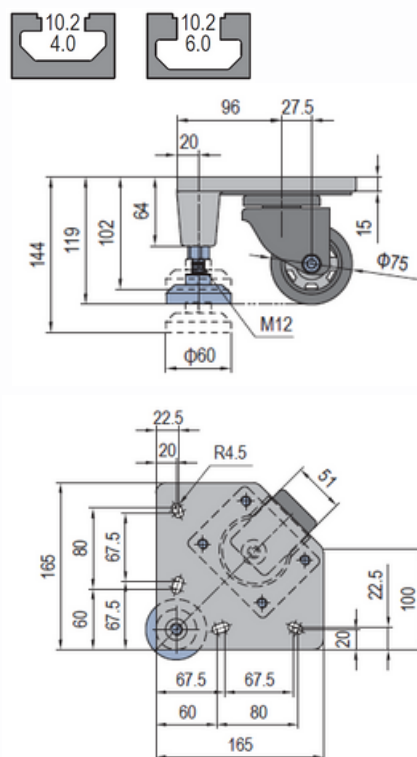

Description	Fastening Set	Load (N)	Mass (g)	Part No.
Light Weight (pcs)		1050	3900	5.61.L
Light Weight (set)	4xJ	1050	3950	5.61.40.L.SETA Más vendido
	3xJ+1xAF	1050	3950	5.61.40.L.SETB Más vendido
	4xW	1050	3950	5.61.45.L.SETA
	3xW+1xAG	1050	3950	5.61.45.L.SETB
Heavy Weight (pcs)		6000	4600	5.61.H
Heavy Weight (set)	4xJ	6000	4650	5.61.40.H.SETA
	3xJ+1xAF	6000	4650	5.61.40.H.SETB
	4xW	6000	4650	5.61.45.H.SETA
	3xW+1xAG	6000	4650	5.61.45.H.SETB

AF	Fastening Set
	M8x25 Bolt
	M8 Spring Washer
	M8 Washer
	M14-M8 Hole Reducer Bolt

AG	Fastening Set
	M8x30 Bolt
	M8 Spring Washer
	M8 Washer
	M14-M8 Hole Reducer Bolt

J	Fastening Set
	M8x25 Bolt
	M8 Spring Washer
	M8 Washer
	M8 T Nut


W	Fastening Set
	M8x30 Bolt
	M8 Spring Washer
	M8 Washer
	M8 T Nut

Leveling Castor

Elementos de Piso



Material: Base- Carbon steel
Case- Aluminum
Wheel- Nylon 6

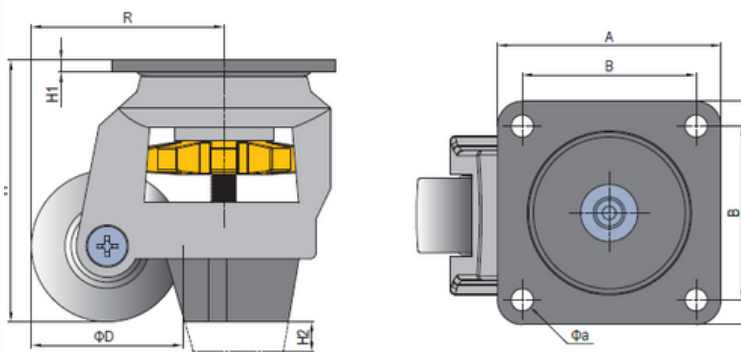

Description	Wheel Width (mm)	D (mm)	R (mm)	H (mm)	H (mm)	H (mm)	A (mm)	B (mm)	a (mm)	Load (g)	Mass (g)	Part No.
Leveling Castor	22	50	62	83	4	10	73	58	7	1700	0.69	5.62.60F
	29	62	77	102	5	12	90	70	9.5	3400	1.31	5.62.80F
	31	72	91	121	6	15	95	70	11.5	6700	1.75	5.62.120F



ELEMENTOS DE INSTALACIÓN DE PANELES



T Slot Reducing Profile
Panel Mounting Block
Panel Mounting Strip
Mounting Block

T Slot Reducing Profile

Elementos de Instalación de Paneles





Material: Black PVS


Reduce el ancho de la ranura para instalación de
páneles

To reduce slot width for panel installation




T Slot Reducing Profile-6





T Slot Reducing Profile-8



T Slot Reducing Profile-10



Description	Mass (g/m)	Delivery Length	Part No.
T Slot Reducing Profile-6	25		6.11.06
T Slot Reducing Profile-8	51	2000mm/bar	6.11.08
T Slot Reducing Profile-10	64		6.11.10

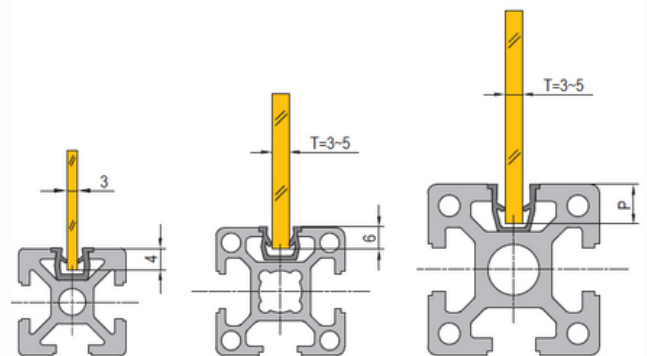

Panel Mounting Block


Elementos de Instalación de Páneos



Material: Black PVS

Usado para unir el panel con varios tipos de grosor al perfil



The block is used to attach the panel with various thickness to the profile

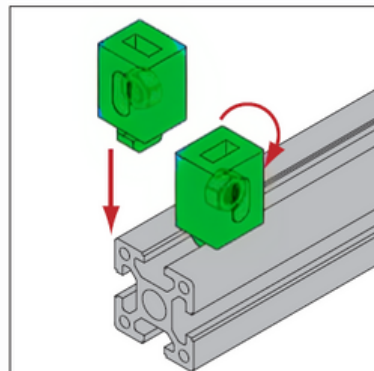

Panel Mounting Block-6






M5

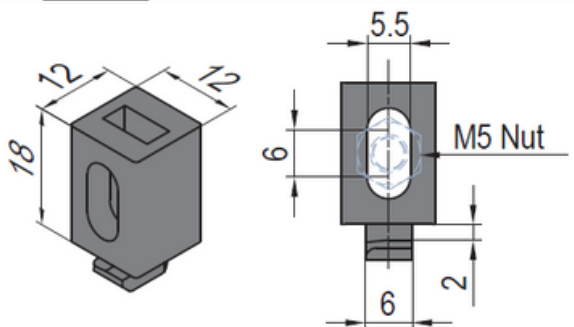

Panel Mounting Block-8






M6

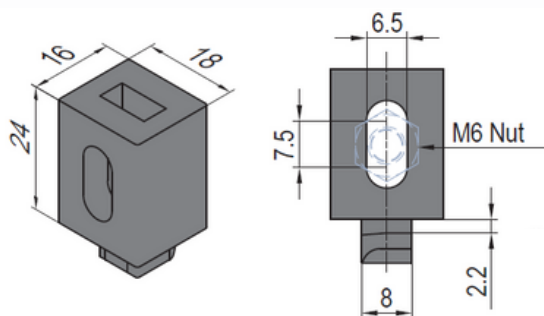





Panel Mounting Block-10-4






M6

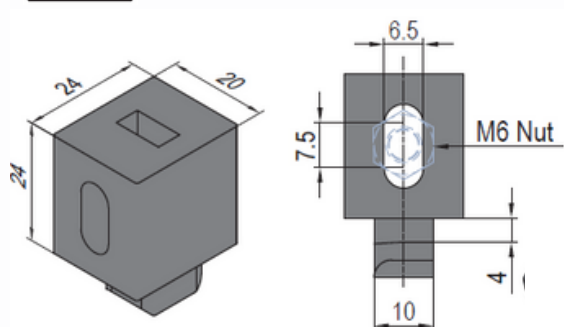

Panel Mounting Block-10-6

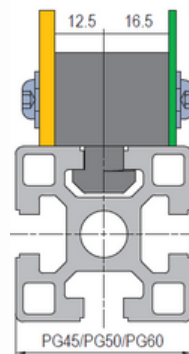

Description	PG	Fastening Set	Mass (g)	Part No.
Panel Mounting Block-6 (pcs)	PG20		4.4	6.21.06
Panel Mounting Block-6 (set)	PG20	1x FM	7	6.21.06.SET
Panel Mounting Block-8 (pcs)	PG30		9	6.21.08
Panel Mounting Block-8 (set)	PG30	1x FN	13.5	6.21.08.SET
Panel Mounting Block-10-4 (pcs)	PG40		15.8	6.21.10.04
Panel Mounting Block-10-4 (set)	PG40	1x FP	23.8	6.21.10.04.SET
Panel Mounting Block-10-6 (pcs)	PG45/50/60		20	6.21.10.06
Panel Mounting Block-10-6 (set)	PG45/50/60	1x FP	29	6.21.10.06.SET



Panel Mounting Strip

Elementos de Instalación de Páneles





Material: Gray PVS



Usado para unir paneles de 3mm-5mm de grosor al perfil. Comúnmente utilizado en cuarto limpio

To attach the panel with 3mm and 5mm thickness to the profile, widely used in clean room.



Panel Mounting Strip-8-5

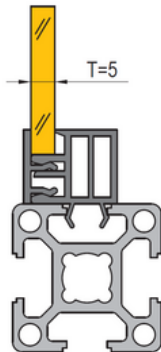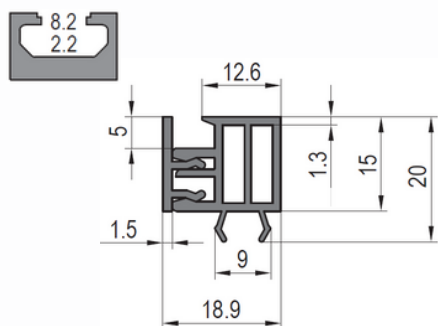

Panel Mounting Strip-10-4-3

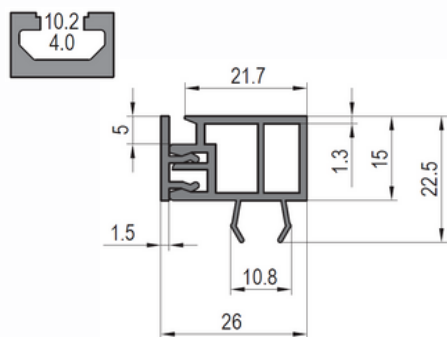

Panel Mounting Strip-10-4-5

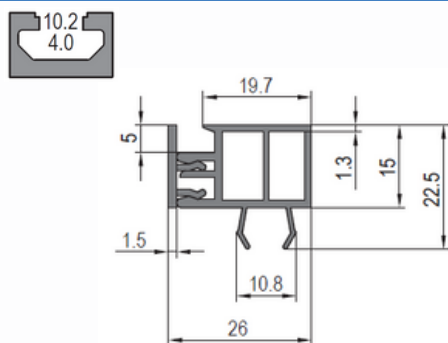

Description	PG	Mass	Delivery Length	Part No.
Panel Mounting Strip-8-5	PG30	220		6.31.08.02
Panel Mounting Strip-10-4-3	PG40	273	2000mm/bar	6.31.10.04.01
Panel Mounting Strip-10-4-5	PG40	260		6.31.10.04.02

Mounting Block




Elementos de Instalación de Páneos



Material: Diecast Zinc

Usado para unir el centro con $\varnothing 4$ al perfil estándar, el cual tiene mejores propiedades físicas.


Mounting block is used for fixing the mesh of $\varnothing 4$ to the standard profiles, which has a better physical property

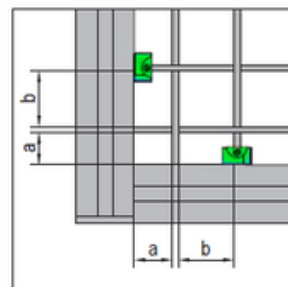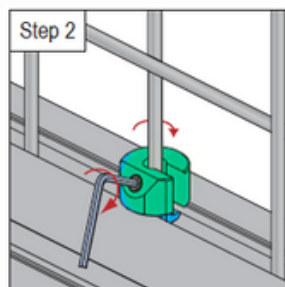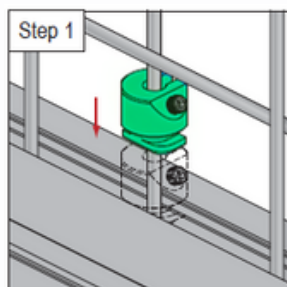

Mounting Block-8




M5x6

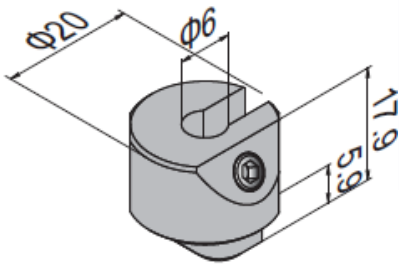


Mounting Block-10-4




M5x6

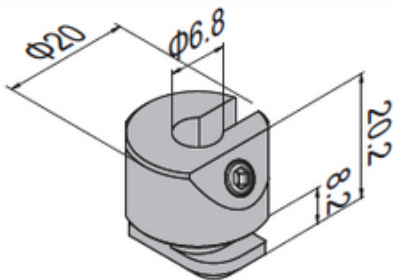

Mounting Block-10-6



M5x6

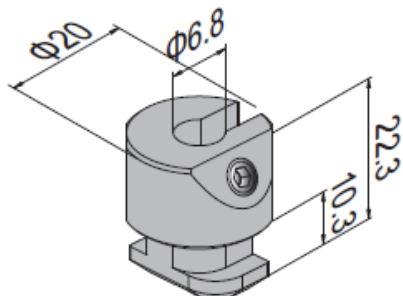

Description	PG	Mass (g/pcs)	Part No.
Mounting Block-8 (with top thread)	PG30	19	6.41.08.01
Mounting Block-10-4 (with top thread)	PG40	21	6.41.10.04.01
Mounting Block-10-6 (with top thread)	PG45/50/60	23	6.41.10.06.01

Note: The distance (a) between the nearest meshes and profiles have to be more than 20mm and less than $b+5\text{mm}$ (b is the distance of the meshes). And the optimum distance between mounting blocks is 300mm to ensure the structure intensity.

ELEMENTOS DE PUERTAS Y VENTANAS



Handle

Hinge

Lock

Magnet Catch

Door Lock


Sliding Door Profile



Handle

Elementos de puertas y ventanas



Material: PA6




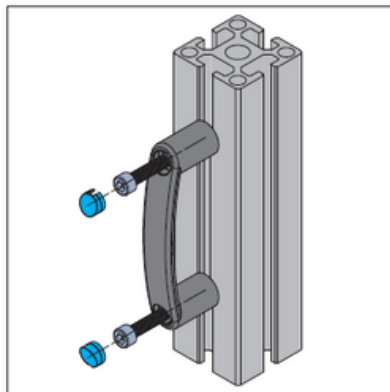


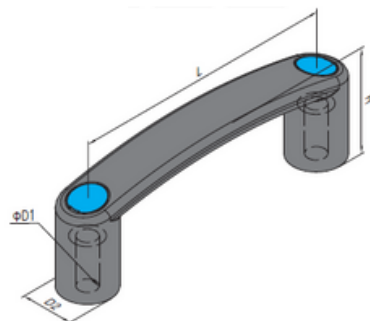

Description	PG	L (mm)	H (mm)	D1 (mm)	D2 (mm)	Fastening Set	Cap Color	Mass (g)	Part No.
PA6 Handle-90 (pcs)	PG15/20	90	36	6.5	18			23	7.11.90.06.BE
PA6 Handle-90 (set)	PG15/20	90	36	6.5	18	2x CA		41	7.11.90.06.BE.SET
PA6 Handle-90 (pcs)	PG15/20	90	36	6.5	18			23	7.11.90.06.BK
PA6 Handle-90 (set)	PG15/20	90	36	6.5	18	2x CA		41	7.11.90.06.BK.SET
PA6 Handle-90 (pcs)	PG30	90	36	6.5	18			23	7.11.90.08.BE
PA6 Handle-90 (set)	PG30	90	36	6.5	18	2x CB		45	7.11.90.08.BE.SET
PA6 Handle-90 (pcs)	PG30	90	36	6.5	18			23	7.11.90.08.BK
PA6 Handle-90 (set)	PG30	90	36	6.5	18	2x CB		45	7.11.90.08.BK.SET
PA6 Handle-120 (pcs)	PG30	120	40	8.5	25			45	7.11.120.08.BE
PA6 Handle-120 (set)	PG30	120	40	8.5	25	2x CB		68	7.11.120.08.BE.SET
PA6 Handle-120 (pcs)	PG30	120	40	8.5	25			45	7.11.120.08.BK
PA6 Handle-120 (set)	PG30	120	40	8.5	25	2x CB		68	7.11.120.08.BK.SET
PA6 Handle-120 (pcs)	PG40	120	40	8.5	25			45	7.11.120.10.04.BE
PA6 Handle-120 (set)	PG40	120	40	8.5	25	2x CD		88	7.11.120.10.04.BE.SET
PA6 Handle-120 (pcs)	PG40	120	40	8.5	25			45	7.11.120.10.04.BK
PA6 Handle-120 (set)	PG45/50/60	120	40	8.5	25	2x CD		88	7.11.120.10.04.BK.SET
PA6 Handle-120 (pcs)	PG45/50/60	120	40	8.5	25			45	7.11.120.10.06.BE
PA6 Handle-120 (set)	PG45/50/60	120	40	8.5	25	2x CE		104	7.11.120.10.06.BE.SET
PA6 Handle-120 (pcs)	PG45/50/60	120	40	8.5	25			45	7.11.120.10.06.BK
PA6 Handle-120 (set)	PG45/50/60	120	40	8.5	25	2x CE		104	7.11.120.10.06.BK.SET

Más vendido

Más vendido





Guard Wing Handle

Elementos de puertas y ventanas





Material: PA6

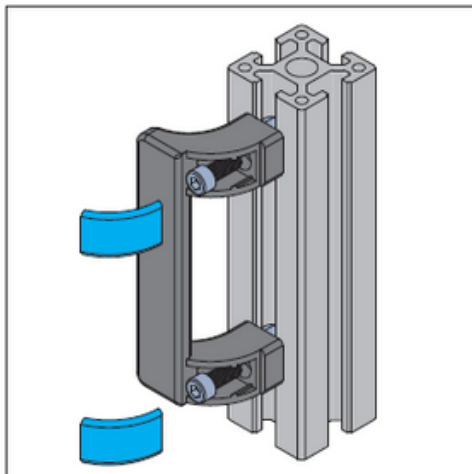

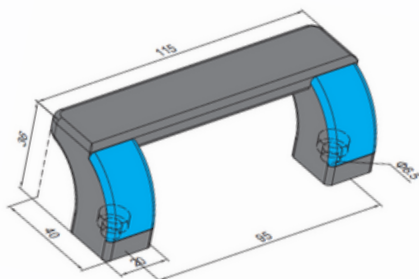

Description	PG	Fastening Set	Cap Color	Mass (g)	Part No.
Guard Wing Handle-95 (pc)	PG30			70	7.12.95.08.BE
Guard Wing Handle-95 (set)	PG30	2x CP		88	7.12.95.08.BE.SET
Guard Wing Handle-95 (pc)	PG30			70	7.12.95.08.BK
Guard Wing Handle-95 (set)	PG30	2x CP		88	7.12.95.08.BK.SET
Guard Wing Handle-95 (pc)	PG40/45/50/60			70	7.12.95.10.BE
Guard Wing Handle-95 (set)	PG40/45/50/60	2x CQ		96	7.12.95.10.BE.SET
Guard Wing Handle-95 (pc)	PG40/45/50/60			70	7.12.95.10.BK
Guard Wing Handle-95 (set)	PG40/45/50/60	2x CQ		96	7.12.95.10.BK.SET







Aluminium Handle

Elementos de puertas y ventanas



Material: Handle- Aluminium
Cap- ABS

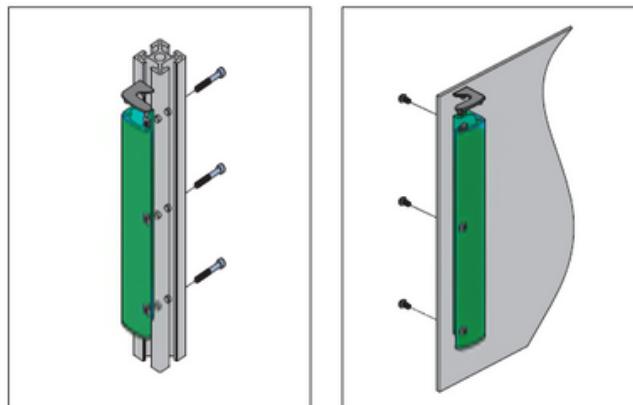

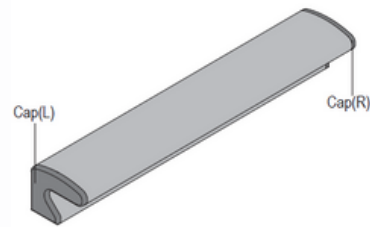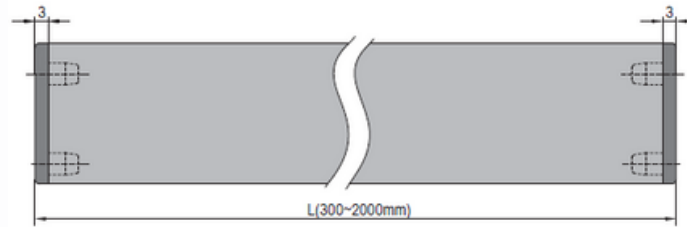

Application	Description	Cap Color	L (mm)	Fastening Set	Mass (g)	Part No.
4mm Panel	Aluminum Handle (pc)		300		216	7.13.P.GY
	Aluminum Handle (set)			3xPA	224	7.13.P.GY.SET
	Aluminum Handle (pc)				216	7.13.P.BK
	Aluminum Handle (set)			3xPA	224	7.13.P.BK.SET
PG40/45 	Aluminum Handle (pc)				216	7.13.10.GY
	Aluminum Handle (set)			3xPB	231	7.13.10.GY.SET
	Aluminum Handle (pc)				216	7.13.10.BK
	Aluminum Handle (set)			3xPB	231	7.13.10.BK.SET

Single supply including 3 of M5 T Nuts (Reference No. 2.21.06.M5)


PA	Fastening Set	PB	Fastening Set
	M5x10 Bolt		M5x35 Bolt
	M5 Washer		M5 T Nut
	M5 T Nut		



Hinge

Elementos de puertas y ventanas



Material: PA6

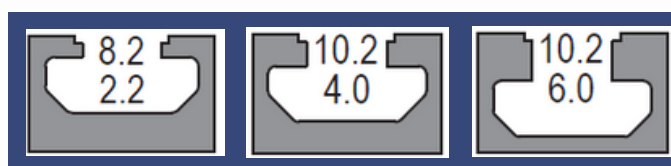


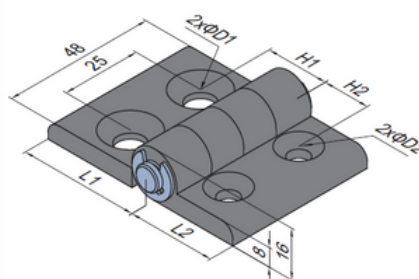



Description	H1 (mm)	H2 (mm)	L1 (mm)	L2 (mm)	D1 (mm)	D2 (mm)	Fastening Set	Mass (g)	Part No.
30/30 (pcs)	15	15	28	28	6.5	6.5		39	7.21.30.30
30/30 (set)	15	15	28	28	6.5	6.5	4xFL	73	7.21.30.30.SET
30/40 (pcs)	20	15	38	28	8.5	6.5		42	7.21.30.40
30/40 (set)	20	15	38	28	8.5	6.5	2xFG+2xFL	88	7.21.30.40.SET
30/45 (pcs)	22.5	15	43	28	8.5	6.5		44	7.21.30.45
30/45 (set)	22.5	15	43	28	8.5	6.5	2xFG+2xFL	81	7.21.30.45.SET
40/40 (pcs)	20	20	38	38	8.5	8.5		45	7.21.40.40
40/40 (set)	20	20	38	38	8.5	8.5	4xFG	108	7.21.40.40.SET
40/45 (pcs)	22.5	20	43	38	8.5	8.5		47	7.21.40.45
40/45 (set)	22.5	20	43	38	8.5	8.5	4xFG	110	7.21.40.45.SET
45/45 (pcs)	22.5	22.5	43	43	8.5	8.5		49	7.21.45.45
45/45 (set)	22.5	22.5	43	43	8.5	8.5	4xFG	112	7.21.45.45.SET

Más vendido

Más vendido



Fmax=300N






Hinge

Elementos de puertas y ventanas




Material: Aluminium Countersink Hole




Light Hinge

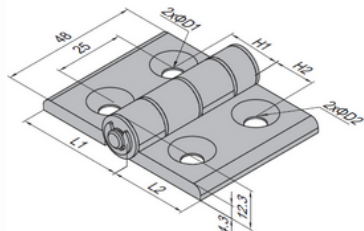




Description	H1 (mm)	H2 (mm)	L1 (mm)	L2 (mm)	D1 (mm)	D2 (mm)	Fastening Set	Mass (g)	Part No.
30/30 (pcs)	15	15	28	28	6.5	6.5		41	7.22.30.30.E
30/30 (set)	15	15	28	28	6.5	6.5	4xDJ	65	7.22.30.30.E.SET
30/40 (pcs)	20	15	38	28	6.5	6.5		46	7.22.30.40.E
30/40 (set)	20	15	38	28	6.5	6.5	2xDJ+2xFL	80	7.22.30.40.E.SET
30/45 (pcs)	22.5	15	38	28	6.5	6.5		46	7.22.30.45.E
30/45 (set)	22.5	15	38	28	6.5	6.5	2xDJ+2xDL	80	7.22.30.45.E.SET
40/40 (pcs)	20	20	38	38	6.5	6.5		51	7.22.40.40.E
40/40 (set)	20	20	38	38	6.5	6.5	4xFL	94	7.22.40.40.E.SET
40/45 (pcs)	22.5	20	38	38	6.5	6.5		51	7.22.40.45.E
40/45 (set)	22.5	20	38	38	6.5	6.5	2xFL+2xDL	95	7.22.40.45.E.SET
45/45 (pcs)	22.5	22.5	38	38	6.5	6.5		51	7.22.45.45.E
45/45 (set)	22.5	22.5	38	38	6.5	6.5	4xDL	96	7.22.45.45.E.SET




F_{max}=300N




Hinge- Aluminium Countersink Hole






Description	Fastening Set	Mass (g)	Part No.
20/20 (pcs)		15	7.22.20.20
20/20 (set)	4xFE	25	7.22.20.20.SET




F_{max}=150N





Hinge- Aluminium Countersink Hole






Description	H1 (mm)	H2 (mm)	L1 (mm)	L2 (mm)	D1 (mm)	D2 (mm)	Fastening Set	Mass (g)	Part No.
30/30 (pcs)	15	15	28	28	6.5	6.5		69	7.22.30.30
30/30 (set)	15	15	28	28	6.5	6.5	4x FF	97	7.22.30.30.SET
30/40 (pcs)	20	15	38	28	8.5	6.5		74	7.22.30.40
30/40 (set)	20	15	38	28	8.5	6.5	2x FF +2x FG	122	7.22.30.40.SET
30/45 (pcs)	22.5	15	38	28	8.5	6.5		74	7.22.30.45
30/45 (set)	22.5	15	38	28	8.5	6.5	2x FF +2x FG	122	7.22.30.45.SET
40/40 (pcs)	20	20	38	38	8.5	8.5		81	7.22.40.40
40/40 (set)	20	20	38	38	8.5	8.5	4x FG	149	7.22.40.40.SET
40/45 (pcs)	22.5	20	38	38	8.5	8.5		81	7.22.40.45
40/45 (set)	22.5	20	38	38	8.5	8.5	4x FG	149	7.22.40.45.SET
40/50 (pcs)	25	20	43	38	8.5	8.5		84	7.22.40.50
40/50 (set)	25	20	43	38	8.5	8.5	4x FG	152	7.22.40.50.SET
45/45 (pcs)	22.5	22.5	38	38	8.5	8.5		81	7.22.45.45
45/45 (set)	22.5	22.5	38	38	8.5	8.5	4x FG	149	7.22.45.45.SET
45/50 (pcs)	25	22.5	43	38	8.5	8.5		84	7.22.45.50
45/50 (set)	25	22.5	43	38	8.5	8.5	4x FG	152	7.22.45.50.SET
50/50 (pcs)	25	25	43	43	8.5	8.5		84	7.22.50.50
50/50 (set)	25	25	43	43	8.5	8.5	4x FG	155	7.22.50.50.SET




F_{max}=400N




Hinge- Aluminium Through Hole





Description	Fastening Set	Mass (g)	Part No.
20/20 (pcs)		15	7.23.20.20
20/20 (set)	4x PC	29	7.23.20.20.SET






F_{max}=150N



Hinge- Aluminium Through Hole

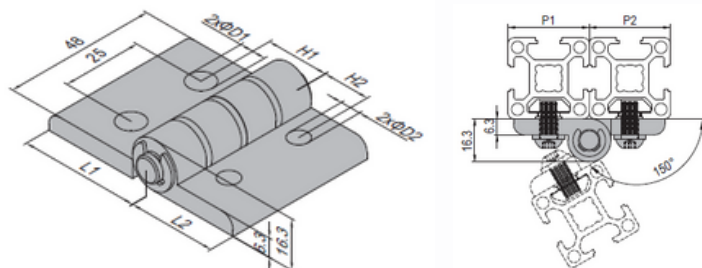

Description	H1 (mm)	H2 (mm)	L1 (mm)	L2 (mm)	D1 (mm)	D2 (mm)	Fastening Set	Mass (g)	Part No.
30/30 (pcs)	15	15	28	28	6.5	6.5		71	7.23.30.30
30/30 (set)	15	15	28	28	6.5	6.5	4x FH	99	7.23.30.30.SET
30/40 (pcs)	20	15	38	28	8.5	6.5		76	7.23.30.40
30/40 (set)	20	15	38	28	8.5	6.5	2x FH +2x FJ	124	7.23.30.40.SET
30/45 (pcs)	22.5	15	38	28	8.5	6.5		76	7.23.30.45
30/45 (set)	22.5	15	38	28	8.5	6.5	2x FH +2x FK	127	7.23.30.45.SET
40/40 (pcs)	20	20	38	38	8.5	8.5		83	7.23.40.40
40/40 (set)	20	20	38	38	8.5	8.5	4x FJ	151	7.23.40.40.SET
40/45 (pcs)	22.5	20	38	38	8.5	8.5		83	7.23.40.45
40/45 (set)	22.5	20	38	38	8.5	8.5	2x FJ +2x FK	156	7.23.40.45.SET
40/50 (pcs)	25	20	43	38	8.5	8.5		87	7.23.40.50
40/50 (set)	25	20	43	38	8.5	8.5	2x FJ +2x FK	159	7.23.40.50.SET
45/45 (pcs)	22.5	22.5	38	38	8.5	8.5		83	7.23.45.45
45/45 (set)	22.5	22.5	38	38	8.5	8.5	4x FK	161	7.23.45.45.SET
45/50 (pcs)	25	22.5	43	38	8.5	8.5		87	7.23.45.50
45/50 (set)	25	22.5	43	38	8.5	8.5	4x FK	167	7.23.45.50.SET
50/50 (pcs)	25	25	43	43	8.5	8.5		87	7.23.50.50
50/50 (set)	25	25	43	43	8.5	8.5	4x FK	164	7.23.50.50.SET




Hinge


Elementos de puertas y ventanas





Material: Aluminium





$F_{max}=200N$

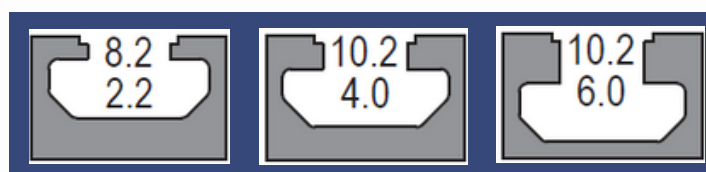



Hinge- Aluminium Countersink Hole

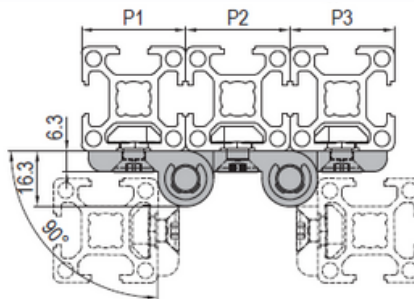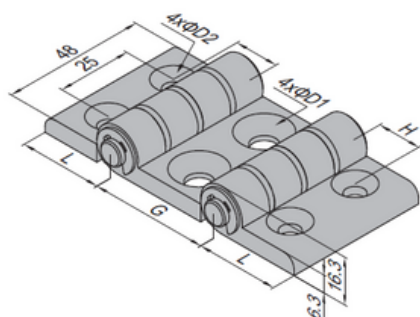




Description	G (mm)	H (mm)	L (mm)	D1 (mm)	D2 (mm)	Fastening Set	Mass (g)	Part No.
30/30/30 (pcs)	30	15	28	6.5	6.5		98	7.24.30.30.30
30/30/30 (set)	30	15	28	6.5	6.5	6x FF	140	7.24.30.30.30.SET
30/30/40 (pcs)	40	15	28	6.5	6.5		104	7.24.30.40.30
30/40/30 (set)	40	15	28	6.5	6.5	4x FF +2x FG	166	7.24.30.40.30.SET
30/45/30 (pcs)	45	15	28	6.5	6.5		108	7.24.30.45.30
30/45/30 (set)	45	15	28	6.5	6.5	4x FF +2x FG	170	7.24.30.45.30.SET
40/40/40 (pcs)	40	20	38	8.5	8.5		115	7.24.40.40.40
40/40/40 (set)	40	20	38	8.5	8.5	6x FG	217	7.24.40.40.40.SET
40/45/40 (pcs)	45	20	38	8.5	8.5		119	7.24.40.45.40
40/45/40 (set)	45	20	38	8.5	8.5	6x FG	221	7.24.40.45.40.SET
45/45/45 (pcs)	45	22.5	38	8.5	8.5		119	7.24.45.45.45
45/45/45 (set)	45	22.5	38	8.5	8.5	6x FG	221	7.24.45.45.45.SET



Hinge- Aluminium Through Hole

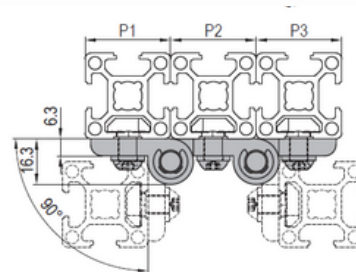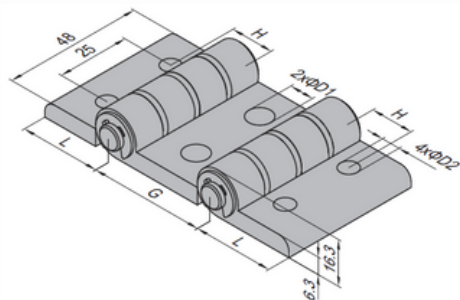

Description	G (mm)	H (mm)	L (mm)	D1 (mm)	D2 (mm)	Fastening Set	Mass (g)	Part No.
30/30/30 (pcs)	30	15	28	6.5	6.5		100	7.25.30.30.30
30/30/30 (set)	30	15	28	6.5	6.5	6x FH	142	7.25.30.30.30.ST
30/40/30 (pcs)	40	15	28	8.5	6.5		107	7.25.30.40.30
30/40/30 (set)	40	15	28	8.5	6.5	4x FH +2x FJ	169	7.25.30.40.30.ST
30/45/30 (pcs)	45	15	28	8.5	6.5		111	7.25.30.45.30
30/45/30 (set)	45	15	28	8.5	6.5	4x FH +2x FK	175	7.25.30.45.30.ST
40/40/40 (pcs)	40	20	38	8.5	8.5		121	7.25.40.40.40
40/40/40 (set)	40	20	38	8.5	8.5	6x FJ	213	7.25.40.40.40.ST
40/45/40 (pcs)	45	20	38	8.5	8.5		125	7.25.40.45.40
40/45/40 (set)	45	20	38	8.5	8.5	4x FJ +2x FK	230	7.25.40.45.40.ST
45/45/45 (pcs)	45	22.5	38	8.5	8.5		125	7.25.45.45.45
45/45/45 (set)	45	22.5	38	8.5	8.5	6x FK	245	7.25.45.45.45.ST




Hinge




Elementos de puertas y ventanas





Material: Aluminium




$F_{max}=400N$

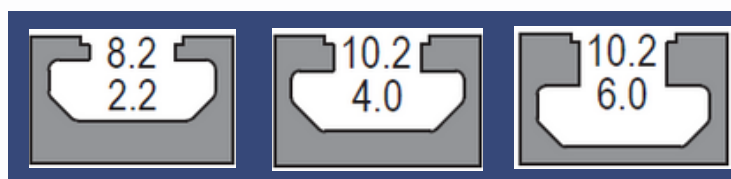

Hinge- AI Removable Hinge L

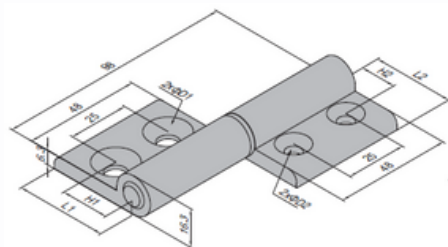

Hinge- AI Removable Hinge R

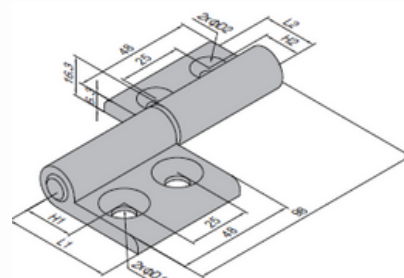

Description	H1 (mm)	H2 (mm)	L1 (mm)	L2 (mm)	D1 (mm)	D2 (mm)	Fastening Set	Mass (g)	Part No. (L)	Part No. (R)
30/30 (pcs)	15	15	28	28	6.5	6.5		105	7.26.30.30	7.27.30.30
30/30 (set)	15	15	28	28	6.5	6.5	4x FF	133	7.26.30.30.ST	7.27.30.30.ST
30/40 (pcs)	20	15	38	28	8.5	6.5		110	7.26.30.40	7.27.30.40
30/40 (set)	20	15	38	28	8.5	6.5	2x FF +2x FG	158	7.26.30.40.ST	7.27.30.40.ST
30/45 (pcs)	22.5	15	38	28	8.5	6.5		110	7.26.30.45	7.27.30.45
30/45 (set)	22.5	15	38	28	8.5	6.5	2x FF +2x FG	158	7.26.30.45.ST	7.27.30.45.ST
40/40 (pcs)	20	20	38	38	8.5	8.5		118	7.26.40.40	7.27.40.40
40/40 (set)	20	20	38	38	8.5	8.5	4x FG	186	7.26.40.40.ST	7.27.40.40.ST
40/45 (pcs)	22.5	20	38	38	8.5	8.5		118	7.26.40.45	7.27.40.45
40/45 (set)	22.5	20	38	38	8.5	8.5	4x FG	186	7.26.40.45.ST	7.27.40.45.ST
40/50 (pcs)	25	20	43	38	8.5	8.5		121	7.26.40.50	7.27.40.50
40/50 (set)	25	20	43	38	8.5	8.5	4x FG	189	7.26.40.50.ST	7.27.40.50.ST
45/45 (pcs)	22.5	22.5	38	38	8.5	8.5		118	7.26.45.45	7.27.45.45
45/45 (set)	22.5	22.5	38	38	8.5	8.5	4x FG	186	7.26.45.45.ST	7.27.45.45.ST
45/50 (pcs)	25	22.5	43	38	8.5	8.5		121	7.26.45.50	7.27.45.50
45/50 (set)	25	22.5	43	38	8.5	8.5	4x FG	189	7.26.45.50.ST	7.27.45.50.ST
50/50 (pcs)	25	25	43	43	8.5	8.5		121	7.26.50.50	7.27.50.50
50/50 (set)	25	25	43	43	8.5	8.5	4x FG	192	7.26.50.50.ST	7.27.50.50.ST




FF	Fastening Set	FG	Fastening Set
	M6x12 Bolt		M8x16 Bolt
	M6 T Nut		M8 T Nut

Hinge



Elementos de puertas y ventanas



Material: Aluminium

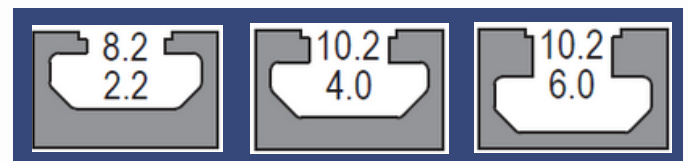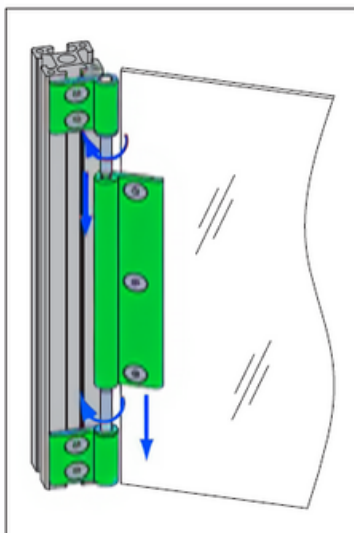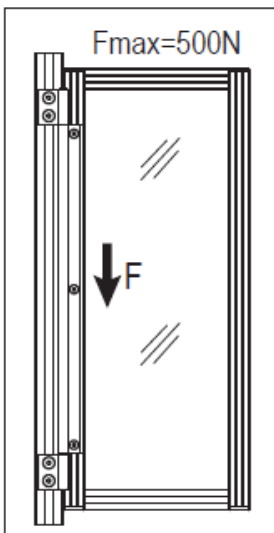

Hinge- Long Aluminium Hinge

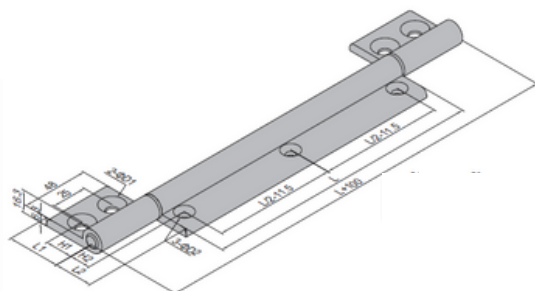


Description	H1 (mm)	H2 (mm)	L1 (mm)	L2 (mm)	D1 (mm)	D2 (mm)	L (mm)	Fastening Set	Mass (g)	Part No. (L)
30/30 (pcs)	15	15	28	28	6.5	6.5	500		515	7.28.30.30
30/30 (set)	15	15	28	28	6.5	6.5		7x FF	571	7.28.30.30.ST
30/40 (pcs)	20	15	38	28	8.5	6.5			525	7.28.30.40
30/40 (set)	20	15	38	28	8.5	6.5		3x FF +4x FG	617	7.28.30.40.ST
30/45 (pcs)	22.5	15	38	28	8.5	6.5			525	7.28.30.45
30/45 (set)	22.5	15	38	28	8.5	6.5		3x FF +4x FG	617	7.28.30.45.ST
40/40 (pcs)	20	20	38	38	8.5	8.5			605	7.28.40.40
40/40 (set)	20	20	38	38	8.5	8.5		7x FG	724	7.28.40.40.ST
40/45 (pcs)	22.5	20	38	38	8.5	8.5			605	7.28.40.45
40/45 (set)	22.5	20	38	38	8.5	8.5		7x FG	724	7.28.40.45.ST
40/50 (pcs)	22.5	22.5	38	38	8.5	8.5			605	7.28.40.50
40/50 (set)	22.5	22.5	38	38	8.5	8.5		7x FG	724	7.28.40.50.ST

Note: The length could be customized according to customer's requirements (100~1000)

FF	Fastening Set	FG	Fastening Set
	M6x12 Bolt		M8x16 Bolt
	M6 T Nut		M8 T Nut

Lock



Elementos de puertas y ventanas

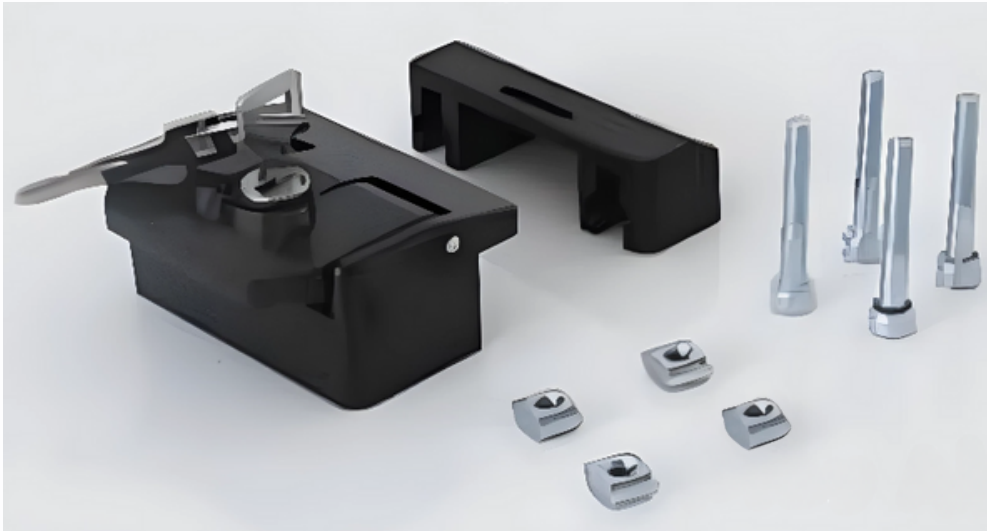


Material: Die cast Zinc, black electrophoresis

Seguro de metal compacto con un diseño de auto-seguro

Compact metal lock with self-locking design

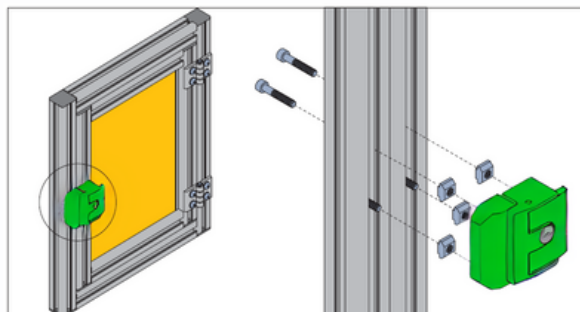

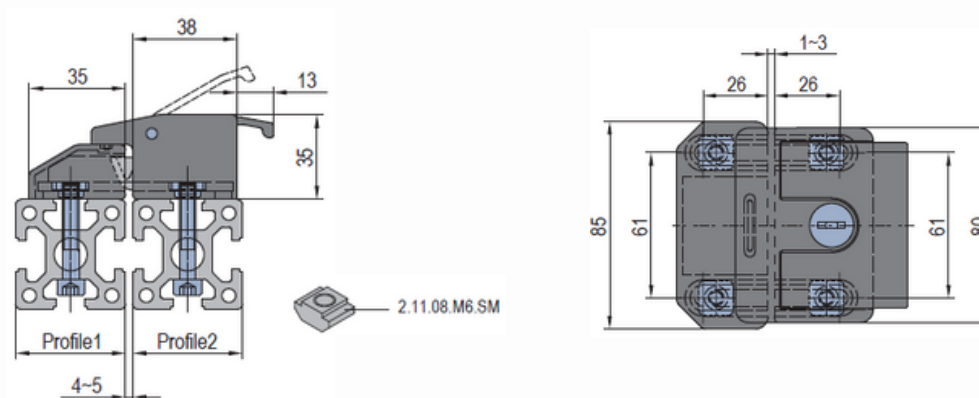

Description	Profile 1	Profile 2	Fastening Set	Mass (g)	Part No.
Lock (pcs)				690	7.31
Lock-3030 (set)	PG30 30	PG30 30	4x EL	719	7.31.30.30
Lock-4030 (set)	PG40 40	PG30 30	2x EL 2x EM	724	7.31.40.30
Lock-4040 (set)	PG40 40	PG40 40	4x EM	728	7.31.40.40
Lock-4530 (set)	PG45 45	PG30 30	2x EL 2x EM	726	7.31.45.30
Lock-4540 (set)	PG45 45	PG40 40	2x EM 2x EN	731	7.31.45.40
Lock-4545 (set)	PG45 45	PG45 45	4x EM	733	7.31.45.45

EL Fastening Set




EM Fastening Set



EN Fastening Set




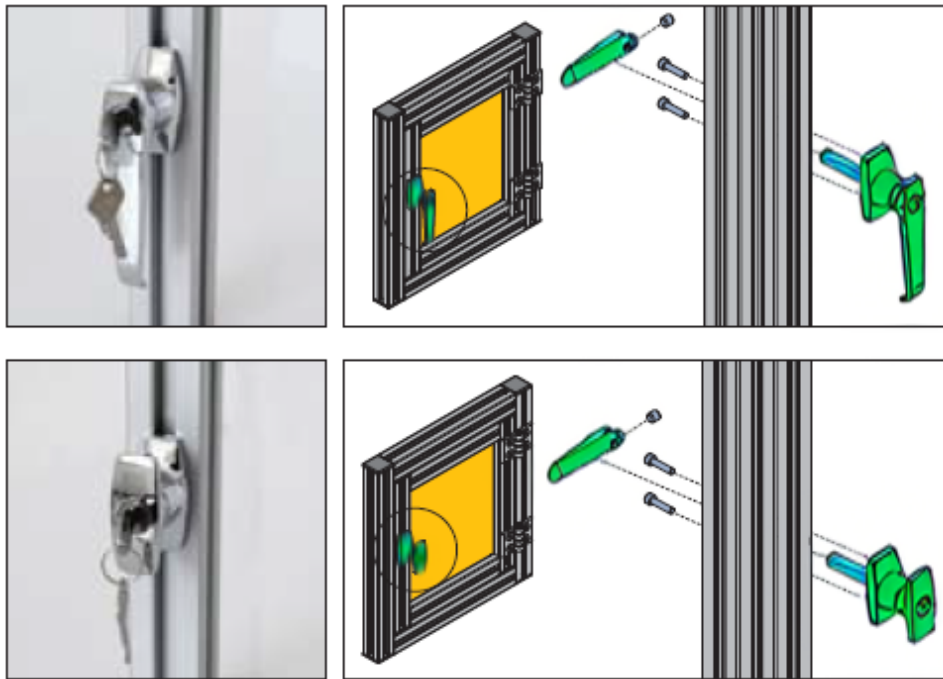


Material: Zinc Alloy, polish finish

Seguro de metal compacto con un diseño de auto-seguro



Compact metal lock with self-locking design







L Lock

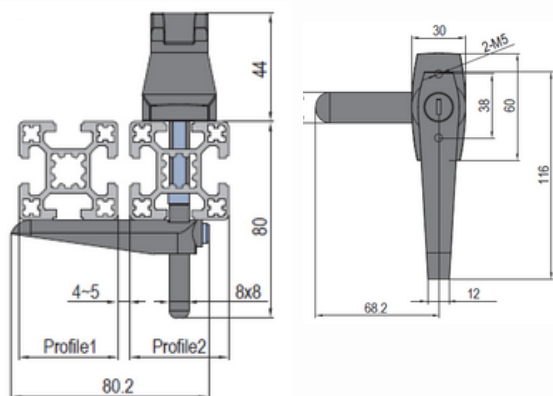

T Lock

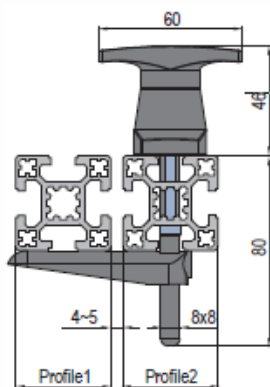


Description	Profile 1	Profile 2	Fastening Set	Mass (g)	Part No.
L Lock-3030	PG30	PG30	DH+2xEG	290	7.32.30.30
L Lock-4030	PG40	PG30	DH+2xEG	290	7.32.40.30
L Lock-4530	PG45	PG30	DH+2xEG	290	7.32.45.30
L Lock-4040	PG40	PG40	DH+2xEH	294	7.32.40.40
L Lock-4540	PG45	PG40	DH+2xEH	294	7.32.45.30
L Lock-5040	PG50	PG40	DH+2xEH	294	7.32.50.40
L Lock-4545	PG45	PG45	DH+2xEK	296	7.32.45.45
L Lock-5045	PG50	PG45	DH+2xEK	296	7.32.50.45
L Lock-5050	PG50	PG50	DH+2xEK	296	7.32.50.50
T Lock-3030	PG30	PG30	DH+2xEG	270	7.33.30.30
T Lock-4030	PG40	PG30	DH+2xEG	270	7.33.40.30
T Lock-4530	PG45	PG30	DH+2xEG	270	7.33.45.30
T Lock-4040	PG40	PG40	DH+2xEH	274	7.33.40.40
T Lock-4540	PG45	PG40	DH+2xEH	274	7.33.45.40
T Lock-5040	PG50	PG40	DH+2xEH	274	7.33.50.40
T Lock-4545	PG45	PG45	DH+2xEK	276	7.33.45.45
T Lock-5045	PG50	PG45	DH+2xEK	276	7.33.50.45
T Lock-5050	PG50	PG50	DH+2xEK	276	7.33.50.50



Magnet Catch


Elementos de puertas y ventanas

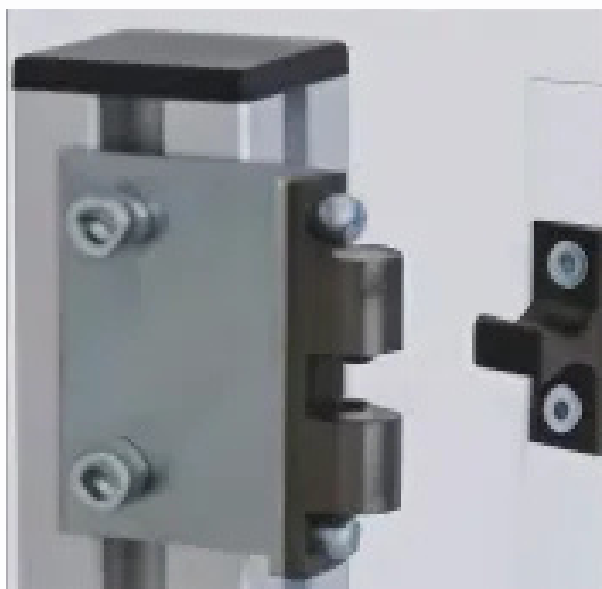


Material: Magnet Catch-Aluminium alloy
Connectors- Zinc plated steel

Cuando el magnet catch es instalado en el marco inferior para puertas, la puerta debe ser mayor a 400mm

When the magnet catch is installed on the lower door frame, the door should be more than 400mm










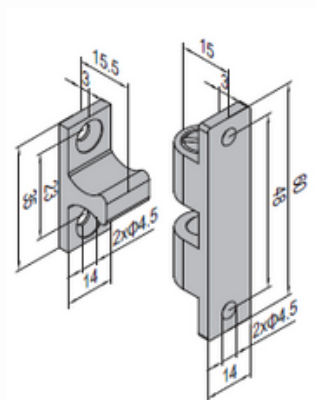

Tighten Status 1



Tighten Status 2

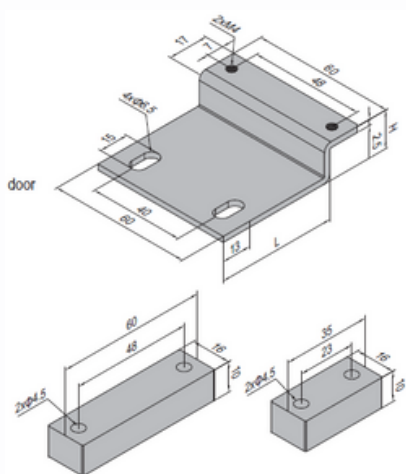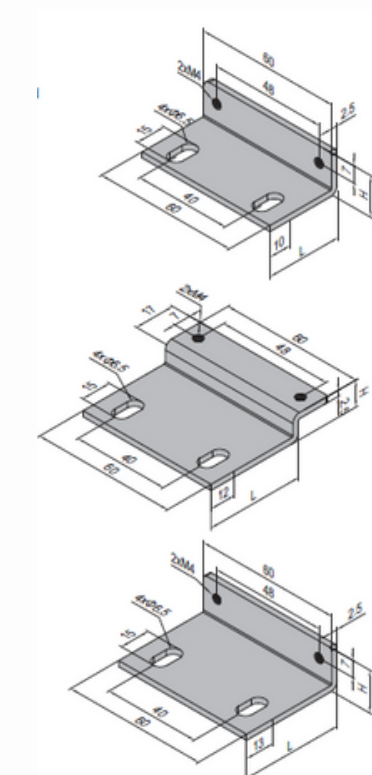

Description	L (mm)	H (mm)	Fastening Set	Mass (g)	Part No.
Magnet Catch-14 (pcs)				26	7.41.14
Magnet Catch-14 (Profile 3030 for Door, Profile 3030 for Doorframe set No.1)	31	17	2x CF +2x PF +2x CJ	130	7.41.14.3030.ST
Magnet Catch-14 (Profile 3030 for Door, Profile 4545 for Doorframe set No.2)	41	11	2x CF +2x PF +2x CK	139	7.41.14.3040.ST
Magnet Catch-14 (Profile 3030 for Door, Profile 4545 for Doorframe set No.3)	42	14	2x CF +2x PF +2x CN	145	7.41.14.3045.ST



CF Fastening Set	PF Fastening Set	CJ Fastening Set	CK Fastening Set	CN Fastening Set
 M4x10 Bolt  M4 T Nut	 M4x8 Bolt  M4 Spring Bolt  M4 Washer	 M6x10 Bolt  M6 Spring Washer  M6 T Nut	 M6x14 Bolt  M6 Spring Washer  M6 T Nut	 M6x16 Bolt  M6 Spring Washer  M6 T Nut

Description	L (mm)	H (mm)	Fastening Set	Mass (g)	Part No.
Magnet Catch-14 (Profile 4040 for Door, Profile 4040 for Doorframe set No.1)	45	17	2x CG +2x PF +2x CK	147	7.41.14.4040.ST
Magnet Catch-14 (Profile 4040 for Door, Profile 4545 for Doorframe set No.4)	51	16	2x CG +2x PF +2x CN	151	7.41.14.4045.ST
Magnet Catch-14 (Profile 4040 for Door, Profile 4080 for Doorframe set No.5)			2x CL +2x CY	255	7.41.14.4080.ST
Magnet Catch-14 (Profile 4040 for Door, Profile 5050 for Doorframe set No.4)	51	11	2x CG +2x PF +2x CN	145.5	7.41.14.4050.ST
Magnet Catch-14 (Profile 4545 for Door, Profile 4545 for Doorframe set No.1)	45	17	2x CG +2x PF +2x CN	151	7.41.14.4545.ST
Magnet Catch-14 (Profile 4545 for Door, Profile 5050 for Doorframe set No.4)	51	16	2x CG +2x PF +2x CN	151	7.41.14.4550.ST
Magnet Catch-14 (Profile 5050 for Door, Profile 5050 for Doorframe set No.1)	50	17	2x CG +2x PF +2x CN	149	7.41.14.5050.ST




CG Fastening Set	PF Fastening Set	CK Fastening Set	CL Fastening Set	CY Fastening Set	CN Fastening Set
 M4x14 Bolt  M4 T Nut	 M4x8 Bolt  M4 Spring Bolt  M4 Washer	 M6x14 Bolt  M6 Spring Washer  M6 T Nut	 M4x25 Bolt  M4 Spring Washer  M4 T Nut	 M4x20 Bolt  M4 T Nut	 M6x16 Bolt  M6 Spring Washer  M6 T Nut

Door Lock

Elementos de puertas y ventanas



Material: Block- diecast aluminum, black electrophoresis
Door Lock - Black electrophoresis

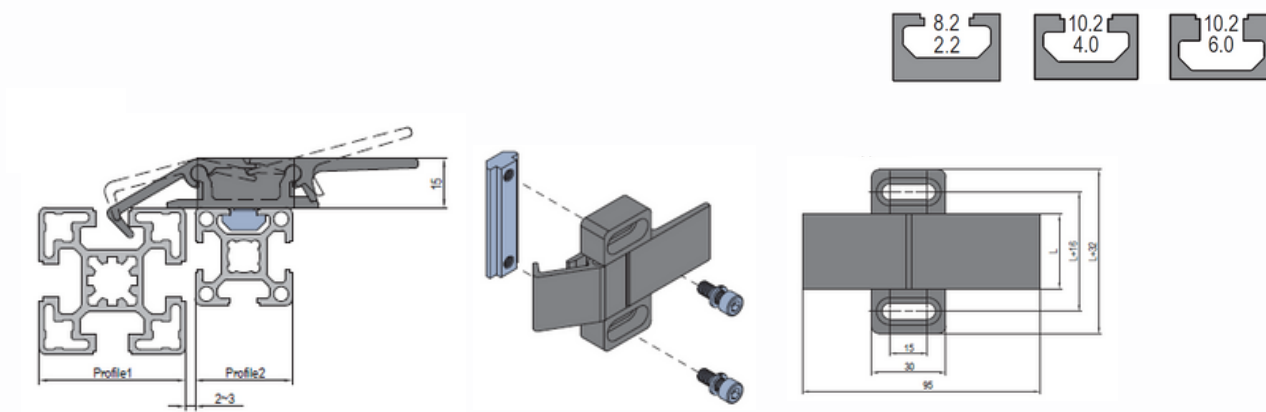


Description	Profile 1	Profile 2	L (mm)	Fastening Set	Mass (g)	Part No.
Door Locks-3040	PG40	PG30	30	2x CU +1+ EP	115	7.42.30.3040
Door Locks-3045	PG45	PG30	30	2x CU +1+ EP	115	7.42.30.3045
Door Locks-4040	PG40	PG40	30	2x CU +1+ EP	140	7.42.30.4040
Door Locks-4045	PG45	PG40	50	2x CU +1+ EP	185	7.42.30.4045
Door Locks-4545	PG45	PG45	50	2x CV +1+ EP	187	7.42.30.4545

Note: Including block and special nut

CU Fastening Set	CV Fastening Set	EP Fastening Set
 M6x16 Bolt  M6 Spring Washer	 M6x20 Bolt  M6 Spring Washer	 Special Nut

Door Lock

Elementos de puertas y ventanas


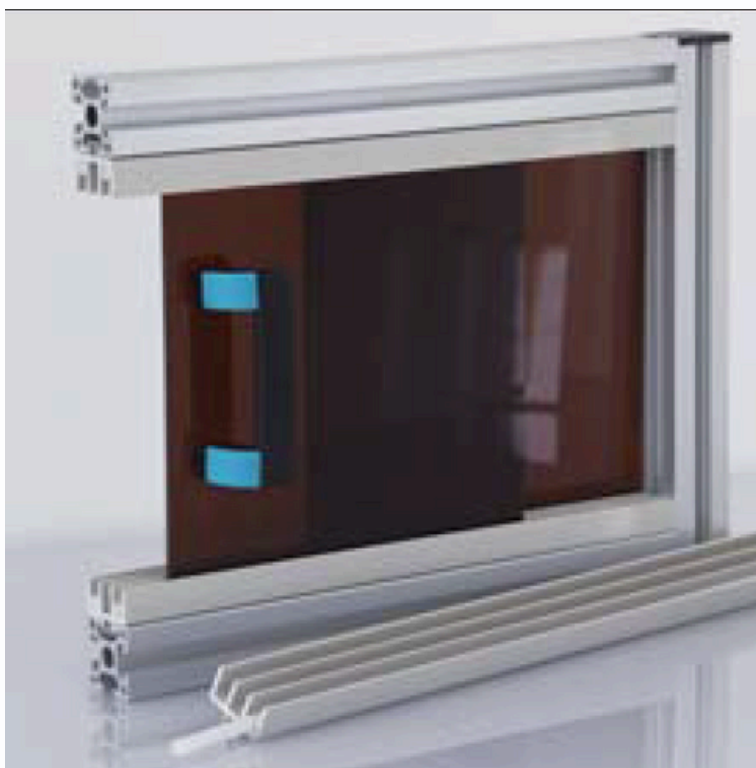


Material: PE Bar- HD-PE
Sliding door profile- PVC



El perfil para puerta deslizador se coloca en el perfil estructural y es recomendado para puertas deslizadoras de poco peso

The sliding door profile clips into strut profiles and is suitable for light-weight sliding doors.

Sliding door Profile-8

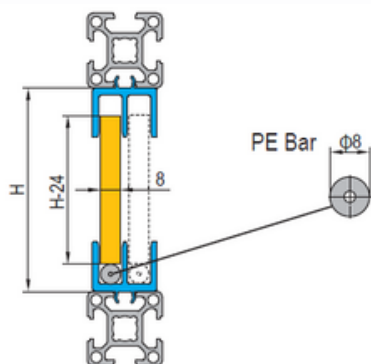

Sliding door Profile-10-4

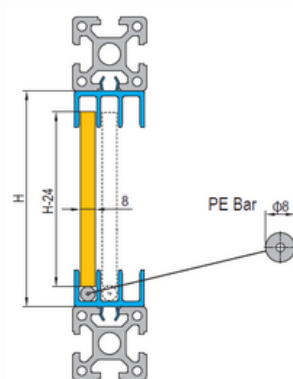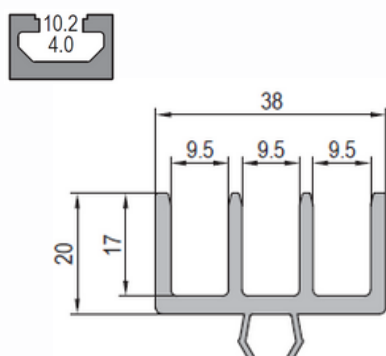

Description	PG	Mass (g/m)	Delivery Length	Part No.
Sliding Door Profile-8	PG30	330	3000mm/bar	7.51.08
Sliding Door Profile-8 (Including 2 pcs PE bar)	PG30	390		7.51.08.ST
Sliding Door Profile-10-4	PG40	450		7.51.10.04
Sliding Door Profile-10-4 (Including 2 pcs PE bar)	PG40	510		7.51.10.04.02.ST
Sliding Door Profile-10-4 (Including 3 pcs PE bar)	PG40	540		7.51.10.04.03.ST

ACCESORIOS ADICIONALES



Suspended Glider
Swivel Angle Plate
Potential qualiser Nut
Joint
Frame Joint
Mounting Adaptor for Roller
Telescope unit.

Suspended Glider


Accesorios Adicionales




Material: Glider-PA6+ GF30
Hook- Zinc plated steel

El gancho deslizable puede suspenderse de la ranura del perfil

The glider can be suspended in profile slot.

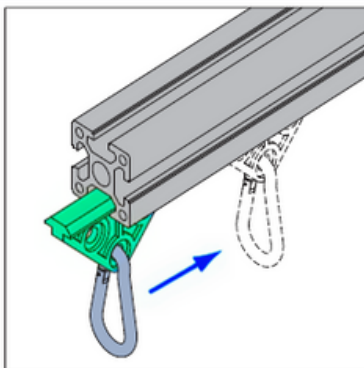


Suspended Glider-8

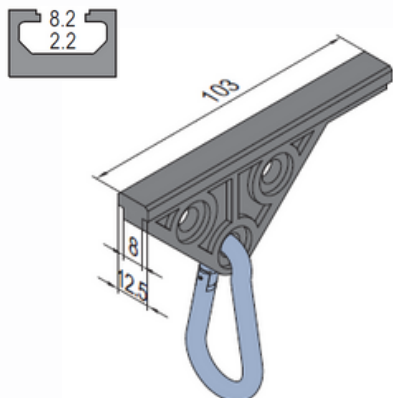

Description	Static Load (N)	Mass (g)	Part No.
Suspended Glider-8	200	48	8.11.08

Suspended Glider-10

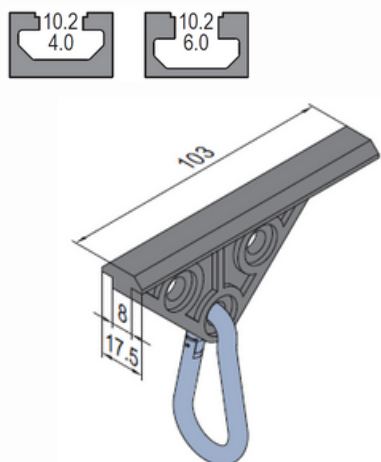

Description	Static Load (N)	Mass (g)	Part No.
Suspended Glider-10	200	48	8.11.10

Swivel Angle Plate


Accesorios Adicionales





Material: Steel, black electrophoresis

Infinitas variables para ajustar la inclinación al ángulo deseado





Infinitely variable adjusting of inclination with swivel angle.

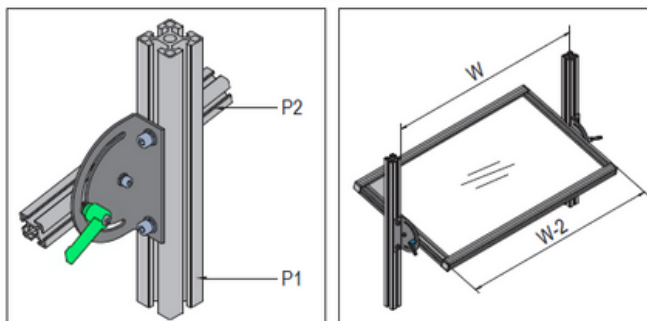





Swivel Angle Plate-PG30

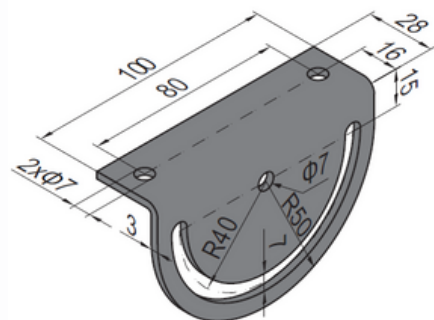

Swivel Angle Plate-PG40/45

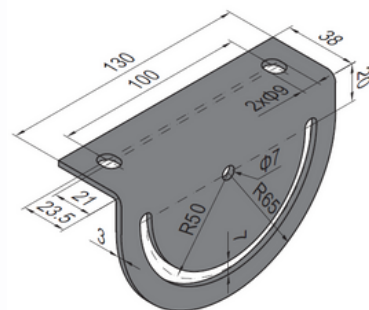


Description	P1	P2	Fastening Set	Mass (g)	Part No.
Swivel Angle Plate-PG30 (pcs)				160	8.21.30
Swivel Angle Plate-PG30 (set)	PG30	PG30	1x FR +1x FT +2x R	270	8.21.31.ST
Swivel Angle Plate-PG40/45 (pcs)				288	8.21.40
Swivel Angle Plate-PG40/45-PG30 (set)	PG40/45	PG30	1x FR +1x FT +2x FV	288	8.21.40.30.ST
Swivel Angle Plate-PG40/45-PG40/45 (set)	PG40/45	PG40/45	1x FR +1x FT +2x FW	443	8.21.40.40.ST



Potential Equaliser Nut


Accesorios Adicionales

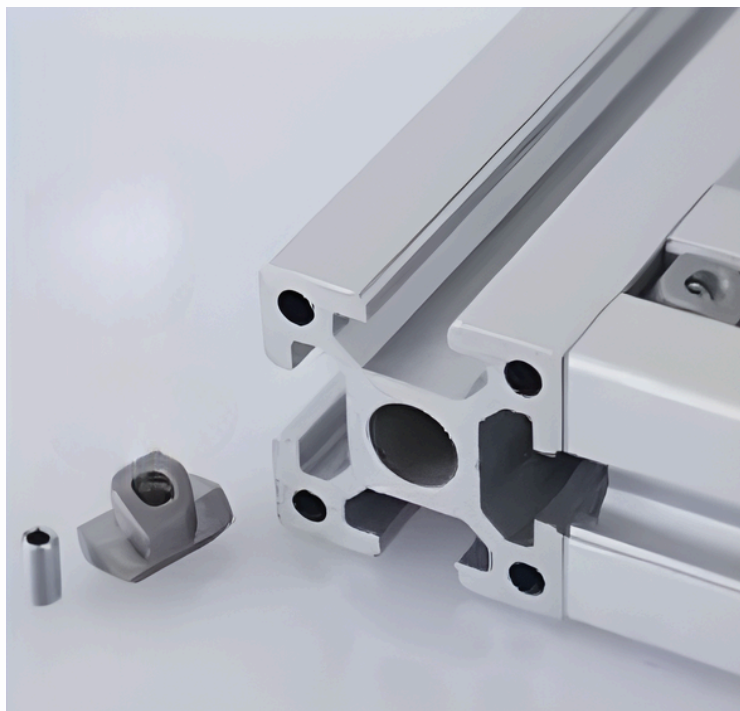



Material: Zinc alloy

La tuerca final en T se tuerce en el surco del perfil a un ángulo de 45 grados. Conduce la estática hacia dentro y anivelar el potencial.




Potential Equaliser Nut penetrates the oxide film of the profiles at 45° to conduct the static inside of the profiles and to average the potential.

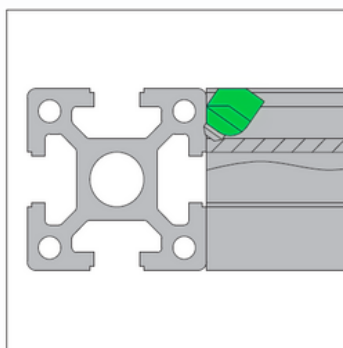


Potential Equaliser Nut-8-M4

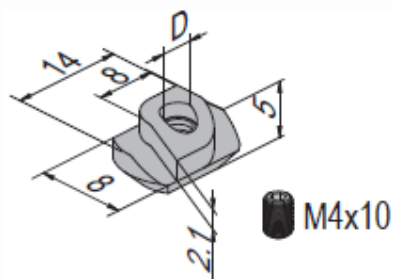

Potential Equaliser Nut-10-M5

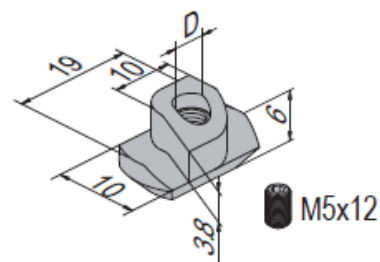




Description	D	Mass (g/pcs)	Part No.
Potential Equaliser Nut-8-M4 (with top thread)	M4	3	8.22.08.M4
Potential Equaliser Nut-10-M5 (with top thread)	M5	7	8.22.10.M5

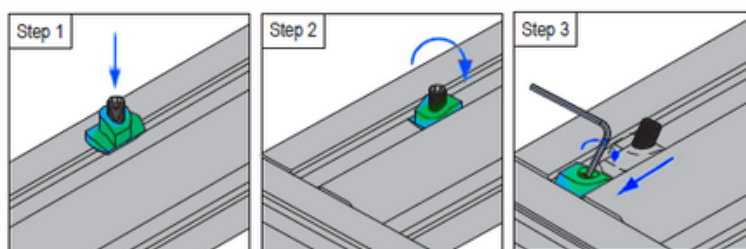

Joint


Accesorios Adicionales

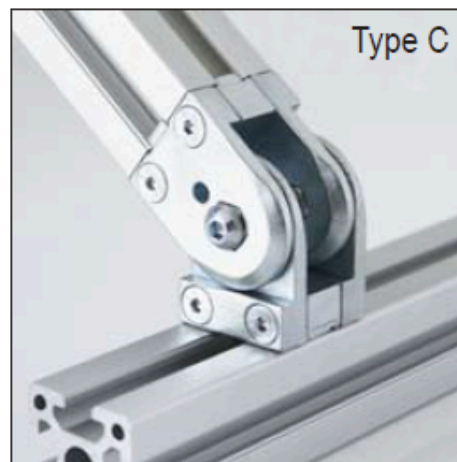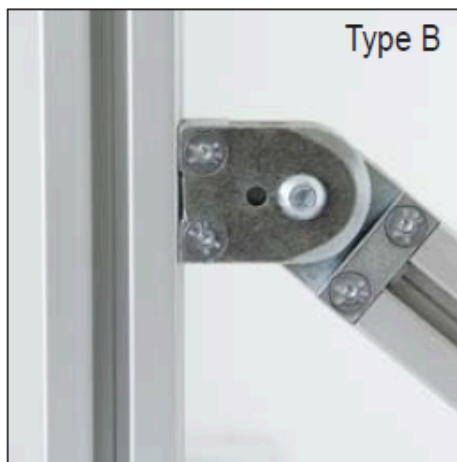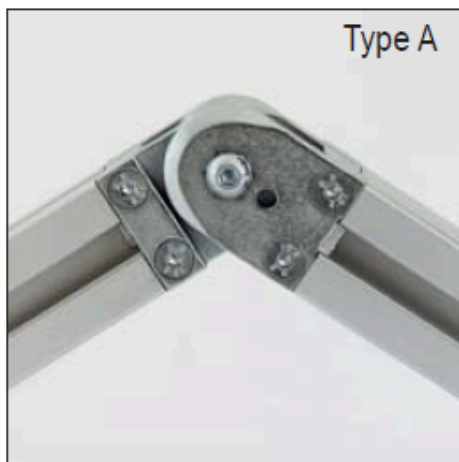


Material: Zinc plated steel

Usado para conectar perfiles movibles


To connect movable profiles

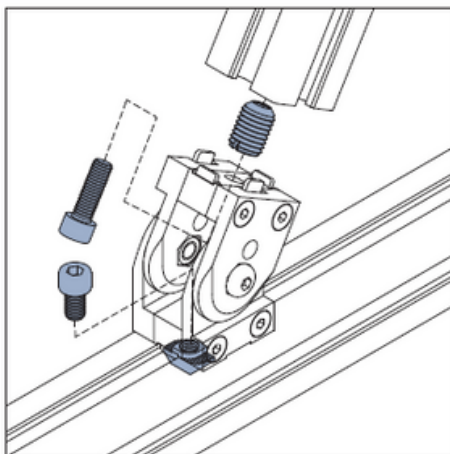


Joint- Type A

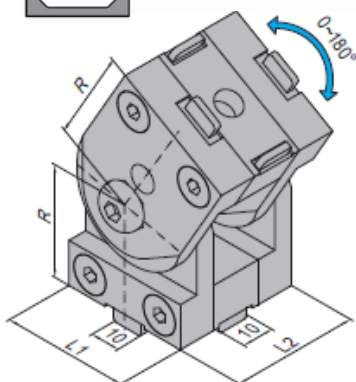

Joint- Type B

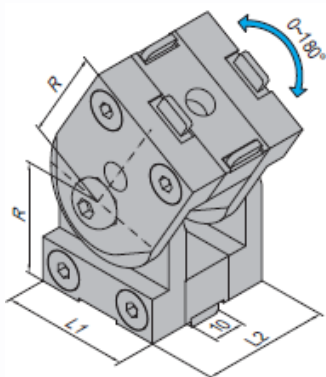


Joint- Type C




Description	L1 (mm)	L2 (mm)	R (mm)	Fastening Set	Mass (g)	Part No.
Joint-Type A- 4040	40	40	35	2x FX	560	8.31.4040A
Joint-Type A- 4060	40	60	37.5		680	8.31.4060A
Joint-Type A- 4545	45	45	35	2x FX	650	8.31.4545A
Joint-Type A- 4560	45	60	37.5		800	8.31.4560A
Joint-Type B- 4040	40	40	35	1x FD +1x FX	575	8.31.4040B
Joint-Type B- 4060	40	60	35		695	8.31.4060B
Joint-Type B- 4545	45	45	37.5	1x FD +1x FX	665	8.31.4545B
Joint-Type B- 4560	45	60	37.5		815	8.31.4560B
Joint-Type C- 4040	40	40	35	1x FD +1x FX	575	8.31.4040C
Joint-Type C- 4060	40	60	35		695	8.31.4060C
Joint-Type C- 4545	45	45	37.5	1x FD +1x FX	665	8.31.4545C
Joint-Type C- 4560	45	60	37.5		815	8.31.4560C

FD	Fastening Set	FX	Fastening Set
	M8x16 Bolt		M8x20 Bolt
	M8 T Nut		M14-M8 Hole Reducer Bolt


Joint- Type A

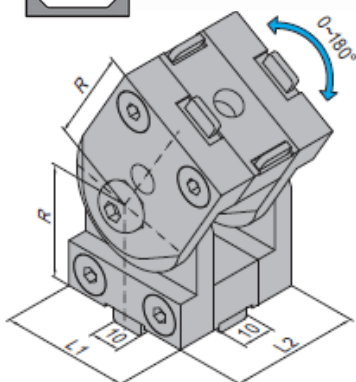

Joint- Type B



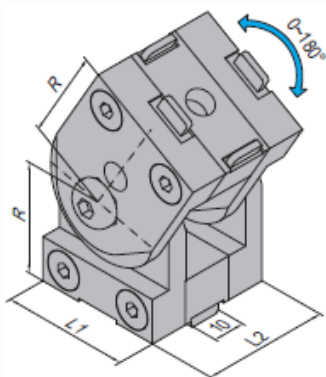


Joint- Type C



Description	L1 (mm)	L2 (mm)	R (mm)	Fastening Set	Mass (g)	Part No.
Joint-Type A- 4040	40	40	35	2x FX	560	8.31.4040A
Joint-Type A- 4060	40	60	37.5		680	8.31.4060A
Joint-Type A- 4545	45	45	35	2x FX	650	8.31.4545A
Joint-Type A- 4560	45	60	37.5		800	8.31.4560A
Joint-Type B- 4040	40	40	35	1x FD +1x FX	575	8.31.4040B
Joint-Type B- 4060	40	60	35		695	8.31.4060B
Joint-Type B- 4545	45	45	37.5	1x FD +1x FX	665	8.31.4545B
Joint-Type B- 4560	45	60	37.5		815	8.31.4560B
Joint-Type C- 4040	40	40	35	1x FD +1x FX	575	8.31.4040C
Joint-Type C- 4060	40	60	35		695	8.31.4060C
Joint-Type C- 4545	45	45	37.5	1x FD +1x FX	665	8.31.4545C
Joint-Type C- 4560	45	60	37.5		815	8.31.4560C

FD	Fastening Set	FX	Fastening Set
	M8x16 Bolt		M8x20 Bolt
	M8 T Nut		M14-M8 Hole Reducer Bolt

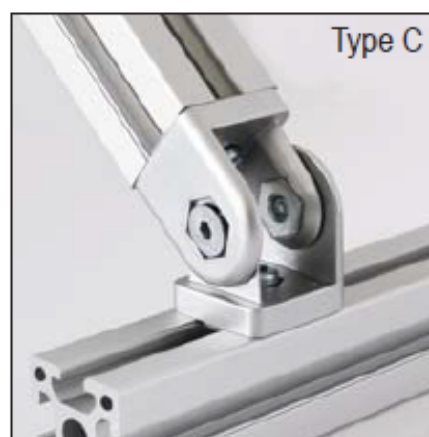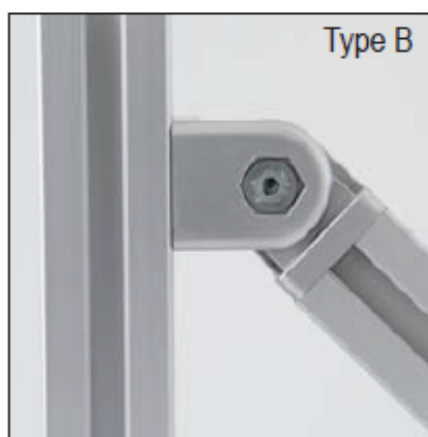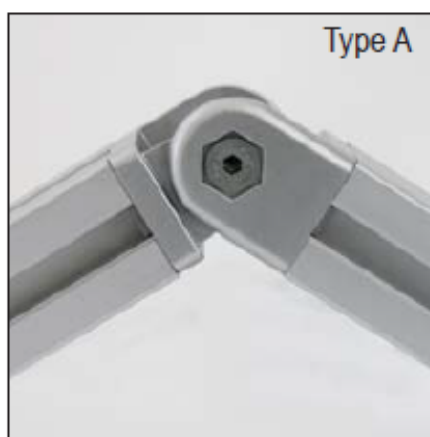


Material: Zinc alloy

Usado para conectar perfiles movibles


To connect movable profiles




Joint- Type A

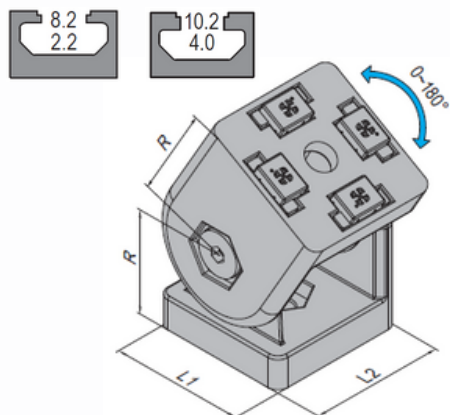






Joint- Type B

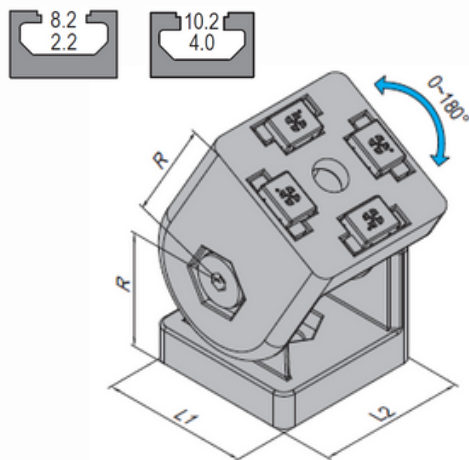






Joint- Type C

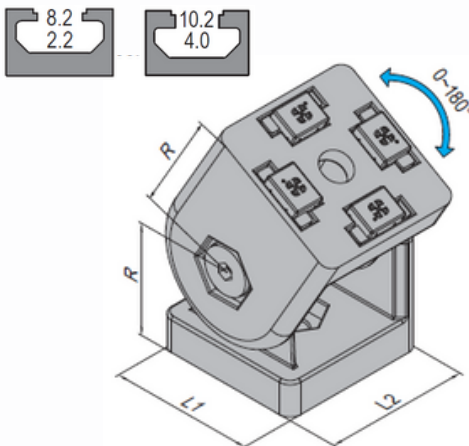

Description	L1 (mm)	L2 (mm)	R (mm)	Fastening Set	Mass (g)	Part No.
Joint-Type A- 3030	30	30	22.5	2x FO	181	8.32.3030A
Joint-Type A- 3030-RH	30	30	22.5		211	8.32.3030A.RH
Joint-Type A- 4040	40	40	30	2x FX	388	8.32.4040A
Joint-Type A- 4040-RH	40	40	30		477	8.32.4040A.RH
Joint-Type A- 4545	45	45	33.5	2x FX	530	8.32.4545A
Joint-Type A- 4545-RH	45	45	33.5		587	8.32.4545A.RH
Joint-Type B- 3030	30	30	22.5	1x FS +1x FO	167	8.32.3030B
Joint-Type B- 3030-RH	30	30	22.5		206	8.32.3030B.RH
Joint-Type B- 4040	40	40	30	1x FU +1x FX	366	8.32.4040B
Joint-Type B- 4040-RH	40	40	30		437	8.32.4040B.RH
Joint-Type B- 4545	45	45	33.5	1x FX +1x GO	510	8.32.4545B
Joint-Type B- 4545-RH	45	45	33.5		577	8.32.4545B.RH



Description	L1 (mm)	L2 (mm)	R (mm)	Fastening Set	Mass (g)	Part No.
Joint-Type C-3030	30	30	22.5	1x FS +1x FO	167	8.32.3030C
Joint-Type C-3030-RH	30	30	22.5		206	8.32.3030C.RH
Joint-Type C-4040	40	40	30	1x FU +1x FX	366	8.32.4040C
Joint-Type C-4040-RH	40	40	30		437	8.32.4040C.RH
Joint-Type C-4545	45	45	33.5	1x FX +1x GO	510	8.32.4545AC
Joint-Type C- 4545-RH	45	45	33.5		577	8.32.4545C.RH









Material: Aluminium


Cuando el marco del perfil tiene un leve dobléz causado por el peso, el frame joint se usa con conectores especiales para aumentar la estabilidad del marco.

When the profile frame is with big span and there is slight bending caused by self load, the frame joint shall be used with special connectors for cross connection to enhance the stability of the frame

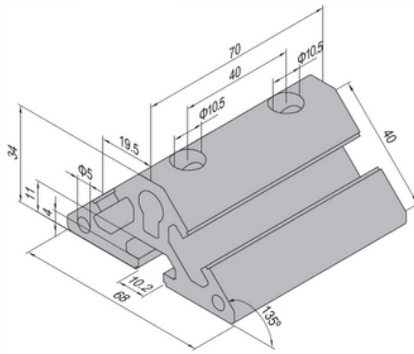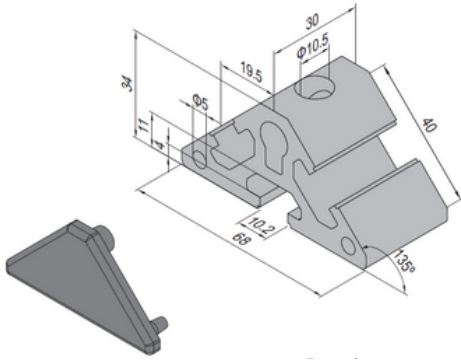

Description	Fastening Set	End Cap	Mass (g/pcs)	Part No.
PG40-4040	1x CB	2	95	8.41.4040
PG40-4080	2x CB	2	192	8.41.4080

Note: Anchor Connector to be ordered separately refer to P. 3-03 for more detail



Mounting Adaptor for Roller





Accesorios Adicionales



Material: Adaptor- Steel, zinc plated
End cap- Black PA6

Conector especial para instalaciones rápidas de
deslizadores

Special connector for quick roller installation

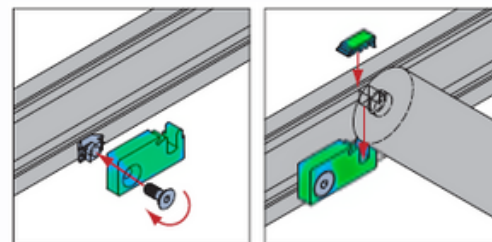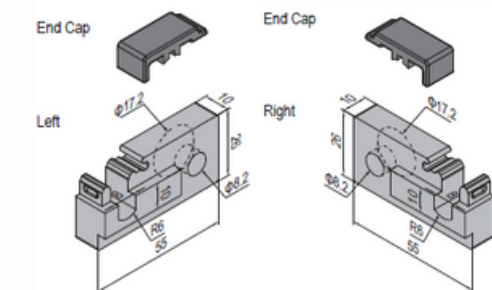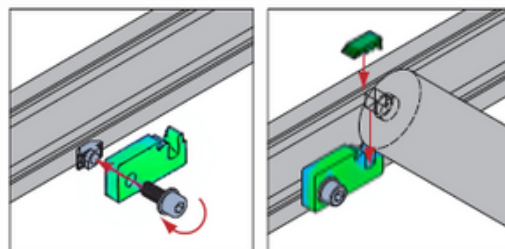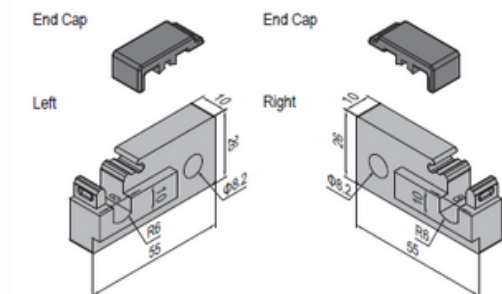

Description	Fastening Set	End Cap	Mass (g/pcs)	Part No.
Mounting Adaptor for Roller-A-Left+Right(pcs)		2	200	8.51.01A
Mounting Adaptor for Roller-A-Left+Right(set)	2x D	2	242	8.51.01A.ST
Mounting Adaptor for Roller-B-Left+Right(pcs)		2	194	8.51.01B
Mounting Adaptor for Roller-B-Left+Right(set)	2x FQ	2	226	8.51.01B.ST



D	Fastening Set	FQ	Fastening Set
	M8x20 Bolt		M8x20 Bolt
	M8 Washer		
	M8 T Nut		M8 T Nut




Telescopio estan compuestas de perfil estructural, perfil telescópico y elementos de conexión. El alcance es de 50-500mm

Telescope Unit are composed of strut profile, telescopic profile and connecting elements. The stroke of telescope unit is 50-500mm

Telescope Unit-3030

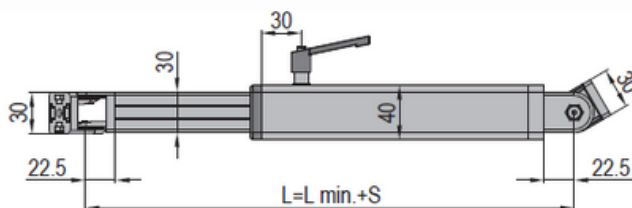



Telescope Unit-3040





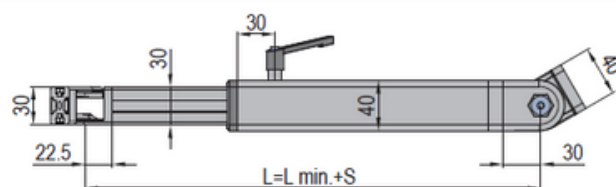


Description	Fastening Set	Stroke S(mm)	L min. (mm)	Mass (g)	Part No.
Telescope Unit-3030 (set)	2x FS	$50 \leq S \leq 200$	369	1.23	8.61.40.3030.01.ST
	2x FS	$200 < S \leq 350$	519	1.43	8.61.40.3030.02.ST
	2x FS	$350 < S \leq 500$	669	1.94	8.61.40.3030.03.ST
Telescope Unit-3040 (set)	1x FS +1x FU	$50 \leq S \leq 200$	377	1.42	8.61.40.3040.01.ST
	1x FS +1x FU	$200 < S \leq 350$	527	1.62	8.61.40.3040.02.ST
	1x FS +1x FU	$350 < S \leq 500$	677	2.13	8.61.40.3040.03.ST

Note: Offer per set. If there is any special requirement on the stroke, please contact us.




TIPO DE PERFORACIÓN




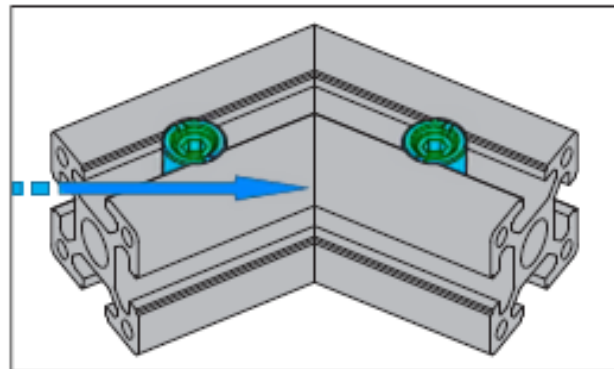
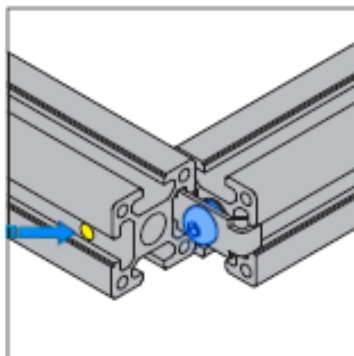
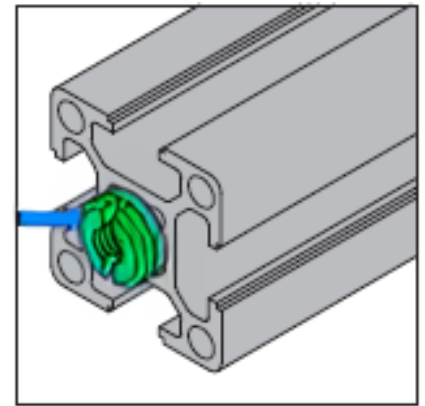
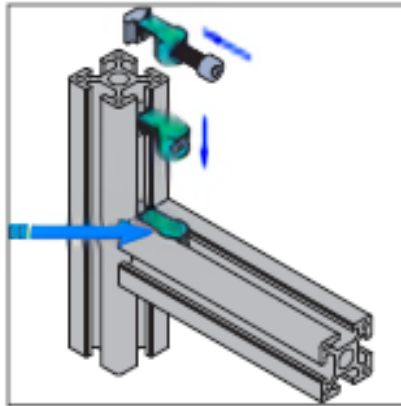
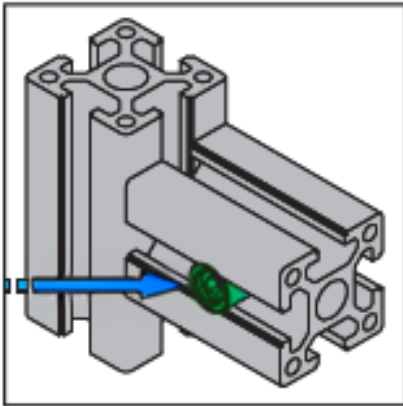


Machining Name	Application
Dowel Bore	Anchor Connector
Inner Connector Bore	Butt Connector
Screw Thread Bore	Screw Connector
Cross Bore	Screw/ End Connector
Angle cut T	Anchor Connector


Code Meanings		
First	Second	third
L (left) R (right)	D (Dowel bore)	H (horizontal) V (vertical) P (h+v)
	I (Inner connector bore)	
	S (Screw thread bore)	
	C (Cross bore)	P (h+v)
	(A B C D) T (Angle cut)	30 45 60 (angle)

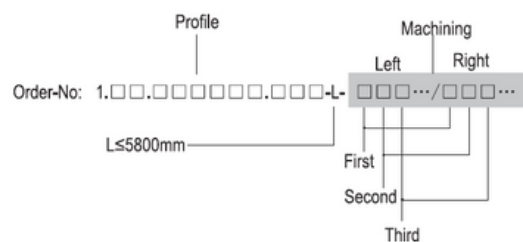


Classification		Dowel bore			
		Left		Right	
		Horizontal	Vertical	Horizontal	Vertical
Code		LDH	LDV	RDH	RDV
Square					
		—		—	
Rectangle			—		—
Arc			—		—

Classification		Inner connector bore			
		Left		Right	
		Horizontal	Vertical	Horizontal	Vertical
Code		LIH	LIV	RIH	RIV
Square					
					
		—		—	
		—		—	
			—		—
Rectangle					
					
Arc			—		—

Example A: 1. 11. 40.040040.04H-200-LIH/RIH

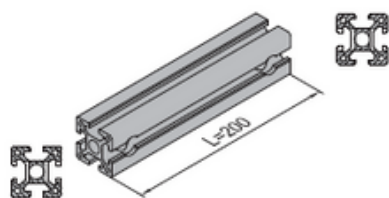


Example B: 1. 11. 40.040080.06H-200-LIV/RIH

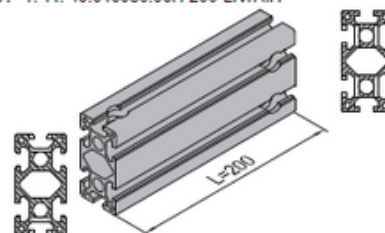


Classification		Screw thread bore					
		Left		Right		Left+Right	
Code		LSP	LMP	RSP	RMP	WSP	WMP
Square							
			—		—		—
			—		—		—
			—		—		—
Rectangle							
Arc			—		—		—


Example A:
1. 11. 40.040040.04H-200-LSP



Example B:
1. 11. 40.040080.06H-200-WSP



Example C:
1. 11. 40.040040.04H-200-LMP




Classification		Cross bore					
		Left			Right		
Code		Horizontal	Vertical	H+V	Horizontal	Vertical	H+V
		LCH	LCV	LCP	RCH	RCV	RCP
Square							
Rectangle							

Specified crossing bore code

LC□/□**RC**□-**A**□**L**-**B**□**L**...**Z**□**L**



Example: 1. 11. 40.040040.04H-400-LCH/RCH-AH120-BP230

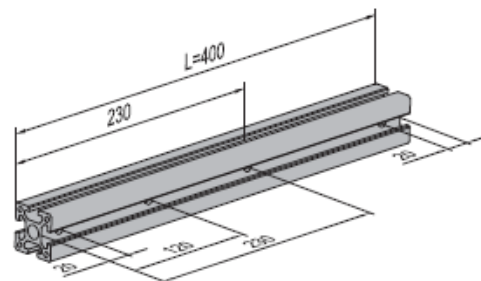

Classification		Angle cut	
		Left	Right
Code		LCT(LAT,LBT,LDT)	RCT(RAT,RBT,RDT)
Square			
Rectangle			

Specified cutting angle code

Example: 1. 11. 40.040080.06H-300-LDT45/RDT45


L $\square$ **T** α :

$\alpha=30^\circ/45^\circ/60^\circ$
 T=angle cut
 $\square=A/B/C/D$
 L=left


R $\square$ **T** α :

$\alpha=30^\circ/45^\circ/60^\circ$
 T=angle cut
 $\square=A/B/C/D$
 R=right


$\square=A$ 向





$\square=B$ 向



$\square=C$ 向



$\square=D$ 向



CATÁLOGO 2025

Advanced Sistema Modular es propiedad de TJ-SD DISTRIBUIDORES S. DE R.L. DE C.V.

Visita nuestra página web



C. Tecate 20674 Buenos Aires Nte.
C.P. 22200 Tijuana, B.C. México



Ofc: (664)379-1441
Whatsapp: (664) 771-9435
USA: (619) 883-7202



ventas@tjsd-distribuidores.com
www.tjsd-distribuidores.com



TJ-SD DISTRIBUIDORES S. DE R.L DE C.V